
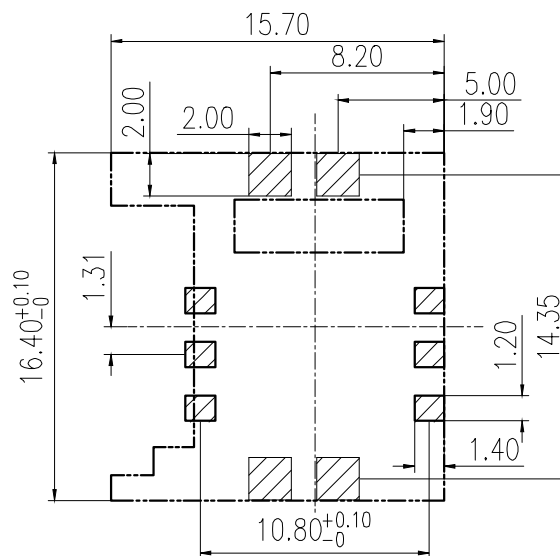
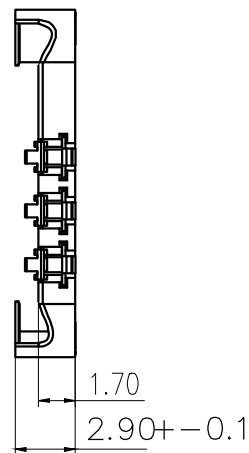
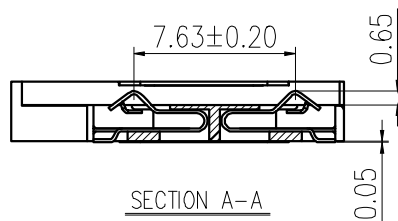


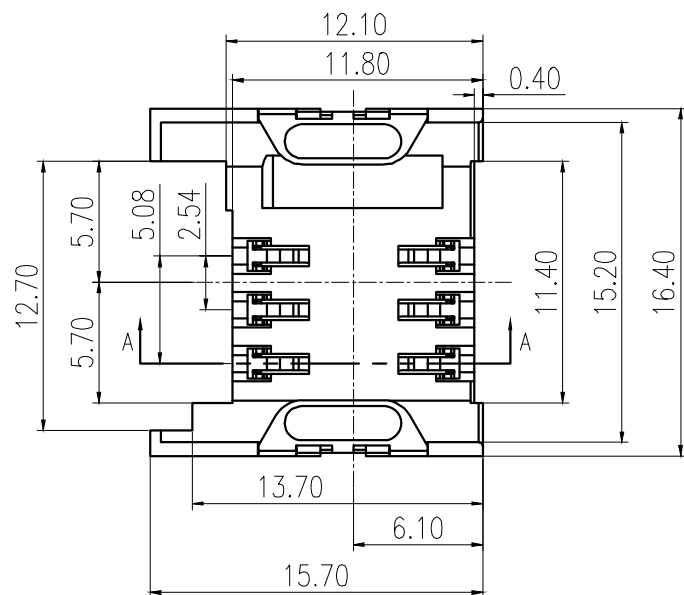

RECOMMENDED PCB LAYOUT

Notes:


Material: Phosphor Bronze(C5191-H)
SIMM Card Connector,With Cover,Type 1,8 Pin

Physical:

Housing: LCP UL 94V-0
Contact: Selective Gold Flash

Specifications:

Voltage Current rating: 1A. 50V AC
Insulation Resistance: 1000Mohm Min
Contact Withstanding Voltage: AC 500V For 1 Minute
Temperature Rating: -40° To +85°
Packing: 750Pcs/Reel

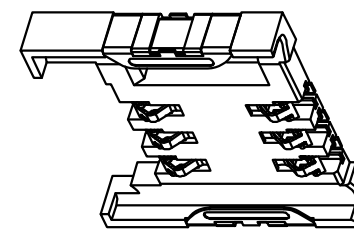

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION



ORDER INFORMATION

SCU-W1029X-06-LF

SERIES 180°SMT 06WAY LEADFREE
PCB LAYOUT WIDTH 10.8mm
HIGH 2.9mm W/O LOCATING PEG

DESCRIPTION: