



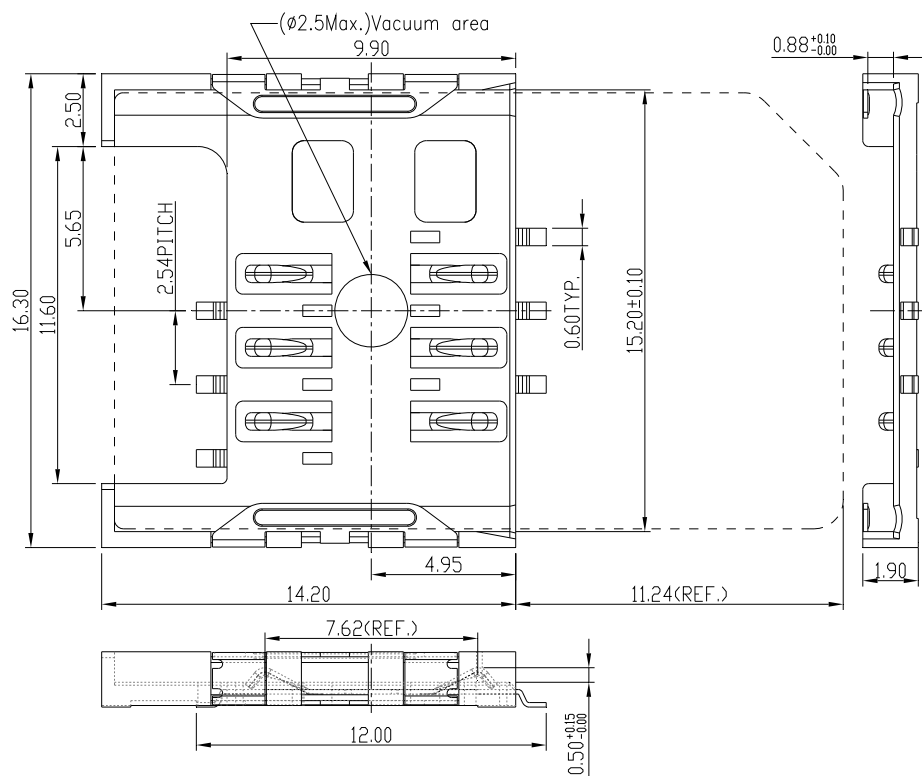

Unit: mm; Tolerances: ± 0.15 mm

Figure 5.1 Mechanical outline dimension (6 pins)

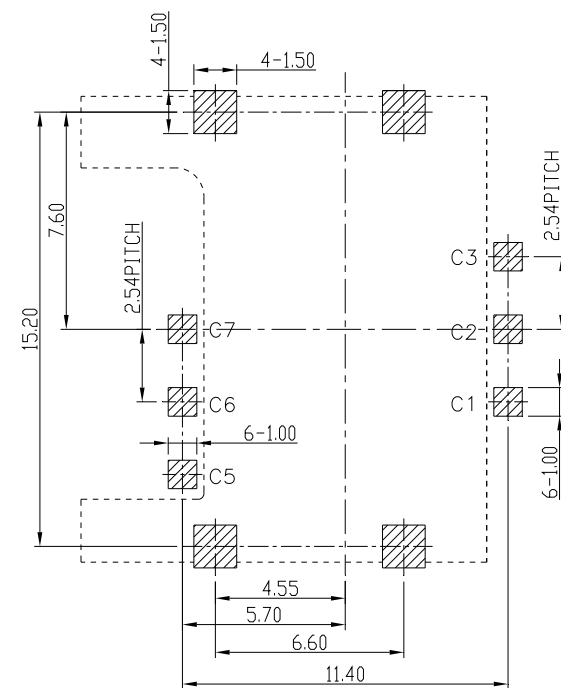

Unit: mm; Tolerances: ± 0.05 mm

Figure 5.2 Reference dimension for PCB layout (6 pins)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框


ORDER INFORMATION

SCU-W1119XR-06-LF


SERIES REEL NON POST
90°SMT HIGH 1.9mm
PAD TO PAD 11.40mm
LEADFREE
06WAY

DESCRIPTION:

PACKING INFORMATION

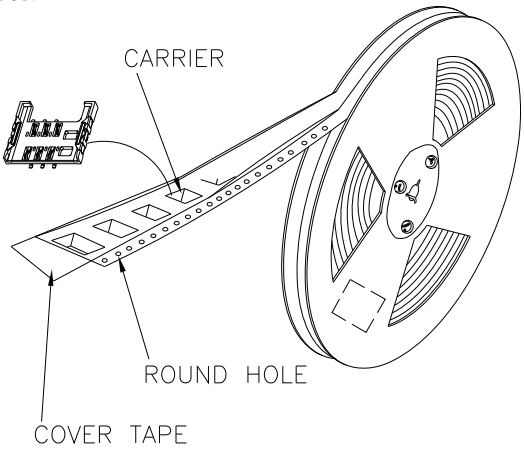

N. W. : 0.31 KGS
G. W. : 0.86 KGS
Q Y: 1,000 PCs per reel
Meas. : dia. 33 CM, W2.4 CM

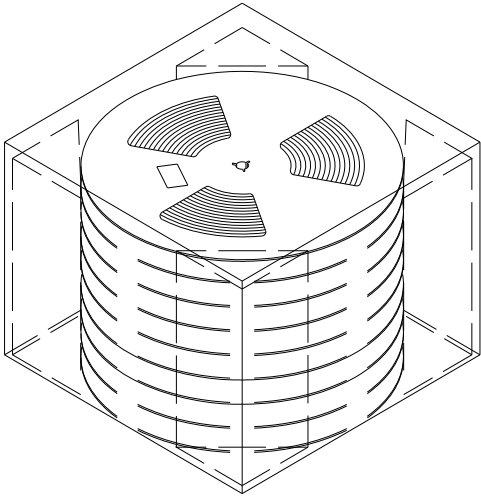

N. W. : 3.1 KGS
G. W. : 9.8 KGS
Q Y: 10,000 PCs per carton
(10 reels set in order)
Meas. : 35.0L x 35.0W x 32.5H CM

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

SCU-W1119XR-06-LF
SERIES REEL LEADFREE
90°SMT HIGH 1.9mm
PAD TO PAD 11.40mm

DESCRIPTION: