

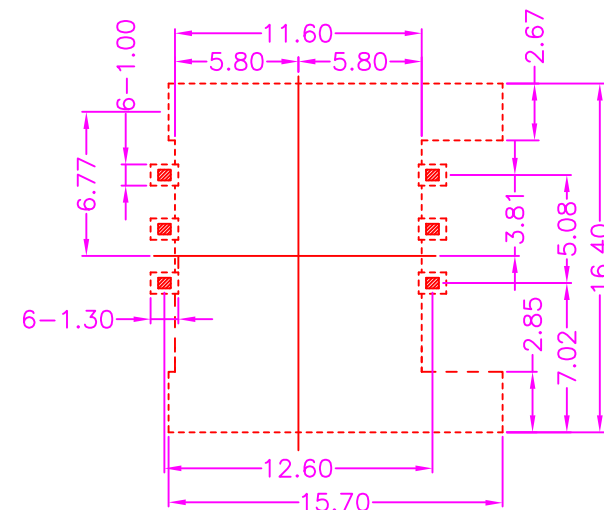


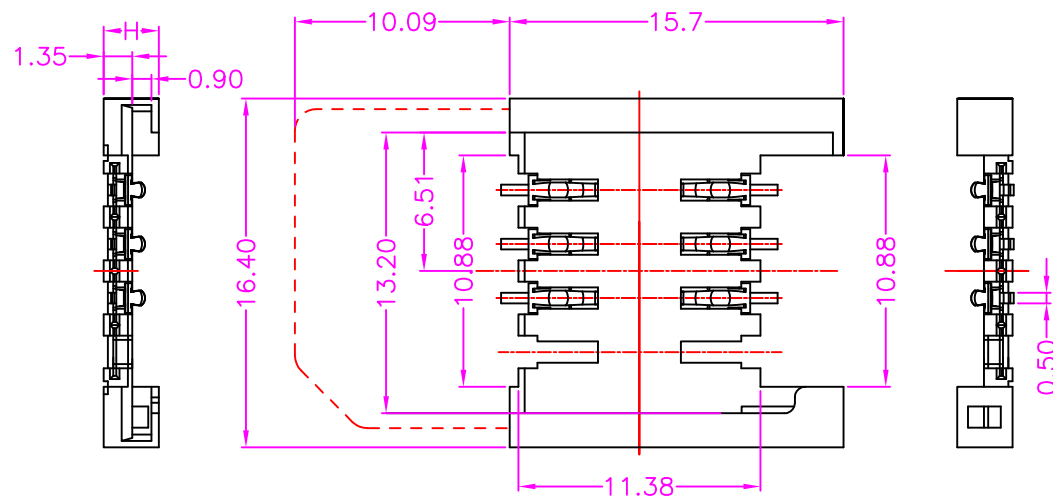

P.C.B LAYOUT
TOP VIEW ± 0.05

"H" LENGTH OPTION

- 1: 2.40mm
- 2: 2.60mm
- 3: 2.80mm
- 4: 3.00mm

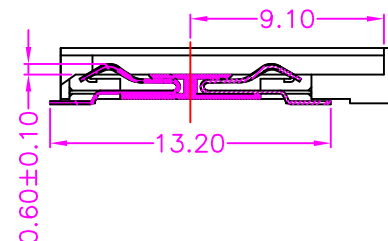


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

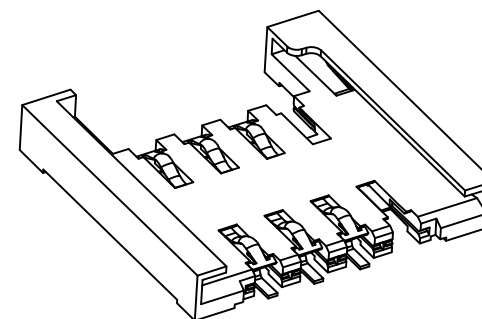

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$ 3°

PPOJECTION

照片框

ORDER INFORMATION

SCU-W12xxX-06-LF

SERIES T LEADFREE

90°SMT 06WAY

PAD TO PAD 12.60mm NON POST

24:HIGH 2.4mm

26:HIGH 2.6mm

28:HIGH 2.8mm

30:HIGH 3.0mm

DESCRIPTION: SIM CARD, 6 PIN, PCB MOUNT, SMT, FEMALE (LONG PIN)