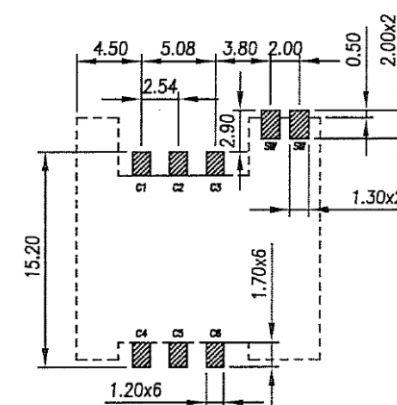
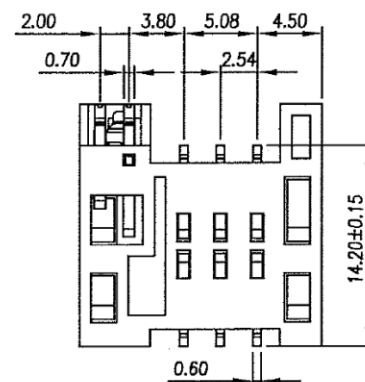
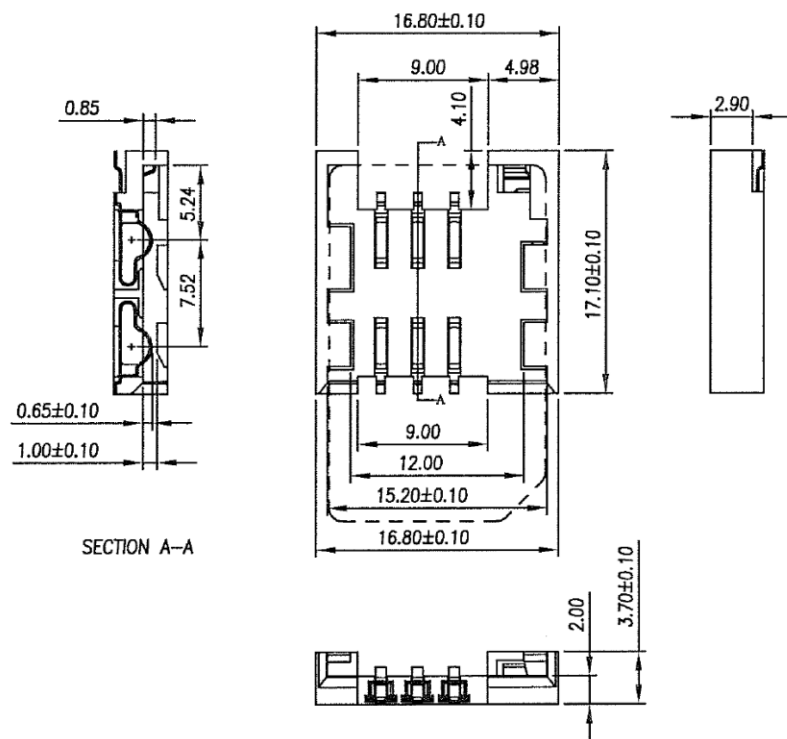


NOTES:

1.General Characteristics

Dimensions:17.10Lx16.80Wx3.70H mm
Weight:Approx. 0.8g±0.20g
Contact principle:Friction technology
Operating position:Shaft up/Down/Horizontal
Mounting System:SMT(without post)
Durability:5,000 cycles min.

2.Material:

Insulation material:Thermoplastic,UL94V-0

3.Electrical Characteristics

Number of contacts:6 pins
Contact resistance:50 mΩ typical,100 mΩ max.
Insulation resistance:>1000MΩ /500 VDC
Switch Type:Blade.
Operation:Normally open.

4.Solderability

Wave: Not applicable
Vaporphase:215°C,30 sec. MAX.
IR reflow:230°C,15sec. MAX.
Manual soldering:360°C,3 sec. MAX.

5.Environmental Characteristics

Operating temperature:-40°C~+85°C
Operating humidity:10%~95%RH
Storage temperature:-40°C,+85°C
Storage humidity:10%~95%RH
Thermal shock: -40°C~+85°C , 5 cycles
Damp Heat:40°C,90%RH,10days.
Salt-mist:35°C,5%,NaCl,24Hrs.

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

SCU-W1337XB-06-LF

SERIES 90°SMT
LEADFREE
06WAY
OPEN SWITCH
NON POST
HIGH 3.70mm
PAD TO PAD 13.5mm

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com