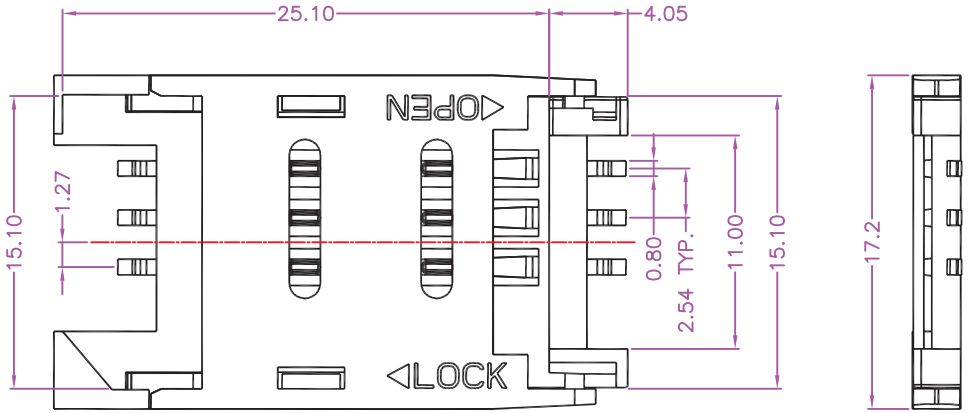

MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
TERMINAL: COPPER ALLOY, GOLD PLATING ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 100m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

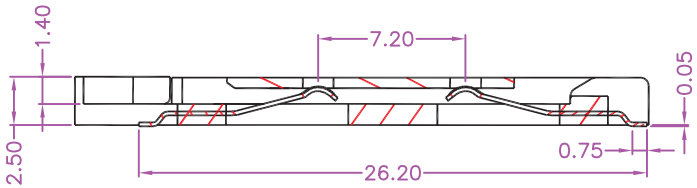

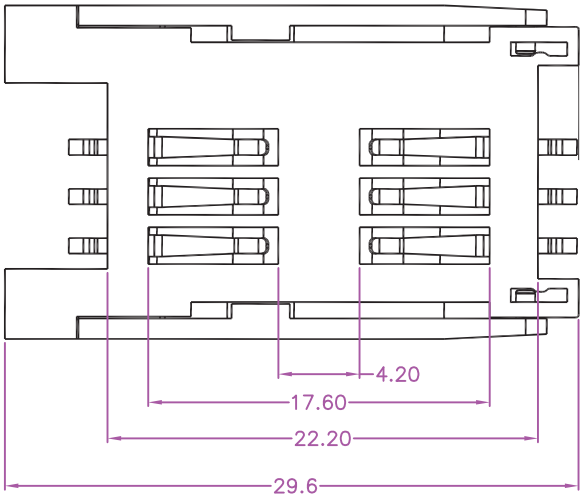

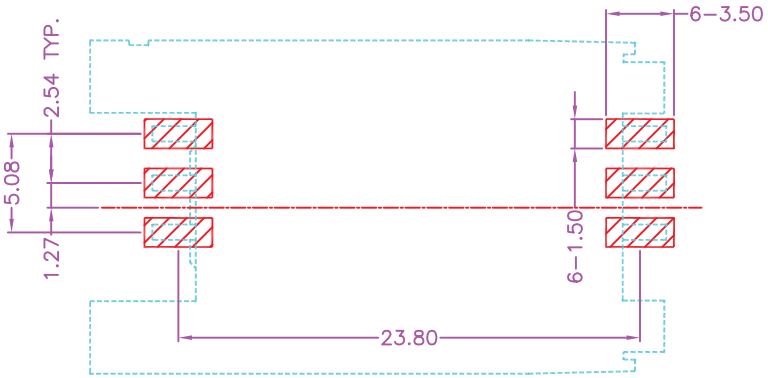

P.C.B LAYOUT
TOP VIEW ±0.05

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ± 0.40 .X ± 0.30 .XX ± 0.20 .XXX ± 0.10 ANG ±
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

SCV-W2325X-06-LF

- SERIES
- 90°SMT
- PAD TO PAD 23.80mm
- BODY HIGH 2.50mm
- NON POST
- 06WAY
- LEADFREE

DESCRIPTION: SIM CARD, PCB MOUNT, SMT, ALL PLASTIC, HINGE TYPE, FEMALE, 6 PIN