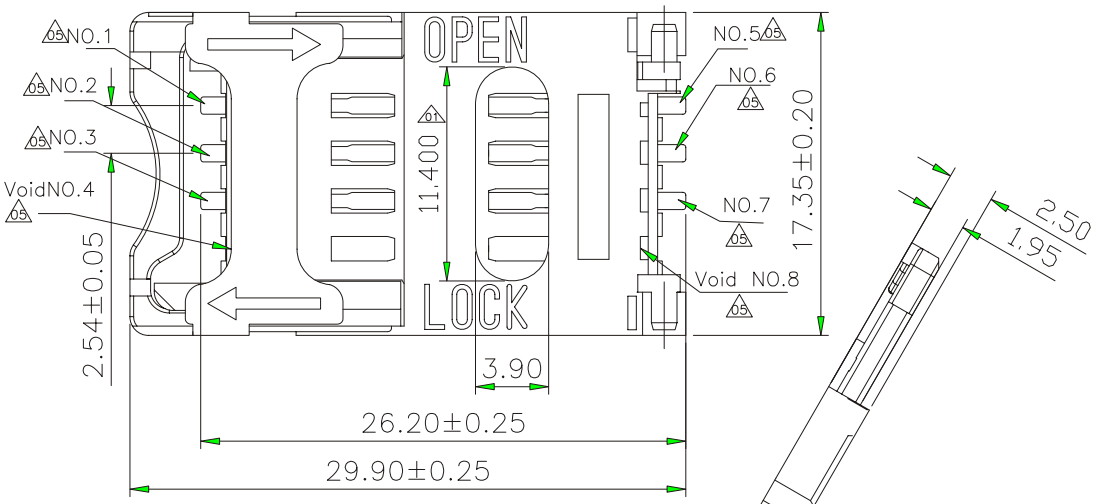

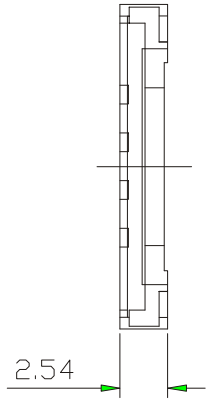

Specifications

Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 250VAC
Contact Resistance: 100mΩ Max
Operating Temperature:−40°C to +85°C
Max Process Temp:200°C for 20~30 sec.
(230°C for 10−15seconds)

Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V−0
Nylon6T Or Equivalent material(Housing 1)
Nylon 46 Or Equivalent material(Housing 2)

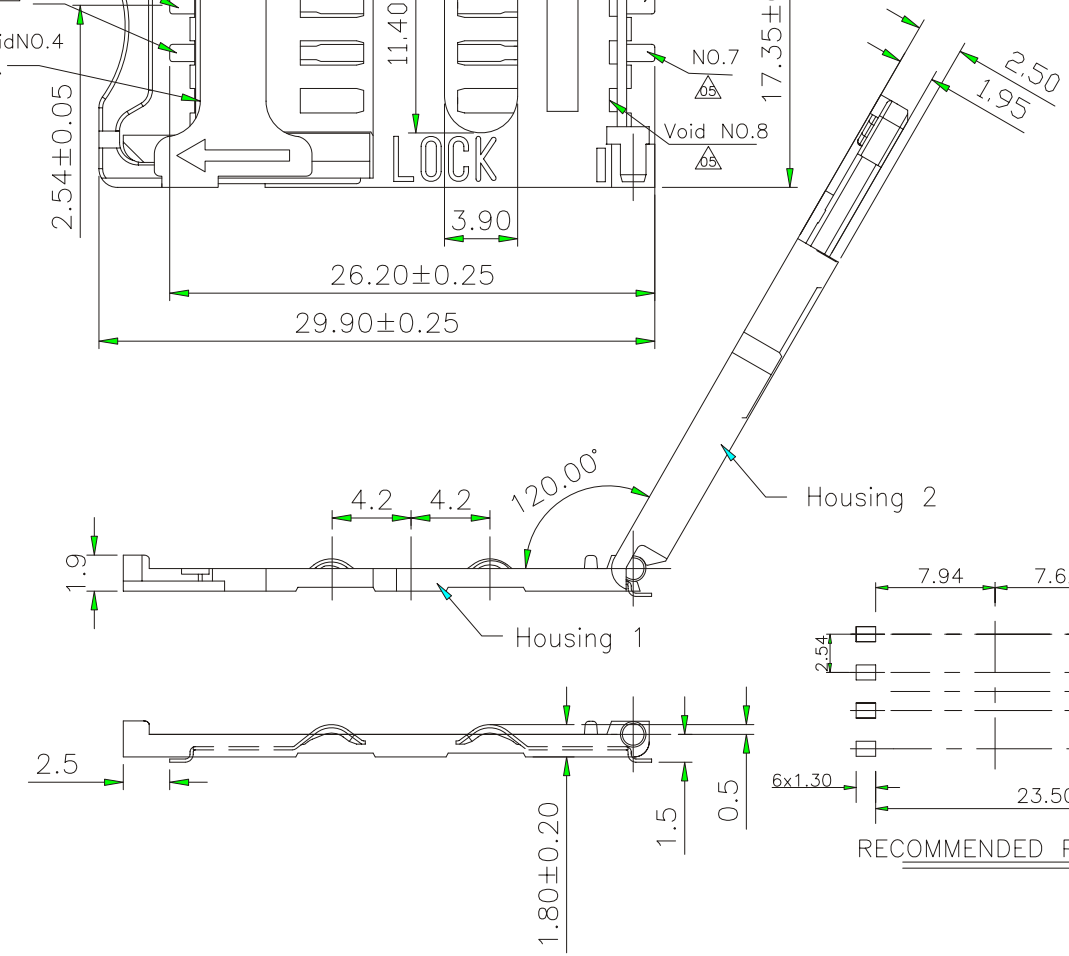

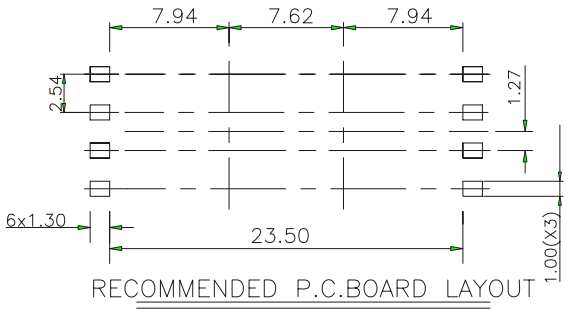

RECOMMENDED P.C.BOARD LAYOUT

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SCV-W2425X-06-LF

- SERIES
- 90°SMT
- PAD TO PAD 24.80mm
- BODY HIGH 2.54mm
- NON POST
- 06WAY
- LEADFREE

DESCRIPTION: