
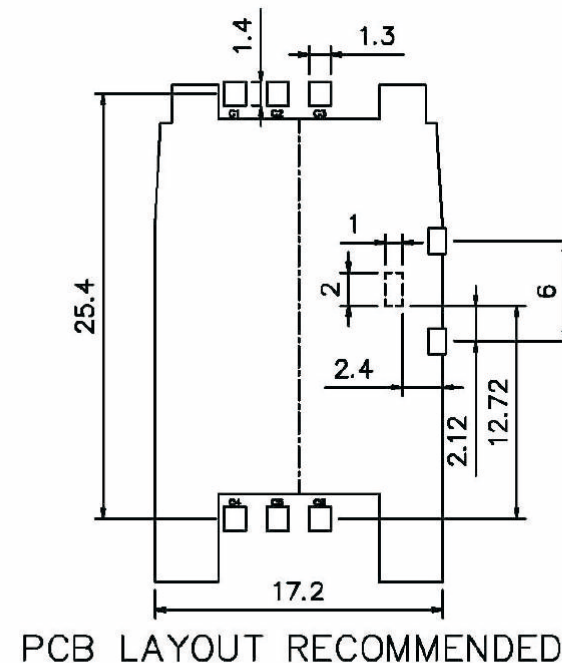
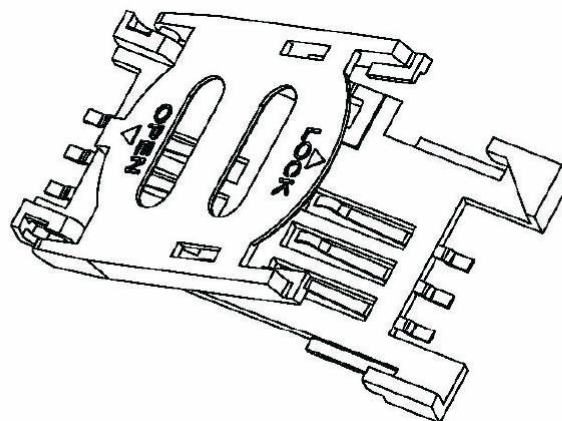


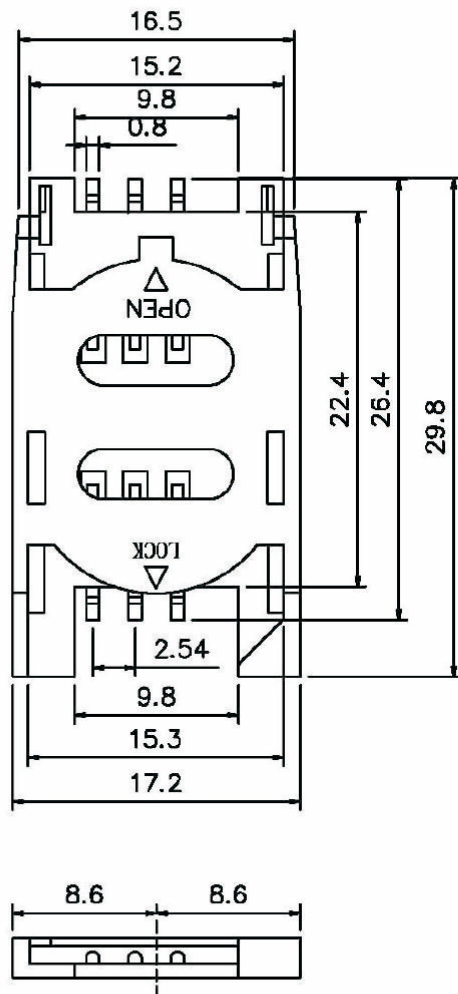

**SIM Card Connector,With
Cover,Type 1,8 Pin**
Physical:
Housing: LCP UL 94V-0
Contact: Selective Gold Flash
Specifications:
Voltage Current rating: 1A. 50V AC
Insulation Resistance: 1000Mohm Min
Contact Withstanding Voltage:
AC 500V For 1 Minute
Temperteure Rating: -40° To +85°

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SCV-W2522XB-06-LF
SERIES | | | | LEADFREE
90°SMT | | | | 06WAY
| | | | OPEN SWITCH
| | | | NON POST
| | | | BODY HIGH 2.2mm
| | | | PAD TO PAD 25.40mm

DESCRIPTION: