



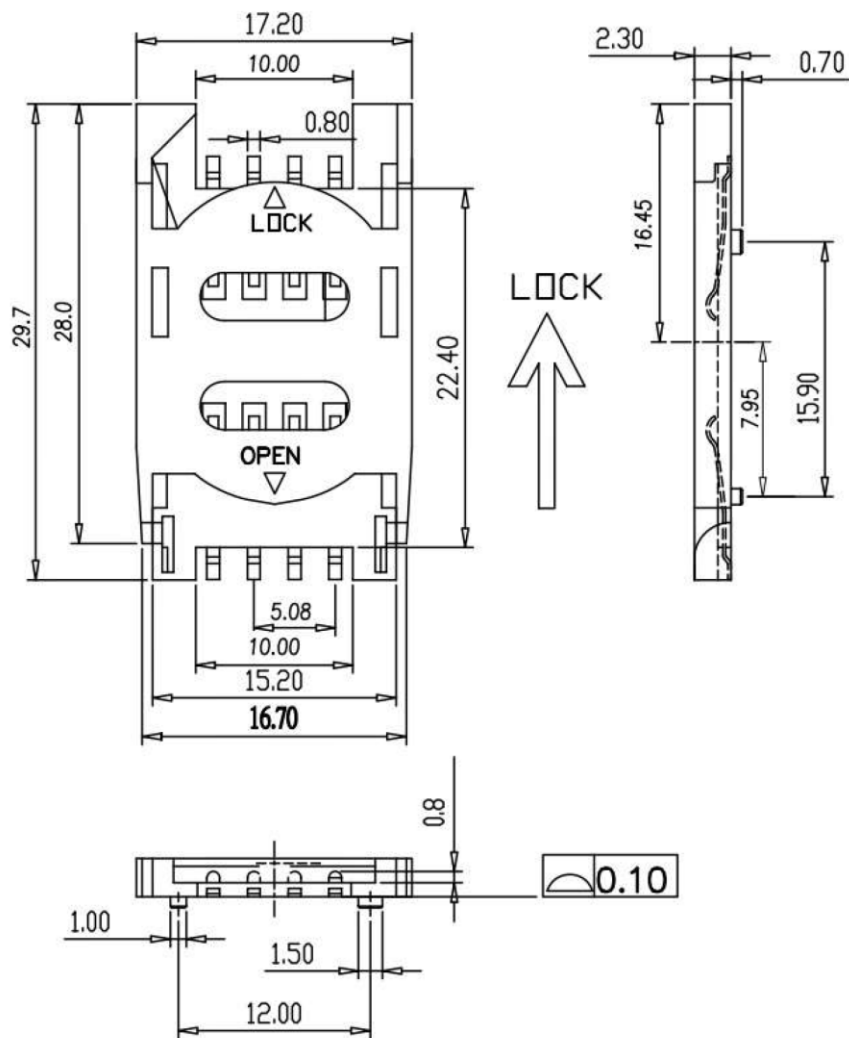

PCB LAYOUT RECOMMENDED

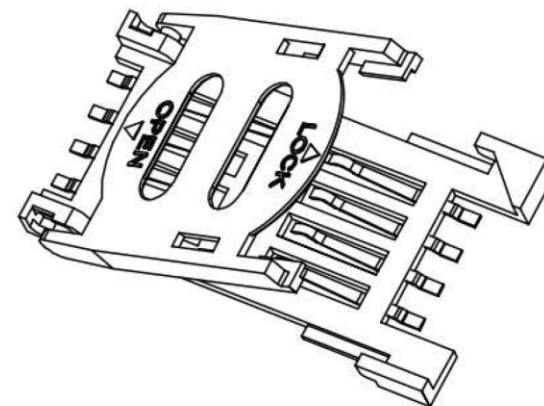

Notes:

Material: Phosphor Bronze(C5191-H)

SIM Card Connector,With

Cover,Type 1,8 Pin

Physical:

Housing: LCP(NY 9T) UL 94V-0

Contact: Selective Gold Flash

Specifications:

Voltage Current rating: 1A. 50V AC

Insulation Resistance: 1000Mohm Min

Contact Withstanding Voltage:

AC 500V For 1 Minute

Temperature Rating: -40° To +85°

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ± 1°

照片框

ORDER INFORMATION

SCV-W2523P-08-LF

SERIES

LEADFREE

08WAY

WITH LOCATING PEG

BODY HIGH 2.3mm

PAD TO PAD 25.2mm

90°SMT

DESCRIPTION: