


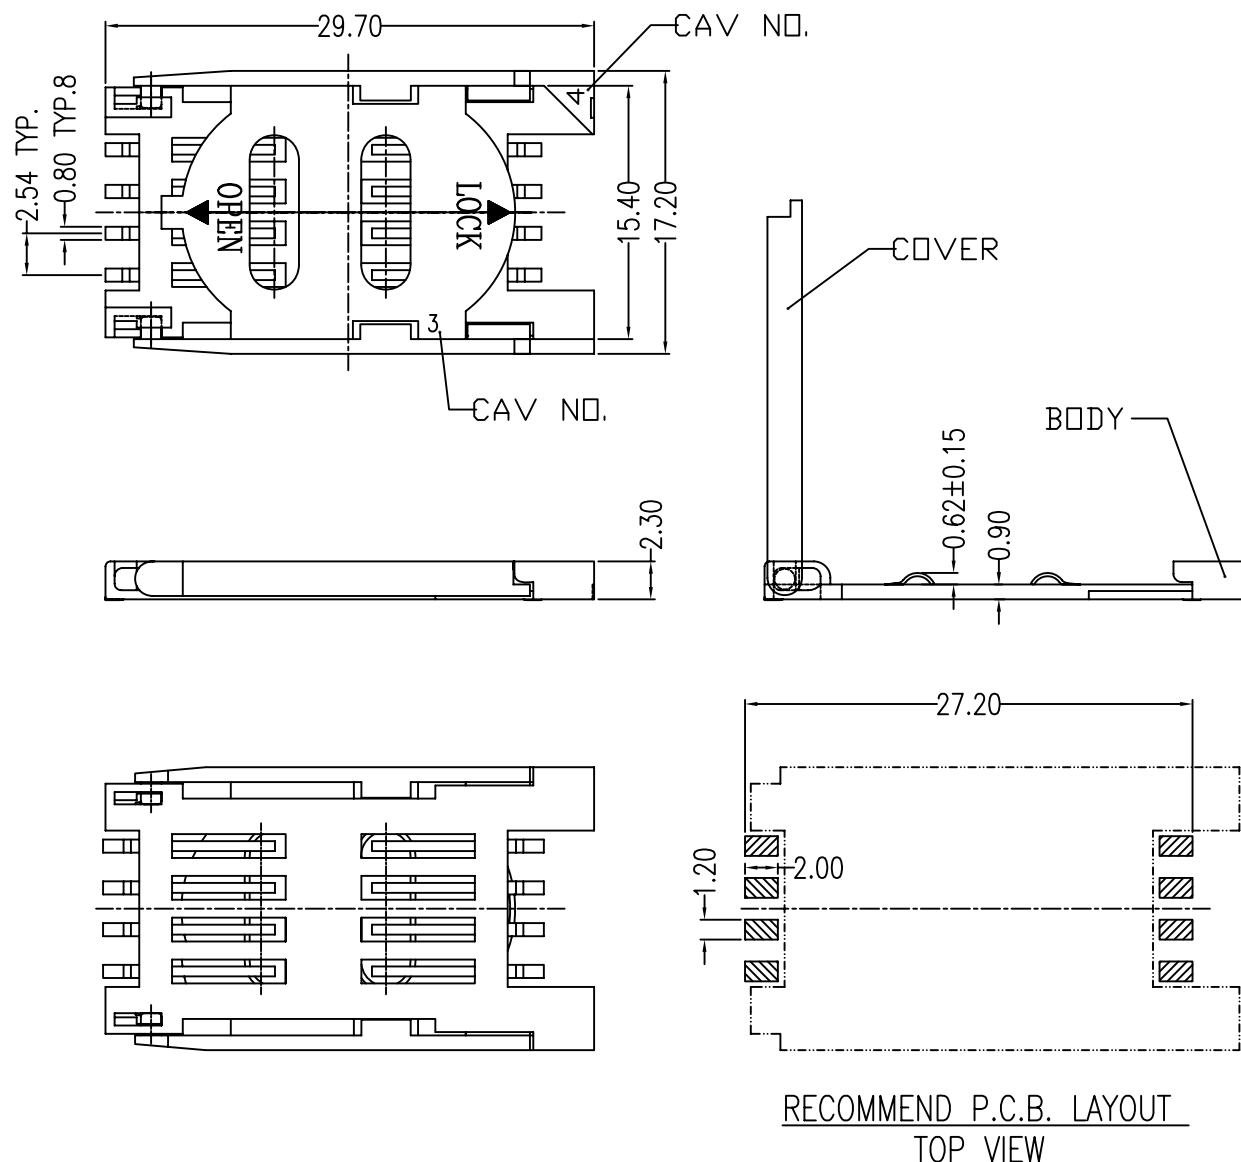

NOTES

*Material:

- 1.Body: PPS UL 94V-0 Rated, Color:Black;
- 2.Cover: PPS UL 94V-0 Rated, Color:Black;
- 3.Contact: Phosphor Bronze;
- 4.Contact Plating: Gold Plating Over Nickel on Contact Area, Tin Plating on Terminal.

*Specification:

- 1.Current Rating: 0.5 AMP. Max.;
- 2.Dielectric Withstanding Voltage: 500V AC R.M.S for One Minute;
- 3.Insulation Resistance: 1000 M Ohms Min. AT 500V AC;
- 4.Contact Resistance: 30 M Ohms Max.;
- 5.Operating Temperaturd: -25°C to +85°C;
- 6.Processing Temp: 230°C for 30~60 Seconds MAX.;
- 7.Durability: 5000 Cycles.

RECOMMEND P.C.B. LAYOUT
TOP VIEW

照片框

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.20
ANG ±

PPOJECTION

ORDER INFORMATION

SCV-W2523X-08-LF

SERIES | LEADFREE
08WAY
NON POST
BODY HIGH 2.3mm
PAD TO PAD 25.2mm
90°SMT

DESCRIPTION: SIM CARD 08 PIN SOCKET