
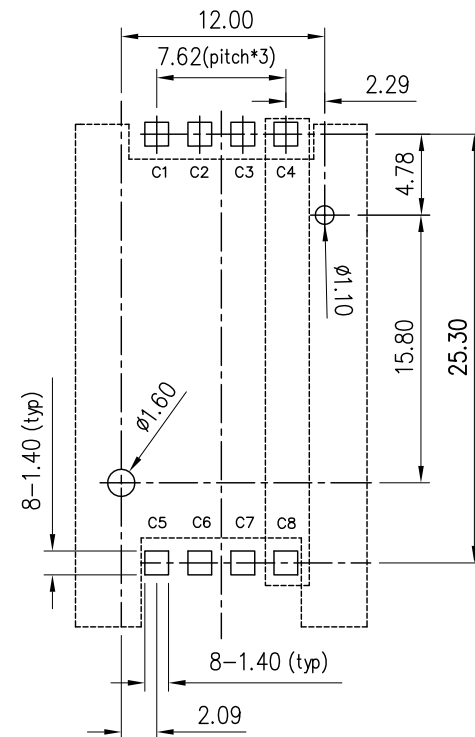
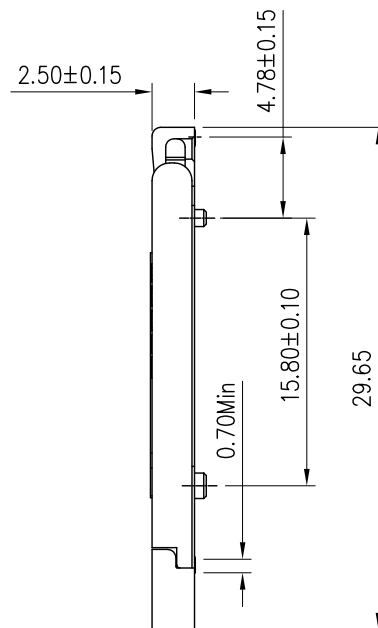


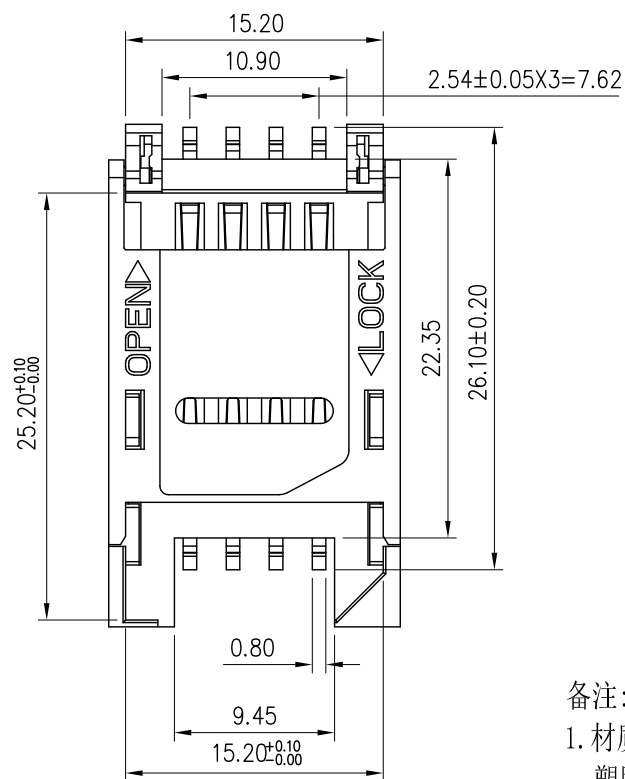

PCB LAYOUT
TOLERANCE: 0.05mm

备注:

1. 材质.

塑胶体: LCP E130I, UL94V-0

五金件: C5191R-H T=0.20mm

2. 电镀.

五金件: 镍底50~80U", 镀锡80~100U", 镀金2U".

3. 产品性能.


端子正向力: 0.6~1.0N;

开卡力: 3~9N; 关卡力: 2~6N;

寿命: 5,000 cycles Min;

接触阻抗: 100mΩ Max;

绝缘阻抗: 1000MΩ/500V DC Min;

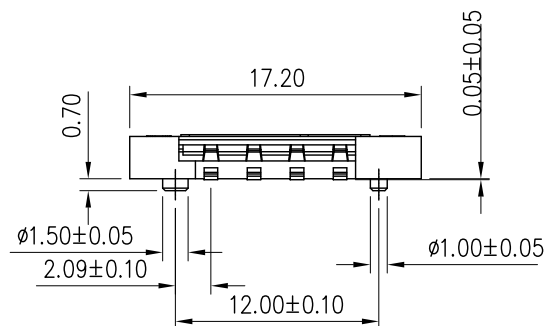

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SCV-W2525P-08-LF

SERIES 90°SMT
LEADFREE
08WAY
POST
BODY HIGH 2.5mm
PAD TO PAD 25.30mm

DESCRIPTION: