

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 TERMINAL: PHOSPHOR BRONZE, GOLD PLATED ON CONTACT
 AREA TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

PIN NO.	NAME
C1	Vcc
C2	RST
C3	CLK
C5	GND
C6	Vpp
C7	I/O

CONNECTOR PIN NO.	DESCRIPTION
C1	VCC:Power Voltage
C2	RST:Reset signal
C3	CLK:Clocking signal
C5	GND:Power and Signal Ground
C6	VPP:Porgraming Voltage
C7	I/O:Serial date input/output

RoHS Compliant

TOLERANCES ARE



DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4 PPROJECTION

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

煜倫股份有限公司

www.morethanall.com

照片框


ORDER INFORMATION

SCV-W2525XR-06-LF
 SERIES | | | | LEADFREE
 | | | | 06WAY
 | | | | REEL
 | | | | NON POST
 90°SMT | | | | BODY HIGH 2.5mm
 | | | | PAD TO PAD 25.54mm



DESCRIPTION: SIM CARD, 6PIN, PCB MOUNT, SMT, HINGE TYPE

Tape carrier packing information


Carrier Dimensions Diagram

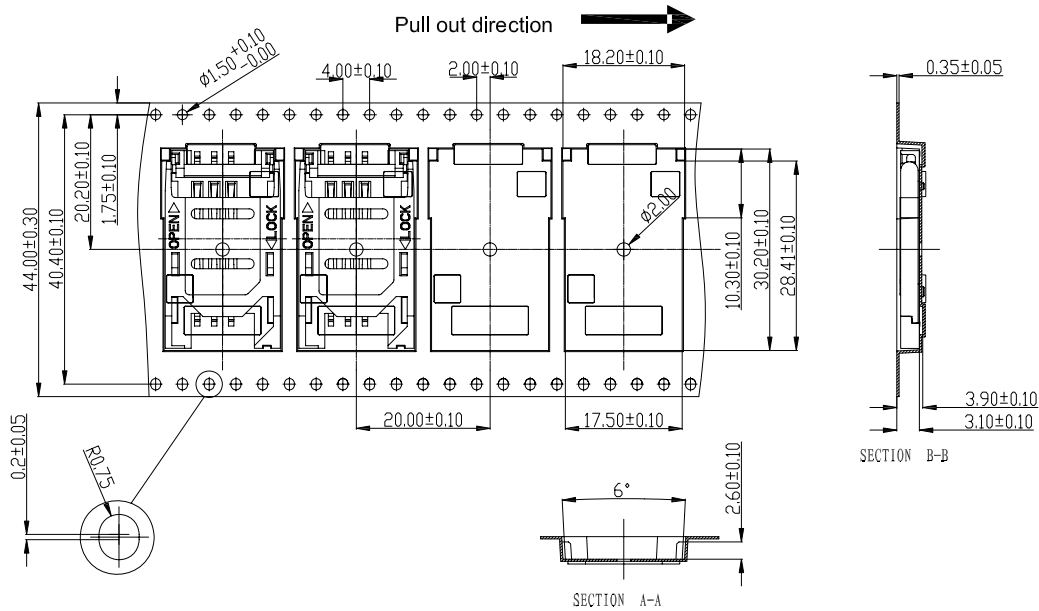

Reel Form Diagram

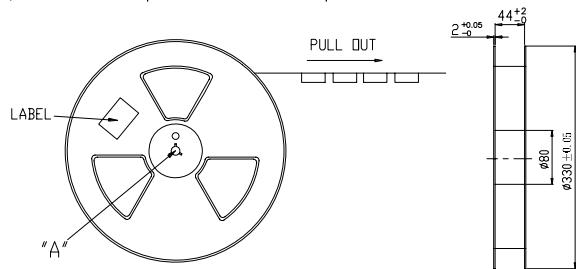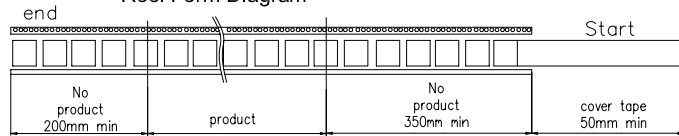

G.W.:1.37 KG
Q'ty:800 pcs/Reel

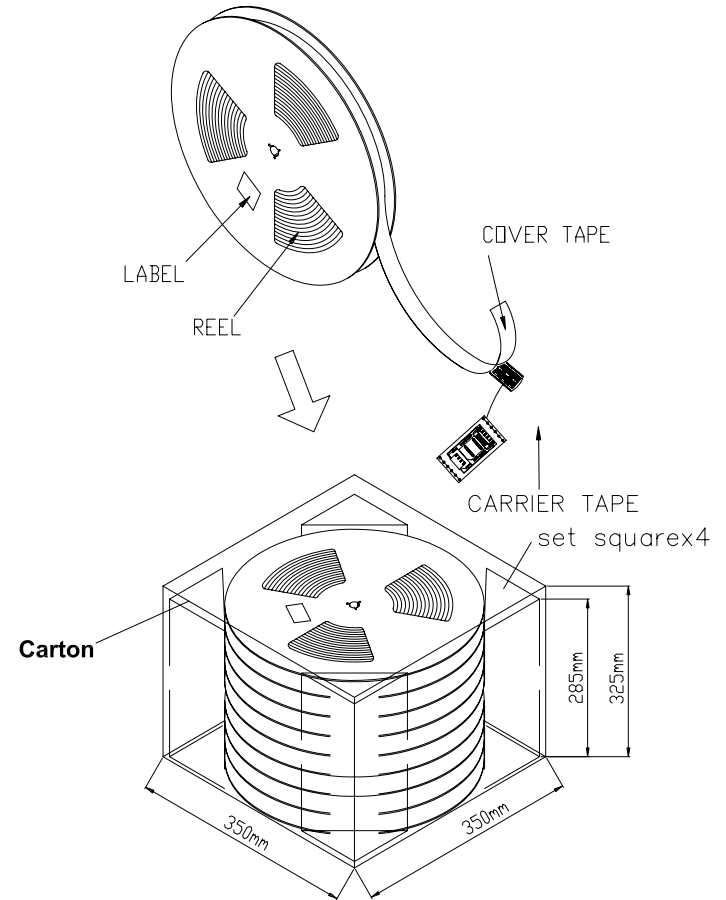

N.W.:4.85 KG

G.W.:9.59 KG

Q'ty: 4800 pcs per Carton (6 Reel set in order)

Meas: 35.00L×35.00W×31.50H cm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PJECTION

照片框

ORDER INFORMATION

SCV-W2525XR-06-LF
SERIES | | | | LEADFREE
| | | | 06WAY
| | | | REEL
90°SMT | | | | NON POST
| | | | BODY HIGH 2.5mm
| | | | PAD TO PAD 25.54mm

DESCRIPTION: SIM CARD, 6PIN, PCB MOUNT, SMT, HINGE TYPE

煜倫股份有限公司

www.morethanall.com