
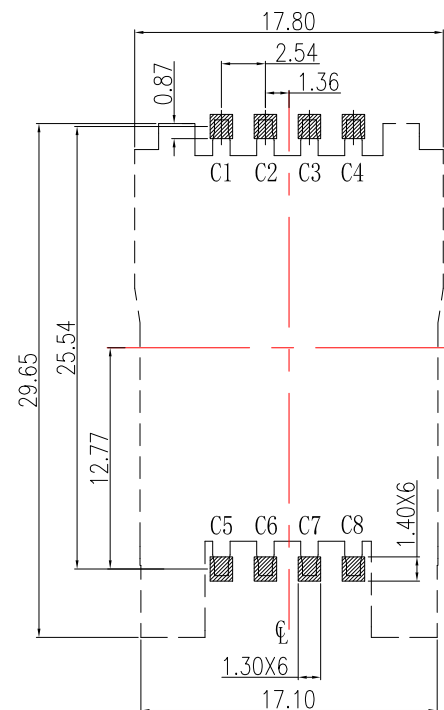
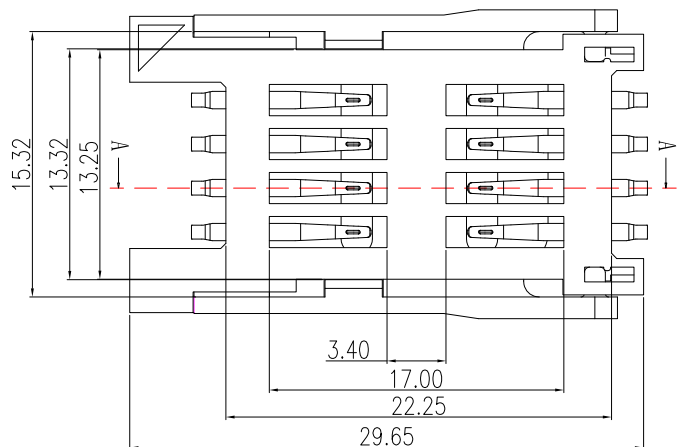
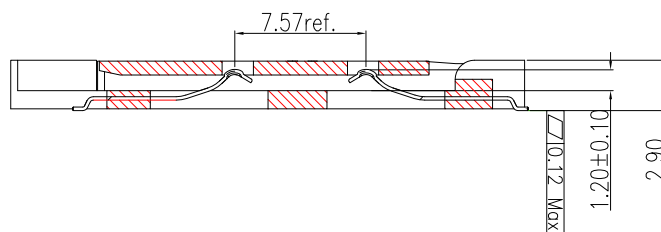


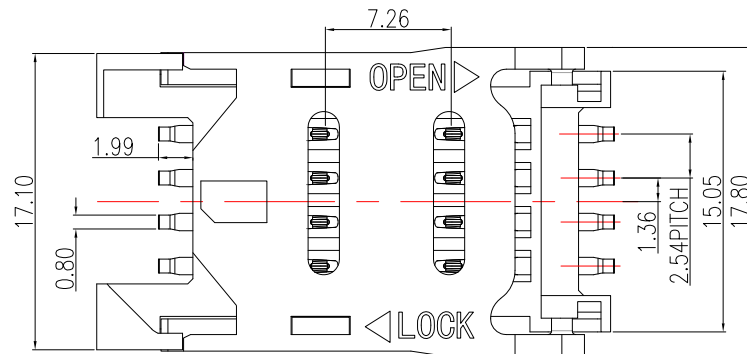


RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05

- A.Material:
- 1.Insulator:High temperature thermoplastic UL94V-0,(BLACK LCP)
 - 2.Pho.Bronze:Plating, 50U" MIN NICKEL UNDERPLATED; 3-8U" GOLD ON THE CONTACT AREA; 100U" TIN PLATING ON SOLDER TAIL

- B.Electrical specifications:
- Voltage rating: 10 V AC
Current rating: 0.5A
Dielectric strength: 500V AC for 1 minute min
Insulation resistance: 1000 M ohm
Contact resistance: 100 mill.ohm max
Operation temperature: -25° to $+95^{\circ}$
Product withstanding rff low soldering 260° for 10s

- C.Mechanical specifications:
- 3.1 Durability: 5000 cycles

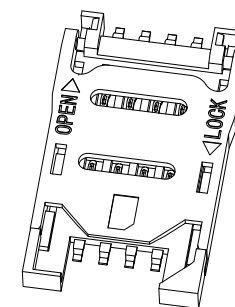

SIM卡引脚功能定义

触电极	分配	触电极	分配
C1	电源电压 VCC	C5	地 GND
C2	复位 RESET	C6	编程电压 VPP
C3	时钟 CLOCK	C7	输入/输出 I/O
C4	不提供触点	C8	不提供触点

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG $\pm$

照片框

ORDER INFORMATION

SCV-W2529X-08-LF
SERIES
90°SMT
LEADFREE
08 WAY
NON POST
HIGH 2.90mm
PAD TO PAD 25.54mm

DESCRIPTION: 2.5H 8PIN SIM CARD