
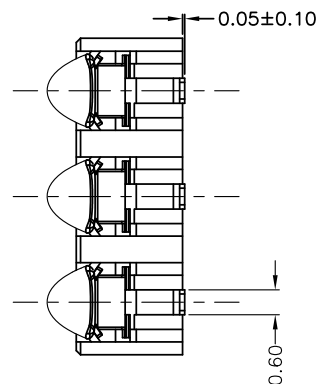



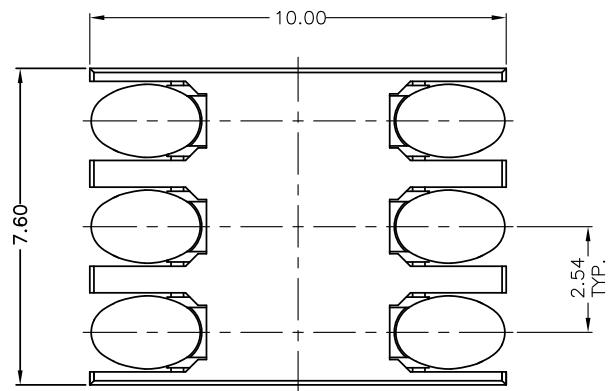


MATERIALS:

1. HOUSING : THERMOPLASTIC (UL94V-0), BLACK.
2. TERMINAL : COPPER ALLOY T=0.12mm
GOLD PLATED OVERALL.

RATING

1. CURRENT RATING : 0.5 A.
2. OPERATING VOLTAGE: 15 V.
3. OPERATING TEMPERATURE : -30°C TO +85°C.

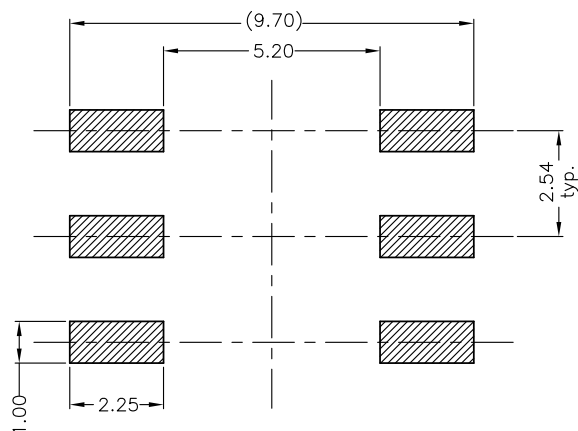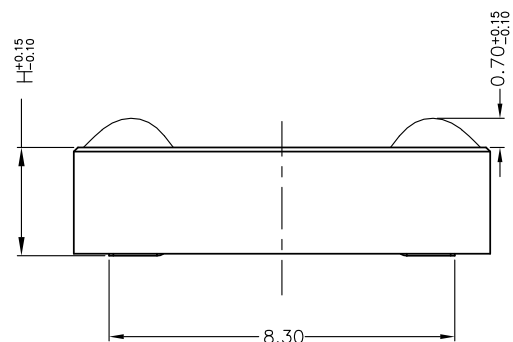

RECOMMEND P.C.B LAYOUT
TOLERANCE ±0.05
TOP VIEW

3.0mm	SCX-W0730X-06	2.2mm	SCX-W0722X-06
2.8mm	SCX-W0728X-06	2.0mm	SCX-W0720X-06
2.6mm	SCX-W0726X-06	1.8mm	SCX-W0718X-06
2.4mm	SCX-W0724X-06	1.6mm	SCX-W0716X-06
DIM "H"	PART NUMBER	DIM "H"	PART NUMBER

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

SCX-W07xxX-06-LF

SERIES

LEADFREE

06WAY

NON POST

90°SMT

16:HIGH 1.6mm

PAD TO PAD 7.45mm 30:HIGH 3.0mm

DESCRIPTION: SIM CARD 6P SMT TYPE