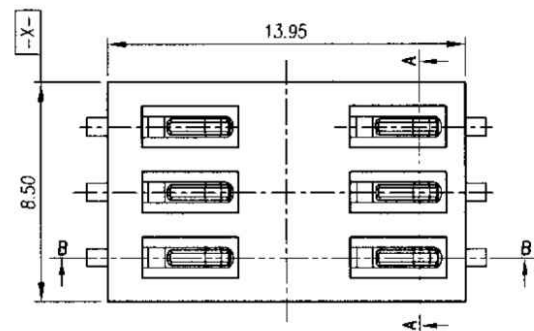
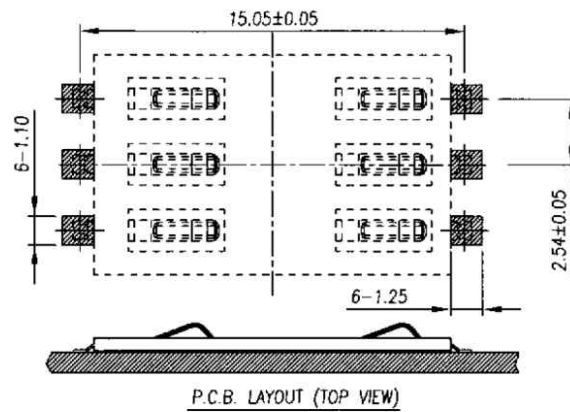
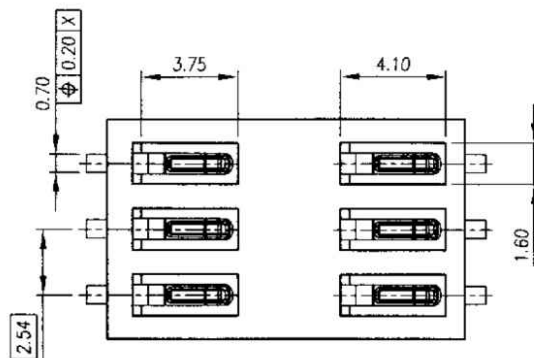


NOTES:

- 1) Material :
Housing : Thermoplastic UL94V-0
Contact : BERYLLIUM C17200R-H,T=0.10mm.
- 2) Plating :
Contact Plating - Gold over 45u" MIN.Nickel
Solder Tail Plating - Gold Flash over 45u" MIN.Nickel
- 3) Contact Forces :
Max. 0.5 N For 0.5mm Contact Deflection.
Min. 0.25 N For 0.5mm Contact Deflection.
- 4) Specification :
Withstanding Voltage:500V AC initial and 250 V AC final at sea level for 1 Minute
Insulation Resistance:1000M Ohms
Voltage Rating:5 Volts Max
Current Rating:10mA Max
Contact Resistance:30m Ohms Max
Operating Temperature:-40°C~+85°C
Insertion Cycles:20,000 Times
- 5) Application:
For SIM Card Use Only

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

SCX-W1505X-06-LF
SERIES | | | LEADFREE
| | | 06WAY
| | | NON POST
90°SMT | | 0.5mm HIGH
| | | PAD TO PAD 15.05mm

DESCRIPTION: