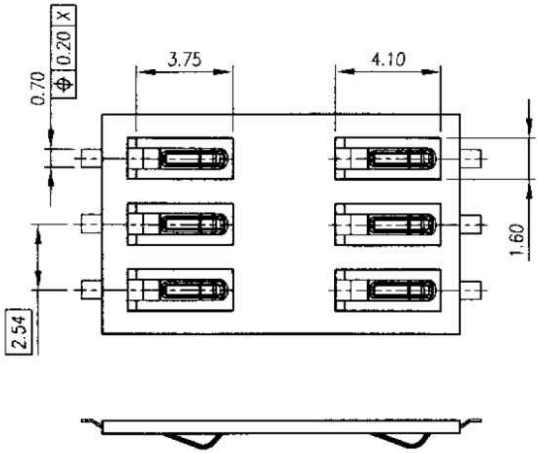

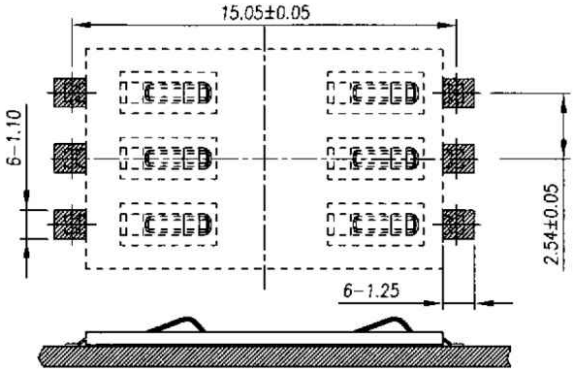

P.C.B. LAYOUT (TOP VIEW)

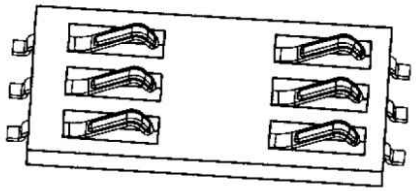

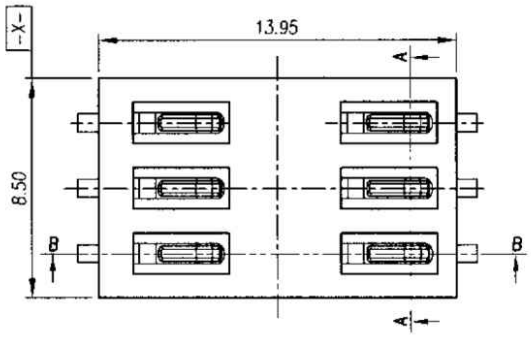



SECTION A-A



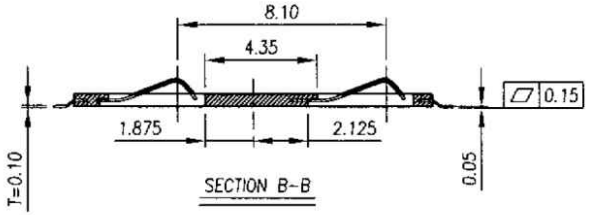

SECTION B-B

NOTES:

1) Material :
   - Housing : Thermoplastic UL94V-0
   - Contact : BERYLLIUM C17200R-H,T=0.10mm.
2) Plating :
   - Contact Plating – Gold over 45u" MIN.Nickel
   - Solder Tail Plating – Gold Flash over 45u" MIN.Nickel
3) Contact Forces :
   - Max. 0.5 N For 0.5mm Contact Deflection.
   - Min. 0.25 N For 0.5mm Contact Deflection.
4) Specification :
   - Withstanding Voltage:500V AC initial and 250 V AC final at sea level for 1 Minute
   - Insulation Resistance:1000M Ohms
   - Voltage Rating:5 Volts Max
   - Current Rating:10mA Max
   - Contact Resistance:30m Ohms Max
   - Operting Temperature:-40°C~+85°C
   - Insertion Cycles:20,000 Times
5) Application:
   - For SIM Card Use Only

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
		.XX ±
DATE		.XXX ±
		ANG ±
SIZE A4	PPOJECTION	



ORDER INFORMATION

SCX-W1505X-06-LF

- SERIES
- 90°SMT
- 0.5mm HIGH
- PAD TO PAD 15.05mm
- NON POST
- 06WAY
- LEADFREE

DESCRIPTION: