

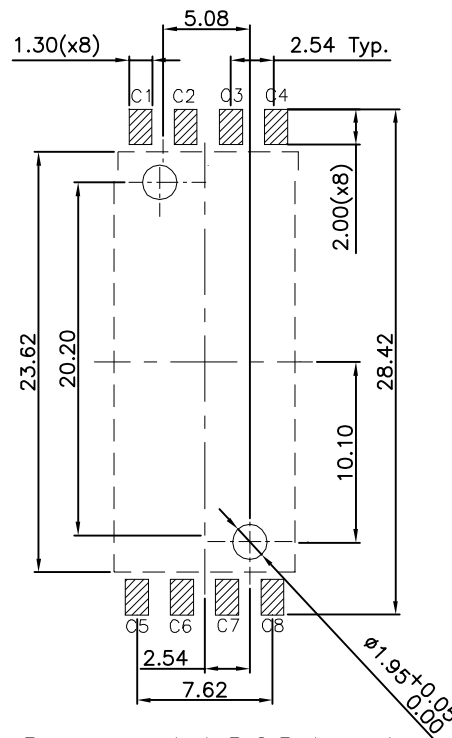


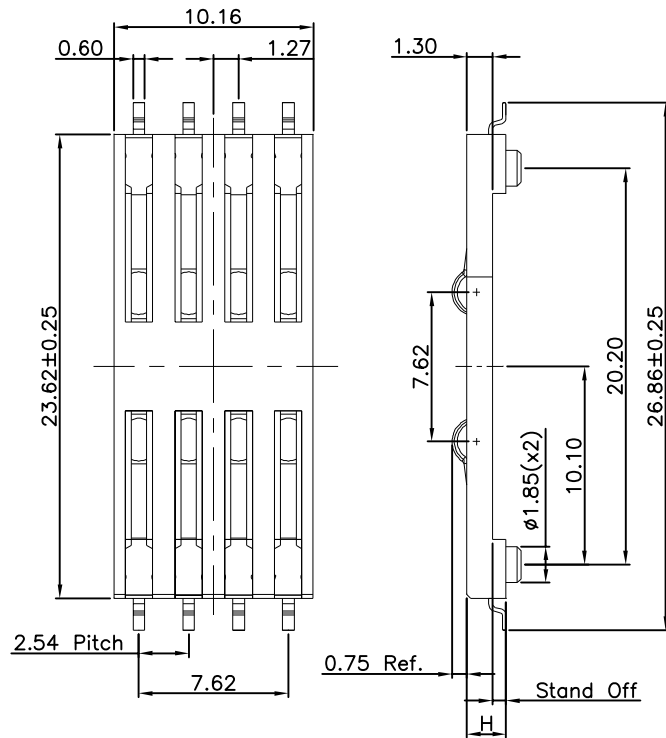

Recommended P.C.B Layout
Component Side (Tolerance: ± 0.05)



Stand Off	H
13	1.30
15	1.55
20	2.00

1. Materials

Housing: Hi-Temp. LCP, UL 94V-0, Black

Terminal: Phosphor Bronze, Gold Plated

2. Specification

Current Rating: 0.5 AMP Max

Dielectric Withstanding: 500 V AC For One Minute

Contact Resistance: 30m oHms Max

Insulation Resistance: 1000M OHMS MIN At DC 500V

Operation Temperature: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.25
.XXX $\pm$ 0.15
ANG $\pm$ 2°

照片框

ORDER INFORMATION

SCX-W26xxP-08-LF

SERIES

POST

LEADFREE

08WAY

90°SMT

PAD TO PAD 26.86mm

13:1.3mm

15:1.55mm

20:2.0mm

DESCRIPTION: SIM CARD, 8 PIN, PCB MOUNT, SMT, FEMALE, H: 1.3/1.55/2.00 mm, With Post