

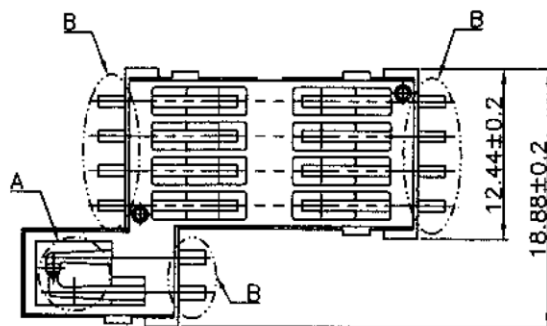

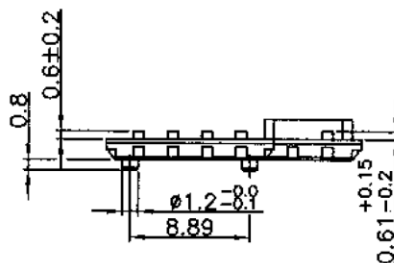
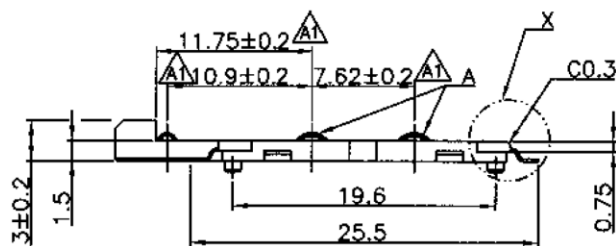


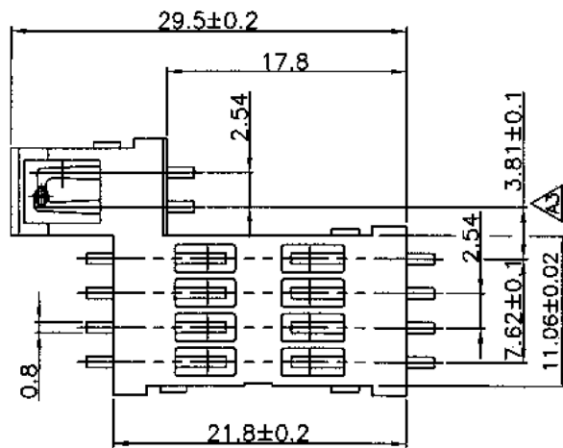

Material and Finish:

1. Insulator material: Nylon-9T, UL94V-0, Color: Black
2. Contact Material: Phosphor Bronze
3. Contact Plated: A: Gold Plated (See to PART NO.)
B: Tin Plated
4. Switch Terminal Material: Phosphor Bronze
5. Switch Terminal Plated: A: 15u" Gold Plated
B: Tin Plated
6. Contact Rating: 0.5 Amp Max.
7. Contact Resistance: 100m ohms Max.
8. Insulation Resistance: 1000M ohms Min.
9. Dielectric Withstanding Voltage: 500V AC
10. Operating Temperature: -40°C to +90°C
11. Card Detection Switch (NORMAL OPEN)

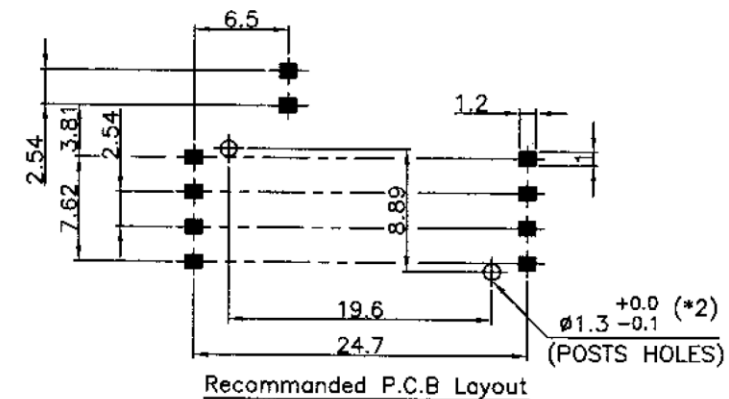

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
X, ± 0.30
.XX, ± 0.20
.XXX, ±
ANG, ±



ORDER INFORMATION

SCZ-W2415PB-08-LF
SERIES | | | | LEADFREE
90°SMT | | | | 08WAY
| | | | OPEN SWITCH
| | | | POST
| | | | BODY HIGH 1.5mm
| | | | PAD TO PAD 24.6mm

DESCRIPTION: