
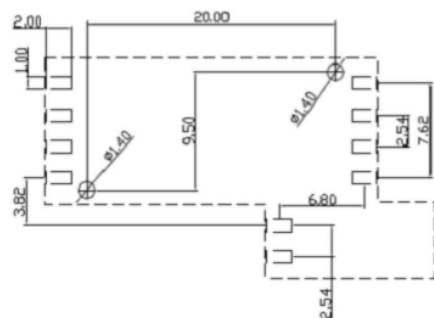
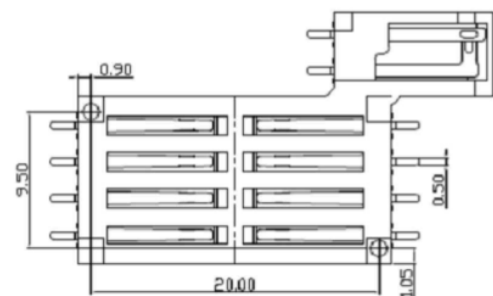

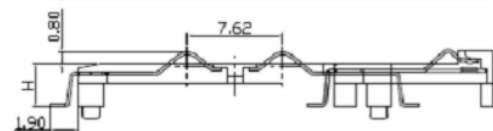


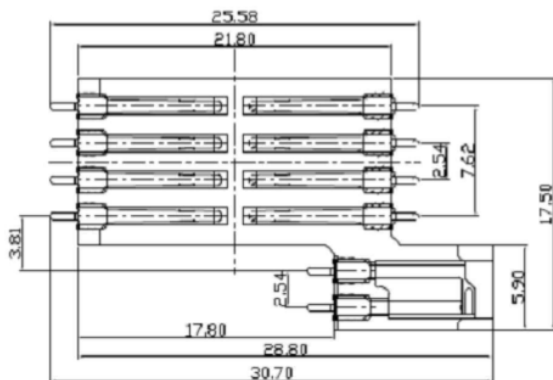

Notes:

Material: Phosphor Brozne

SIMM Card Connector,With

Physical:

Housing: LCP UL 94V-0

Contact: Selective Gold Flash

Specifications:

Voltage Current rating: 1A. 50V AC

Insulation Resistance: 1000Mohm Min

Contact Withstanding Voltage:

AC 500V For 1 Minute

Temperteure Rating: -40° To +85°

SCZ-W24xxPBR-08-LF

LEADFREE

H

20:2.0mm/BASE/HEIGHT

25:2.5mm/BASE/HEIGHT

30:3.0mm/BASE/HEIGHT

35:3.5mm/BASE/HEIGHT

42:4.2mm/BASE/HEIGHT

47:4.7mm/BASE/HEIGHT

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. SCZ-W24xxPBR-08

DWG NO. SCZ-W24xxPBR-08

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X. ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG

DESCRIPTION:

AREA


REVISIONS

DATE

煜倫股份有限公司

Carrier Dimensions Diagram

PULL OUT DIRECTION →

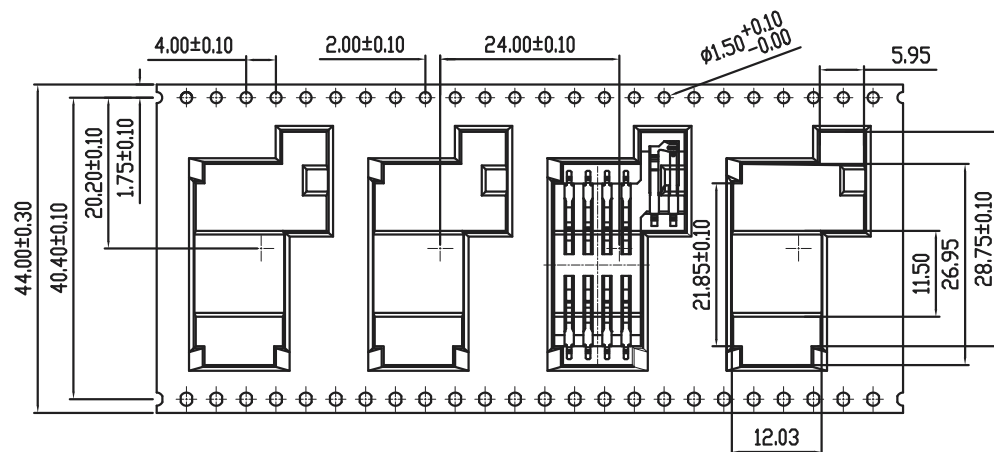

G.W.:1.20KGS



Q'ty:600 Pcs per Reel

G.W.:7.20KGS

Q'ty:4200 Pcs per carton(7 Reels set in order)

Meas:35.00L×35.00W×32.30H cm

Reel Form Diagram

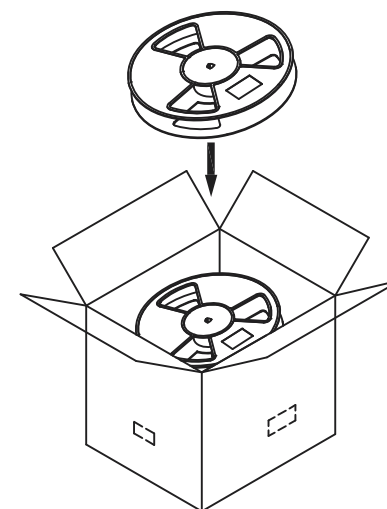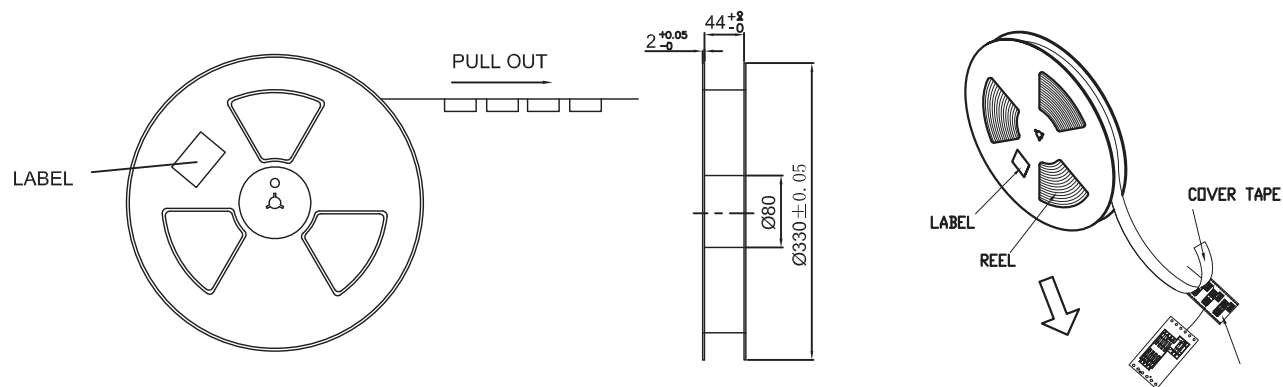

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. SCZ-W24xxPBR-08

DWG NO. SCZ-W24xxPBR-08

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG

DESCRIPTION:

AREA

REVISIONS

DATE

煜倫股份有限公司