
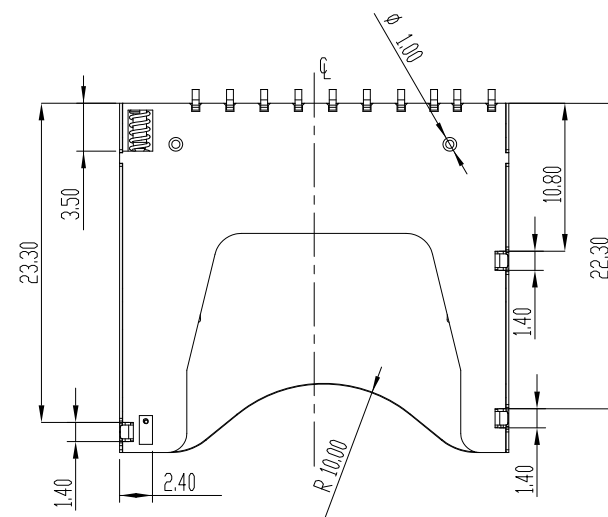
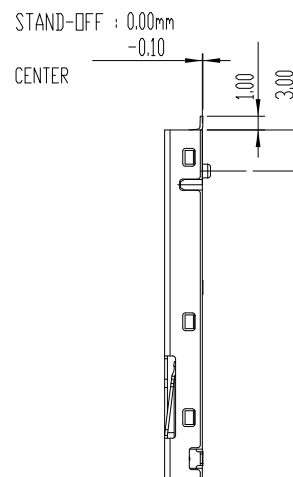


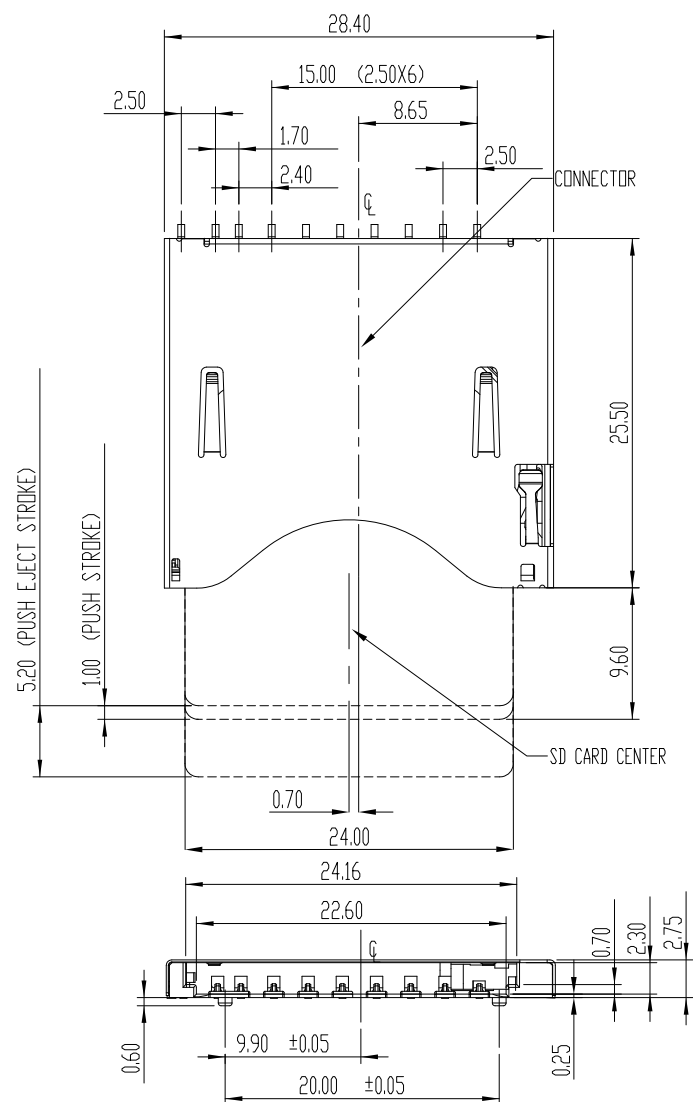

- NOTES :
- MATERIAL :
INSULATOR : HIGH TEMPERATURE THERMOPLASTIC , UL94V-0.
COLOR : BLACK
CONTACT : PHOSPHOR BRONZE.
 - PLATING :
CONTACT AREA : 10μ" Au PLATET OVER Ni
SOLDER AREA : Tin PLATET OVER Ni

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SDC-W20PB80-09-LF

SERIES

90°SMT

PUSH PUSH

POST TO POST 20.0mm


LEADFREE

09WAY


PAD 8.5±0.25

B TYPE

DESCRIPTION: SD CARD PUSH PUSH CONNECTOR

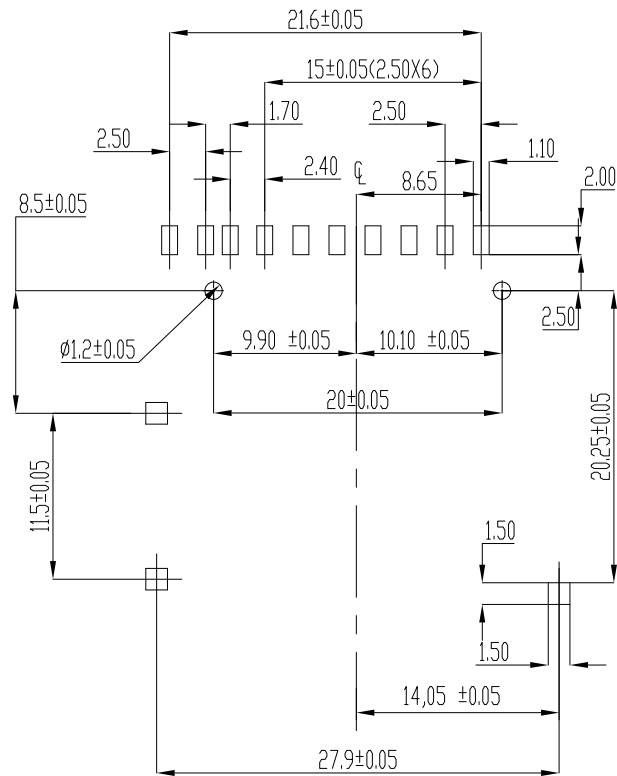


PCB LAYOUT
(ALL TOLERANCE ARE ±0.05)

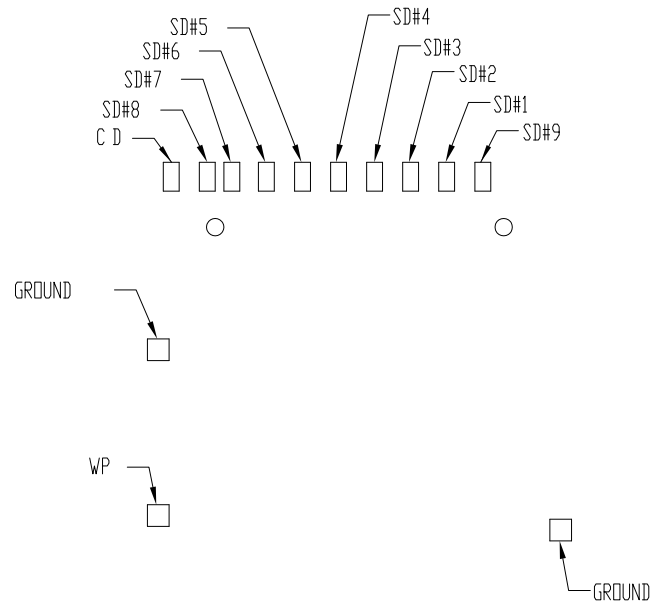

PIN NO.	PIN DEF.
SD#1	SD- DAT3
SD#2	CMD
SD#3	VSS
SD#4	VDD
SD#5	CLK
SD#6	VSS
SD#7	DAT0
SD#8	DAT1
SD#9	DAT2
SD#CD	SD- CD

SD CIRCUIT :

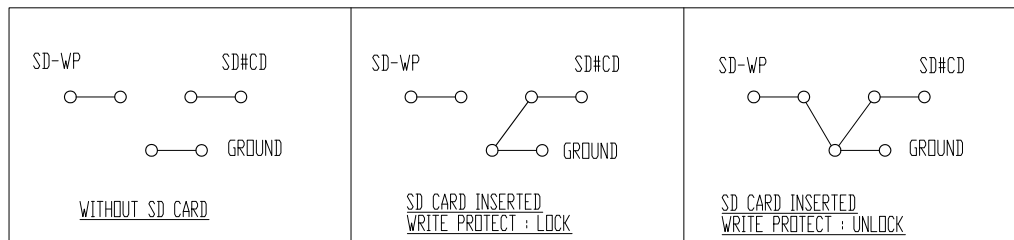

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SDC-W20PB80-09-LF

SERIES LEADFREE

09WAY PAD 8.5±0.25

B TYPE

PUSH PUSH

POST TO POST 20.0mm

DESCRIPTION: SD CARD PUSH PUSH CONNECTOR