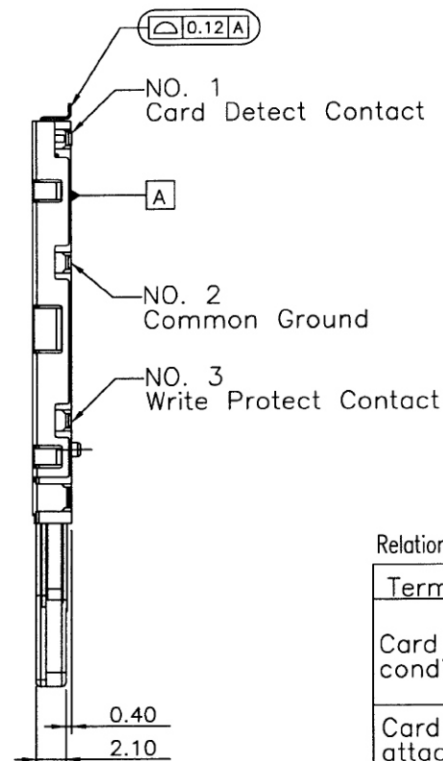
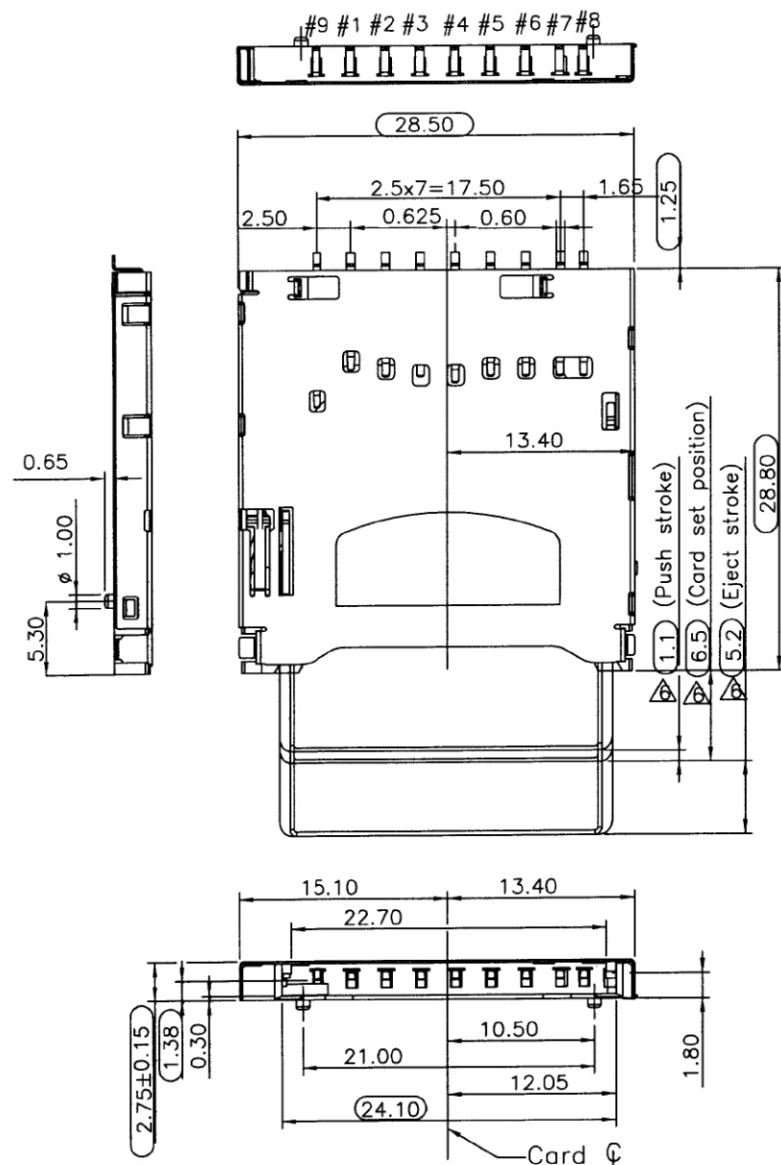


SPECIFICATION
MATERIAL
 Insulator: Thermal Plastic UL94V-0
 Contacts: Copper Alloy
 Shell: Stainless Steel
 Rivet, Boardlock: Copper
CONTACT PLATING
 Underplate: 50u"~100u" Nickel
 Contact Area: 1u"~30u" Selective Gold
 Solder Tails Area: 100u"~200u" Tin/Lead (Brighten Tin) or 100u"~200u" Tin/Lead Free (Brighten Tin/Matte Tin)
ELECTRICAL
 Operation Voltage: 3.3 V
 Current Rating: 0.5 Amps Max.
 Contact Resistance: 40 mohms Initial
 Insulation Resistance: 1000 Mohms Min @ 500 VDC
 Dielectric Withstanding Voltage: 250 VAC / minute
 Temperature Range: -20°C to +85°C
 Mating Cycles: 10,000 Insertions(In Office)

Relation of detection switches codition

Terminal Number	①—②		②—③	
	Card detect switch		Write protect switch	
Card attachment condition			Write enable	Write unable
Card not attached	Closed		Closed	Closed
Card attached	Open		Open	Closed

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

SDC-W21PA32-09-LF
 SERIES | | | LEADFREE
 | | | 09 WAY
 | | | PAD 3+2
 | | | UPPER CONTACT
 | | | PUSH PUSH
 90°SMT | | POST 21.0mm

DESCRIPTION: