

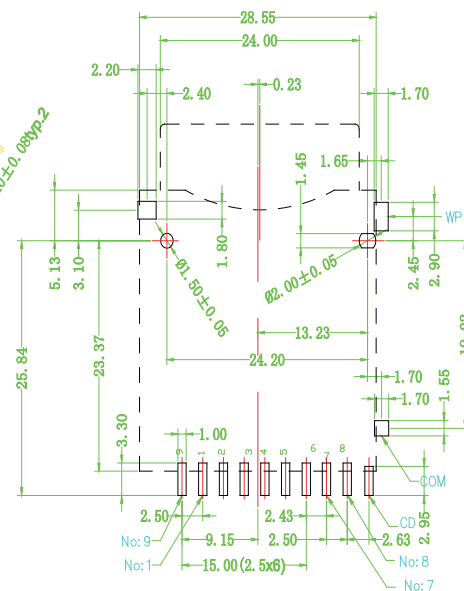
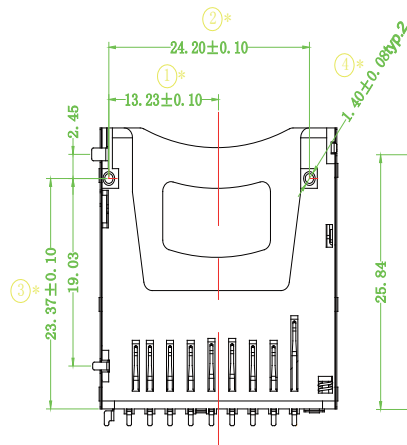



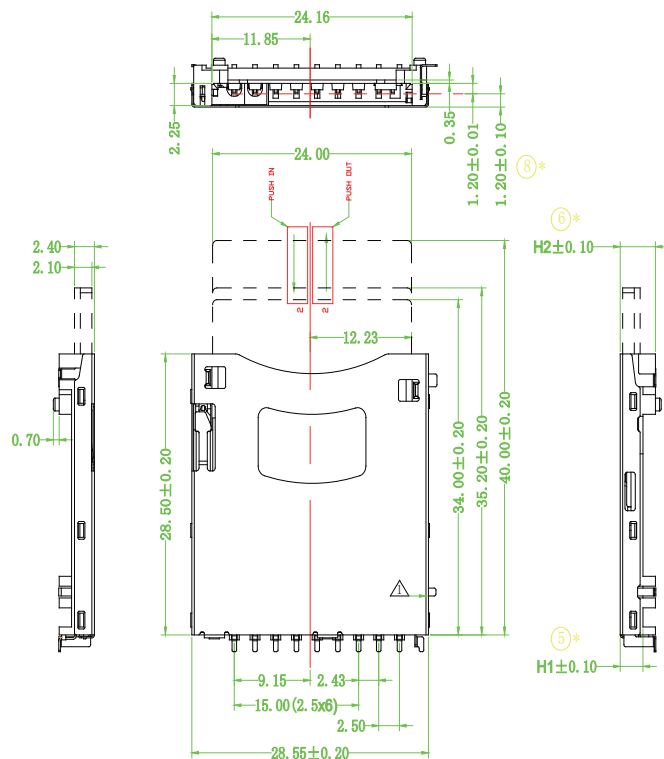


Recommended P.C.Board Layout

CIRCUIT without CARD




CARD INSERTED



- Write Protect SW:Lock
- Status: Read only

CARD INSERTED



- Write Protect SW:Unlock
- Status: Write enable

SD Card Connector,
Standard,Push-Push,Type F1,
Shielded
Physical:

Housing: LCP, UL 94V-0

Contact: Phosphor Bronze

Specifications:

Current Rating: 1A.

Insulation Resistance: 1000M ohm min

Contact Resistance: 100m ohm max

Dielectric Withstanding Voltage:

AC 500V For 1 Minute

Temperature Rating: -40°C To +85°C

IR Reflow Soldering Temperature:

Lead Part:220°C,5 Sec

RoHs Part:260°C,5 Sec

REV.	DATE	APPD.	CHR.	DR.
1.0	2007/03/10	NAOMI	MICHAEL	LILY
1.3	2010/04/01	BING	DANIEL	LILY
1.4	2010/07/05	BING	DANIEL	DEFEND

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SDC-W24PB20Bxx-09-LF

SERIES 90°SMT POST TO POST 24.0mm PUSH PUSH B TYPE EAR/POST 2.45mm

00:0.0mm STANDOFF LEADFREE
15:1.5mm STANDOFF 09WAY
18:1.8mm STANDOFF
20:2.0mm STANDOFF

DESCRIPTION: SD CARD

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com