

Notes:

- Material :
 Housing: Thermoplastic UL 94V-0 ,Black
 Ejector: Thermoplastic UL 94V-0 ,Black
 Terminal: Copper Alloy
 Switch Pin: Copper Alloy
 Lock Pin: Stainless Steel
 Shell: Stainless Steel
 Spring: SWP
 Bar: Stainless Steel
- Finish :
 Terminal: Selected Gold on Contact Area
 Switch Pin: Gold Flash Overall
 Shell: Gold Flash on Solder Tail
 Spring: 100u" Min. Ni Overall

SDC-W24PB4A1-09-LF

LEADFREE


RoHS Compliant

Notes:

- Contact and Switch Coplanarity to be 0.12mm Max.
- Opening/Close of Each Switch:

	Protect Contact		Detect Contact
	Write Protect Position	Write Enable Position	
Card Uninsertion	Open	Open	Open
Card Insertion	Close	Close	Open
Card In The Lock Position	Open	Close	Close

- When The Card Is In The Lock Position , It Can't Be Pulled Out Of The Connector
- This Connector just for SD Memory Card Only

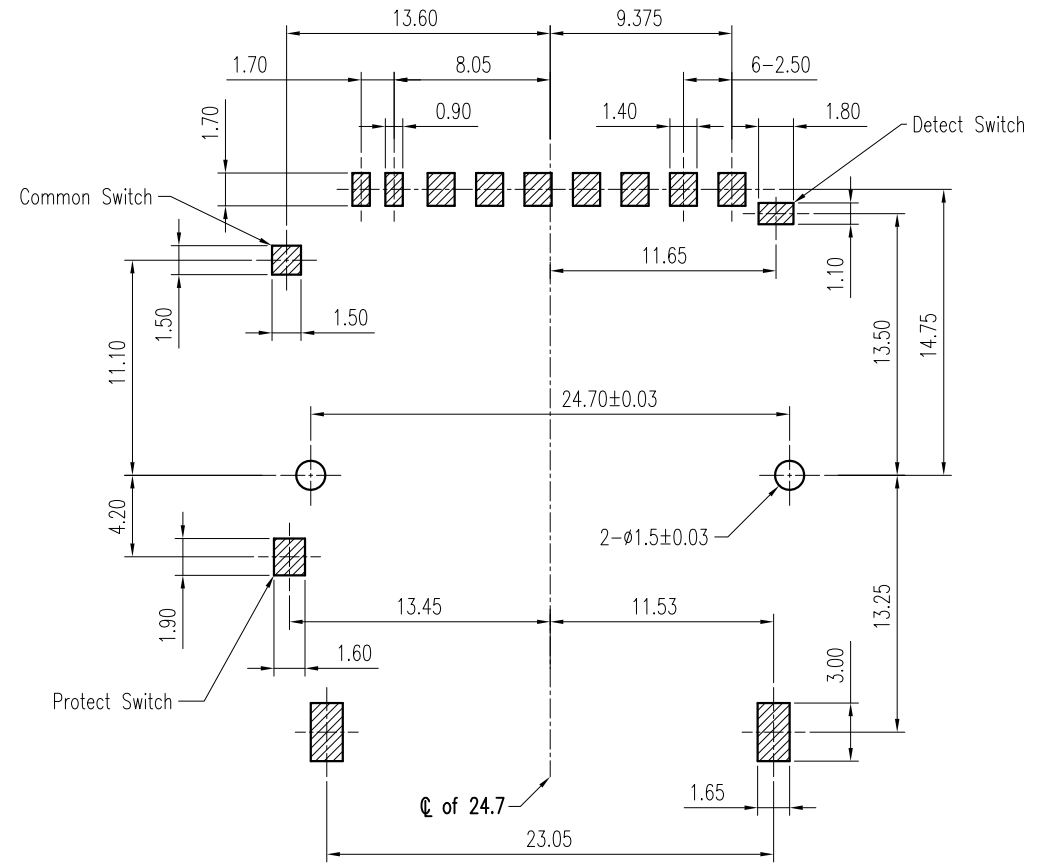

Recommended P.C.B. Layout
 Layout Tolerance = ± 0.05 mm



PART NO. SDC-W24PB4A1-09

DWG NO. SDC-W24PB4A1-09

CHECKED BY CY

TOLERANCES ARE

DESCRIPTION:

S.D Memory Card Conn.
 Push-Push Nor. Type

煜倫股份有限公司

FILE NO.

DRAWING BY

.X ± 0.2
 .XX ± 0.1
 .XXX ±
 AWG

AREA

REVISIONS

HK

DATE

UNIT / mm

SCALE 1:1

PROJECTION

