


**SPECIFICATION**


- 1.Material:  
 Insulator: LCP, rated UL94V-0,color:black.  
 Contacts; Phosphor Bronze,  
 Tin 160u" at Solder Tail,  
 Selected Gold on Contact Area Plating.  
 Shell:
- 2.Electrical Characteristics:  
 Operating voltage : 250V(AC/DC).  
 Current rating : 0.5 A.  
 Operating Temperature: -20°C~+65°C.  
 Insulation resistance: 1000M ohms min. at 250VDC  
 Dielectric withstanding voltage:500 VAC/1minute.  
 Contact resistance: 100m ohms max.  
 Mating cycle: 10000 cycles, spring is not breaking.

SDC-W24PBB018-09-LF  
 LEADFREE  
 RoHS Compliant

PIN NO.	DESCRIPTION
P1	DAT 3
P2	CMD
P3	VSS
P4	VDD
P5	CLK
P6	VSS2
P7	DAT 0
P8	DAT 1
P9	DAT 2

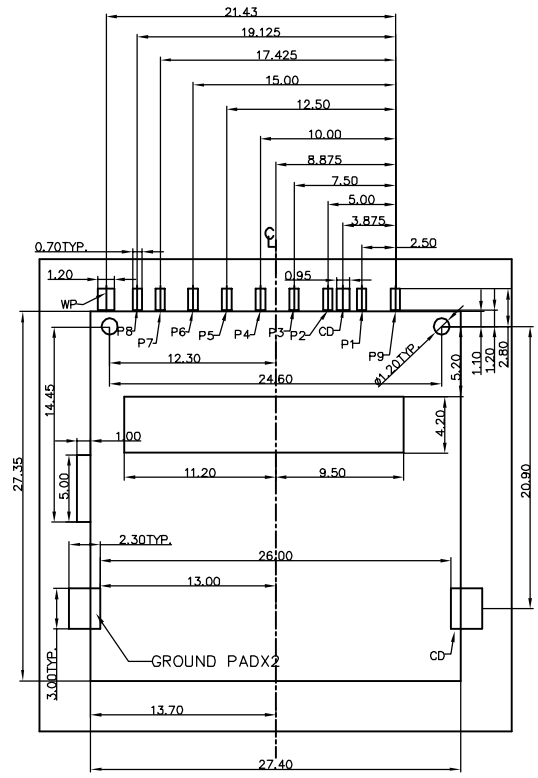

RECOMMENDED PCB LAYOUT  
 (ALL TOLERANCE ARE ±0.05)

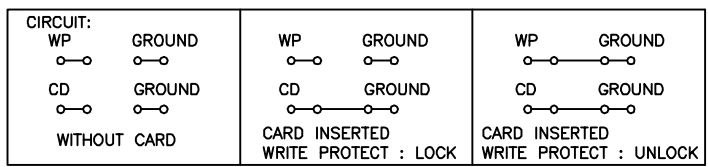

PART NO. SDC-W24PBB018-09

DWG NO. SDC-W24PBB018-09

CHECKED BY CY

TOLERANCES ARE

FILE NO.

DRAWING BY

.X ± 0.2  
 .XX ± 0.1  
 .XXX ±  
 AWG

DESCRIP TION:

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

AREA

REVISIONS

HK

DATE