
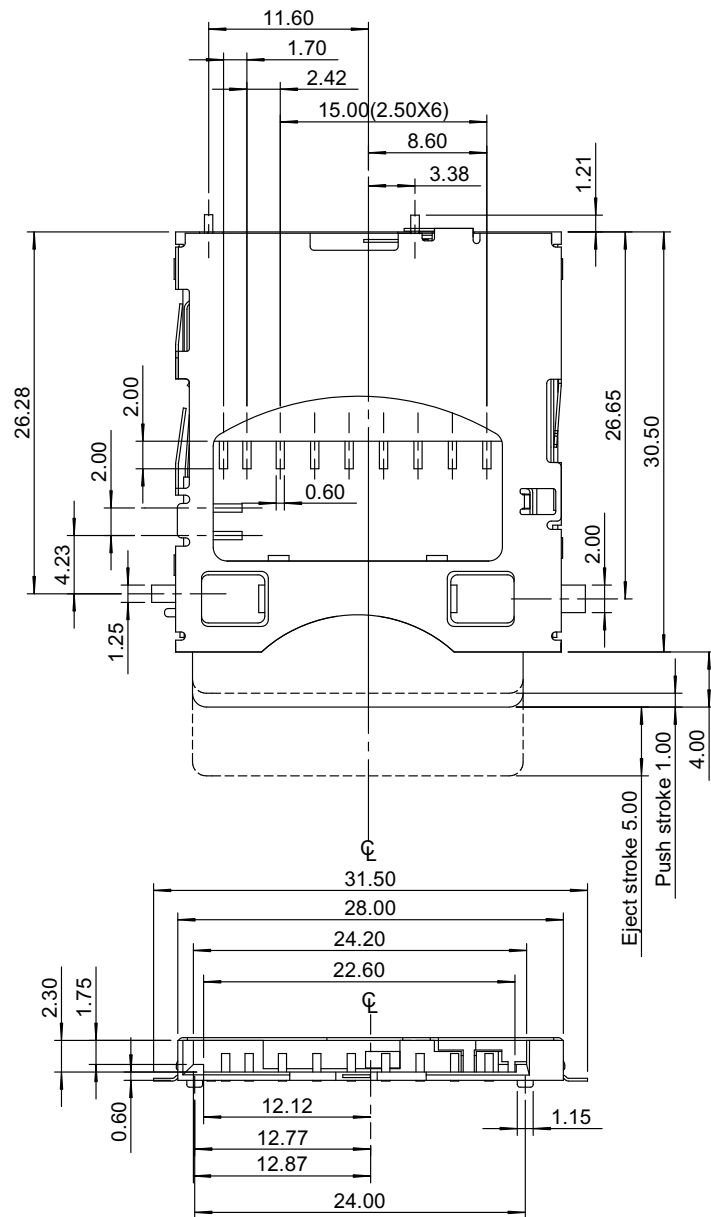


- NOTESK
- 1.MATERIALK
INSULATORHIGH TEMPERATURE THERMOPLASTIC
UL94V-0. COLORBLACK
CONTACTKPHOSPHOR BRONZE
COVERKPHOSPHOR BRONZE
 - 2.PLATING :
CONTACT AREA : 10u" GOLD OVER 50u" NICKEL
SOLDER TAIL : 100u" TIN OVER 50u" NICKEL

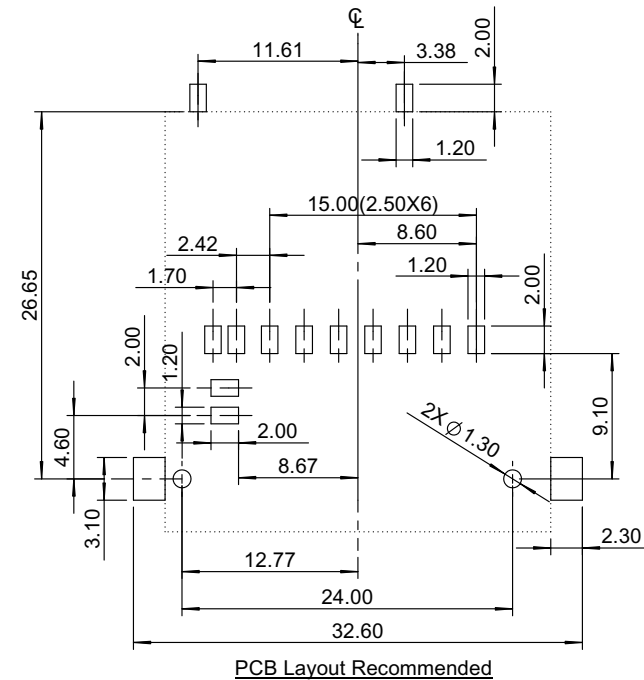

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION


SDC-W24PC-09-LF
SERIES
LEADFREE
09WAY
C TYPE
PUSH PUSH
POST TO POST 24.0mm
90°SMT

DESCRIPTION: SD Card Connector Push Push J Type

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com



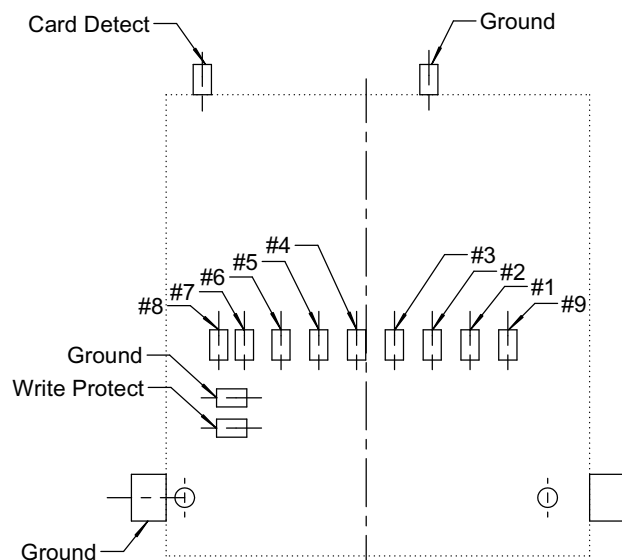


RECOMMENDED P.C.B. LAYOUT

Pin Assignment

PIN NO.	NAME
# 1	DAT3
# 2	CMD
# 3	GND
# 4	VCC
# 5	CLK
# 6	GND
# 7	DAT0
# 8	DAT1
# 9	DAT2

CIRCUIT K



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SDC-W24PC-09-LF
SERIES
LEADFREE
09WAY
C TYPE
PUSH PUSH
POST TO POST 24.0mm
90°SMT

DESCRIPTION: SD Card Connector Push Push J Type