



WITHOUT CARD



CARD INSERTED
WRITE PROTECT : LOCK



CARD INSERTED
WRITE PROTECT : UNLOCK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20


DATE

.XXX ± 0.05

ANG ±

SIZE A4

PJECTION




ORDER INFORMATION

SDC-W24PC21-09-LF
SERIES | | | | LEADFREE
| | | | 09WAY
| | | | EAR/POST 2.1mm
| | | | C TYPE
90°SMT | | | | PUSH PUSH
| | | | POST TO POST 24.0mm

煜倫股份有限公司

www.morethanall.com

DESCRIPTION:

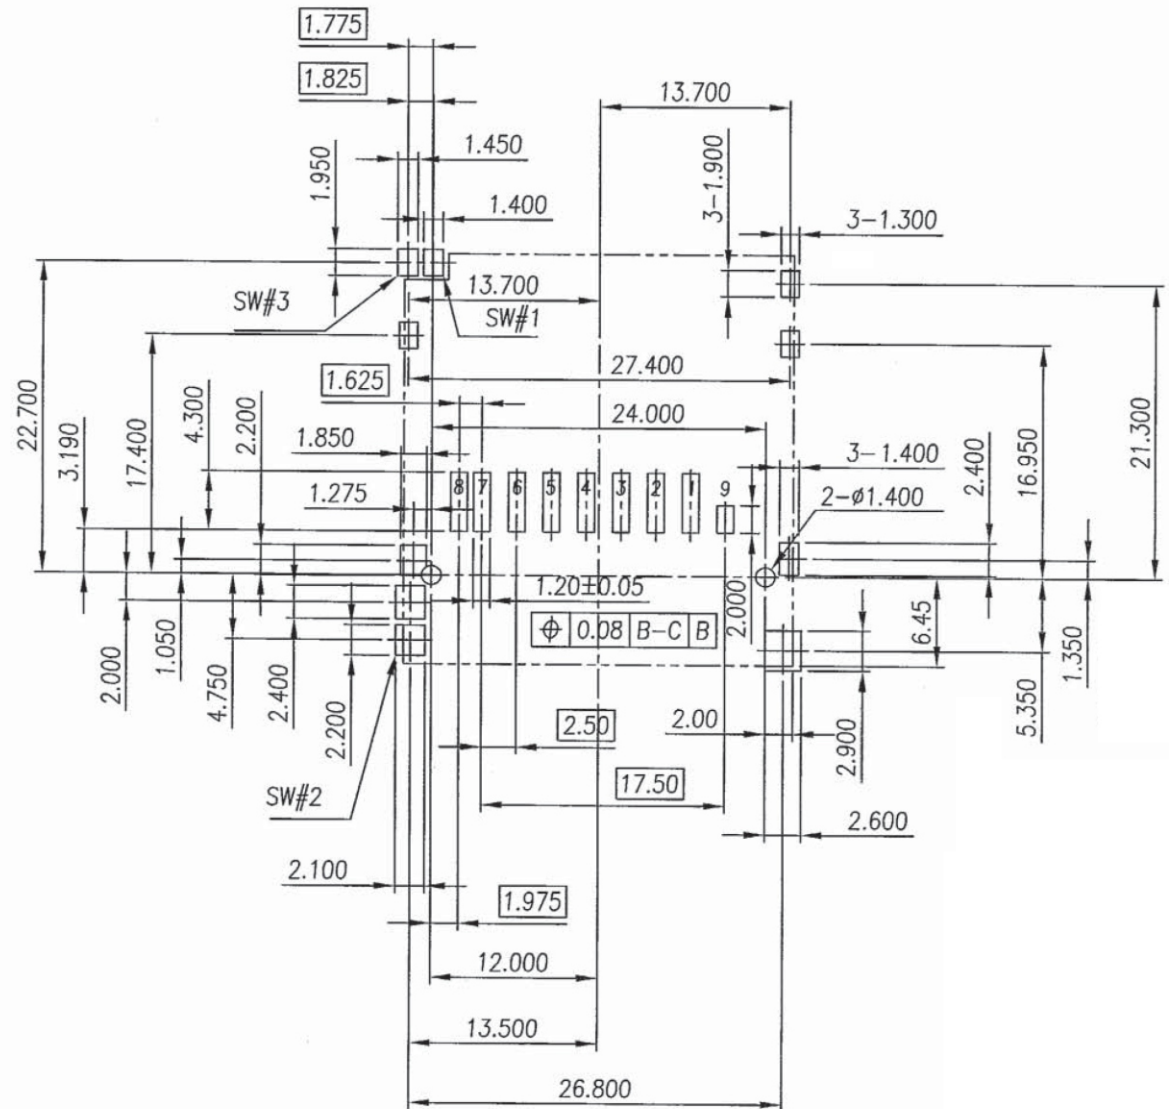

SD CARD PIN ASSIGN	
PIN	NAME
1	CD/DAT3
2	CMD/DI
3	VSS1
4	VDD
5	CLK/SCLK
6	VSS2
7	DAT0
8	DAT1
9	DAT2

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 X ± 0.30
 XX ± 0.20
 .XXX ± 0.05
 ANG ±

PJECTION



ORDER INFORMATION

SDC-W24PC21-09-LF
 SERIES | | | | LEADFREE
 | | | | 09WAY
 | | | | EAR/POST 2.1mm
 | | | | C TYPE
 90°SMT | | | | PUSH PUSH
 | | | | POST TO POST 24.0mm

DESCRIPTION: