


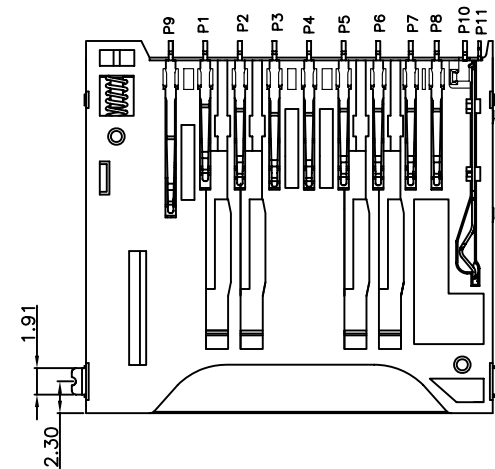


www.morethanall.com

PPOJECTION

照片框

90°SMT | MYLAR
POST TO POST 25.0mm | EAR/POST 1.2mm
B TYPE
PUSH PUSH

DESCRIPTION: SD Top Mount Push/Push

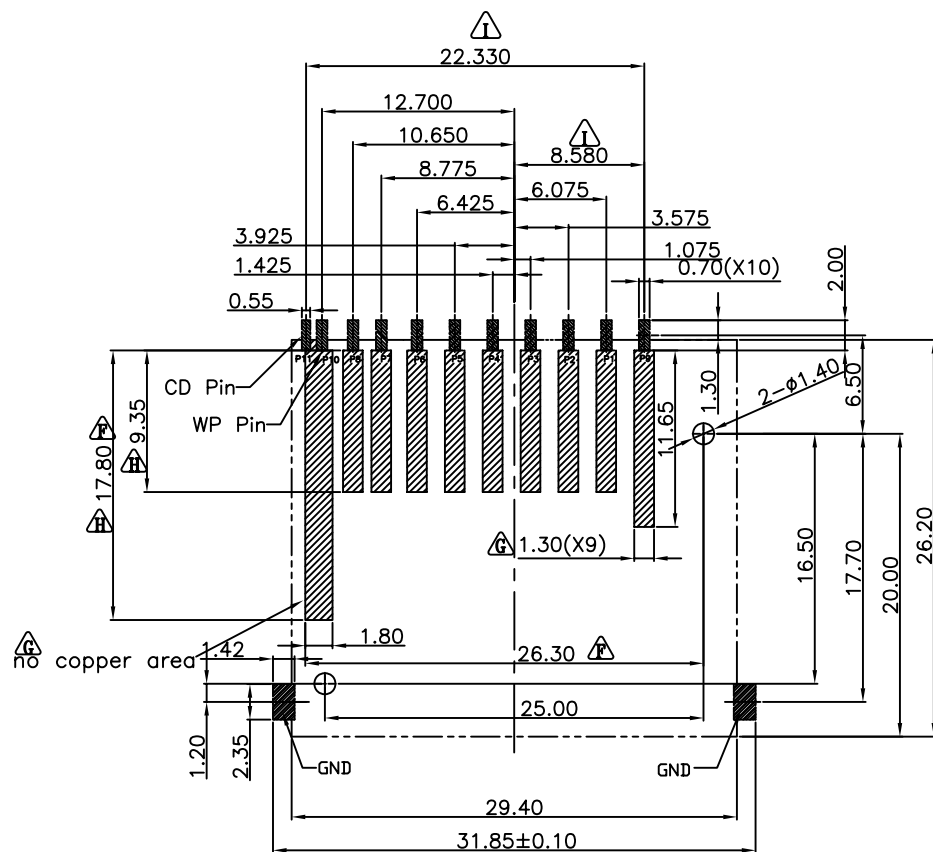

RECOMMENDED P.C.B LAYOUT
(General tolerance ± 0.05)

PAD AREA

There should not be any circuitries in the layout space of the products.

Pin Assignment

Pin No.	NAME
1	DAT3
2	CMD
3	Vss1
4	Vdd
5	CLK
6	Vss2
7	DAT0
8	DAT1
9	DAT2
10	WP
11	CD

Specification

*Electrical Characteristics:

Contact Current Rating: 0.5Amperes.
Dielectric Withstanding Voltage: AC500V r.m.s.
Insulation Resistance: 1000 Megohms
Minimum At DC 500V.
Contact Resistance: 100 milliohms Maximum.

*Mechanical Characteristics:

Mating Cycles: 10,000 Cycles.

*Environmental:

Operating Temperature: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$.

*Materials:

Insulator: HI-Temp plastic UL 94V-0 Rated.
Contact: Copper Alloy ($t=0.20\text{mm}$).
Pad: Copper Alloy. Pad ($t=0.20\text{mm}$).

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X ± 0.30

.X ± 0.38

.XX ± 0.25

.XXX ± 0.10

ANG $\pm 3^{\circ}$

PPOJECTION

照片框

ORDER INFORMATION

SDC-W25PB10CR-09-LF

SERIES

90°SMT

POST TO POST 25.0mm

B TYPE

PUSH PUSH

REEL



MYLAR

EAR/POST 1.2mm

09WAY

LEADFREE

DESCRIPTION: SD Top Mount Push/Push

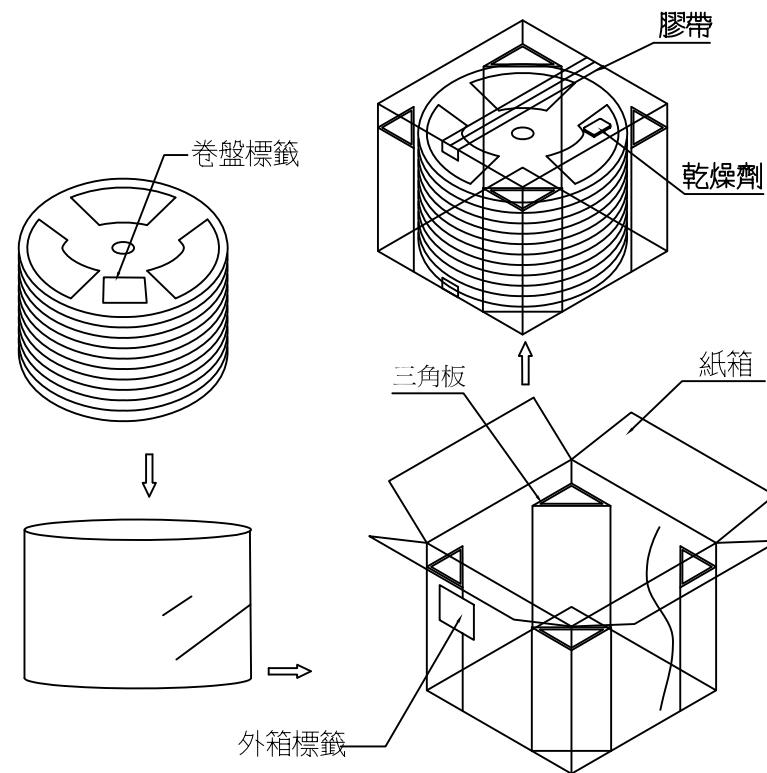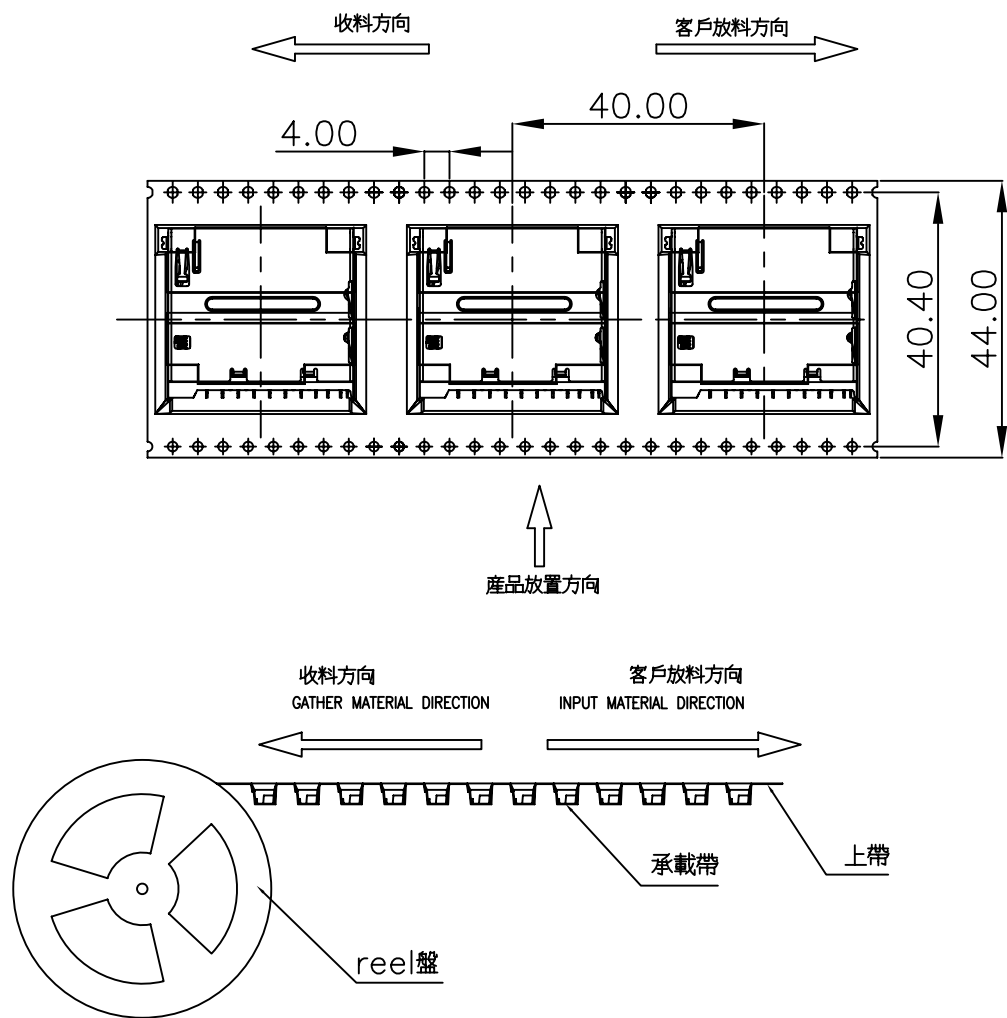

PACKING INFORMATION

PART NAME	
QUANTITY OF PER REEL	250PCS/REEL
QUANTITY OF PER CARTON	6*250=1500PCS/CARTON

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SDC-W25PB10CR-09-LF

SERIES

90°SMT

POST TO POST 25.0mm

REEL

MYLAR

B TYPE

PUSH PUSH

09WAY

EAR/POST 1.2mm

LEADFREE

DESCRIPTION: SD Top Mount Push/Push