
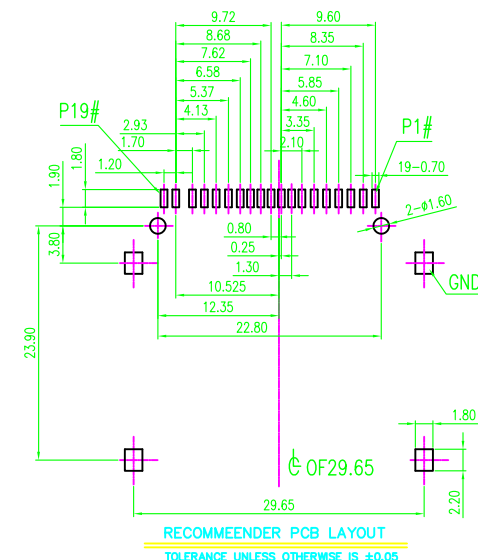
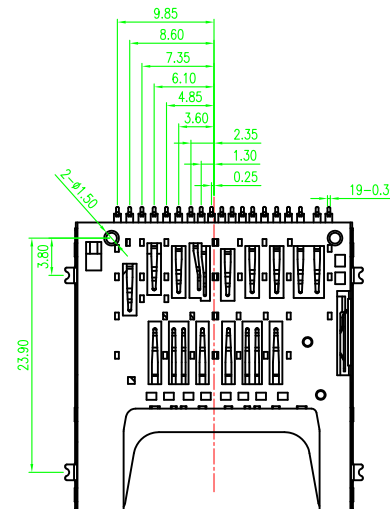


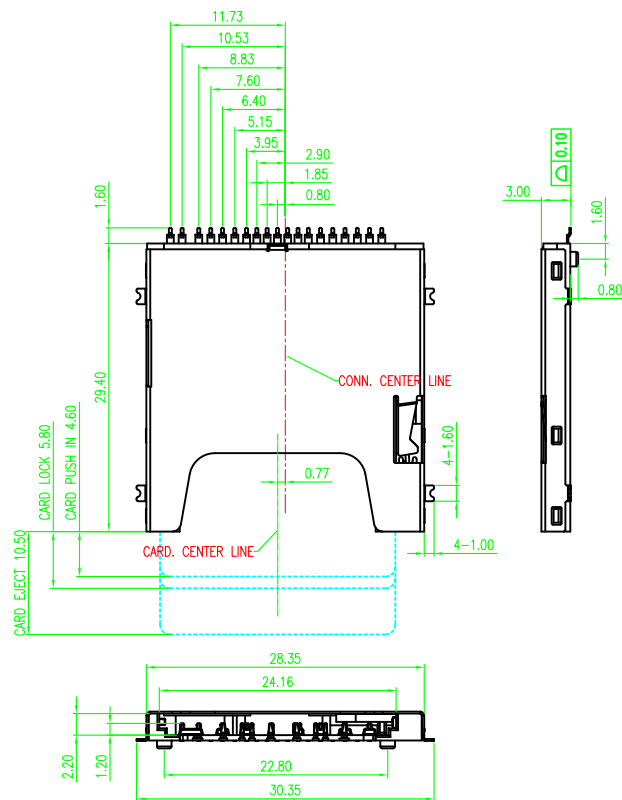

CARD DETECT	7#	CARD OUT	8#	7#	CARD INSERT	8#
WRITE PROTECT	19#	WRITE PROTECTED	GND	19#	WRITE ENABLE	GND#

PIN DEFINE:

PIN#	NAME	DESCRIPTION	PIN#	NAME	DESCRIPTION
1	VSS3	GROUND	11	VDD1	SUPPLY VOLTAGE
2	DAT2	DATA LINE BIT2	12	D1-	DIFFERENTIAL DATE 1-
3	D0+	DIFFERENTIAL DATE 0+	13	CLK	CLOCK
4	CD/DAT3	CARD DETECT/DATA LINE BIT3	14	D1+	DIFFERENTIAL DATE 1+
5	D0-	DIFFERENTIAL DATE 0-	15	VSS2	SUPPLY VOLTAGE GROUND
6	CMD	COMMAND/RESPONSE	16	VSS5	GROUND
7	CD	CARD DETECT	17	DAT0	DATA LINE BIT0
8	VSS1	SUPPLY VOLTAGE GROUND	18	DAT1	DATA LINE BIT1
9	VSS4	GROUND	19	WP	WRITE PROTECT
10	VDD2	SUPPLY VOLTAGE (1.8V)			

SPECIFICATION

1.Material:

Insulator: LCP, 無鹵 UL94V-0,color:black.
 Contacts: Phosphor Bronze,
 Tin 80u MIN at Solder Tail,
 Selected Gold on Contact Area Plating.
 Shell: Stainless.
 Gold at Solder Tail,
 Over Nickel Plating.

2.Electrical Characteristics:

Operating voltage : 500V(AC/DC).
 Current rating : 1.0 A.
 Operating Temperature: -25°C~+85°C.
 Insulation resistance: 1000M ohms min. at 250VDC
 Dielectric withstanding voltage:500 VAC/1minute.
 Contact resistance: 100m ohms max.
 Mating cycle: 5000 cycles, spring is not breaking.

3.符合RoHS2.0 & REACH。

滿足24小時鹽霧試驗。
 IR REFLOW 260+/-5度C/10SECONDS.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

SDC-W22PB30-19-LF
 SERIES LEADFREE
 19WAY
 PAD 29.65
 B TYPE
 PUSH PUSH
 POST TO POST 22.8mm
 90°SMT

DESCRIPTION:SD4.0 Top, Push/Push Type,H 3.00mm