

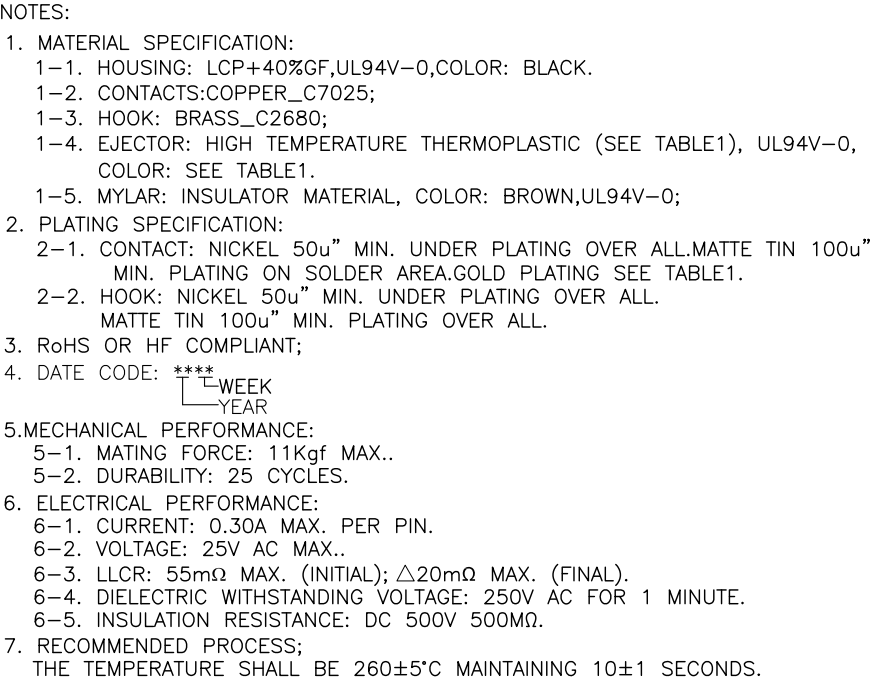


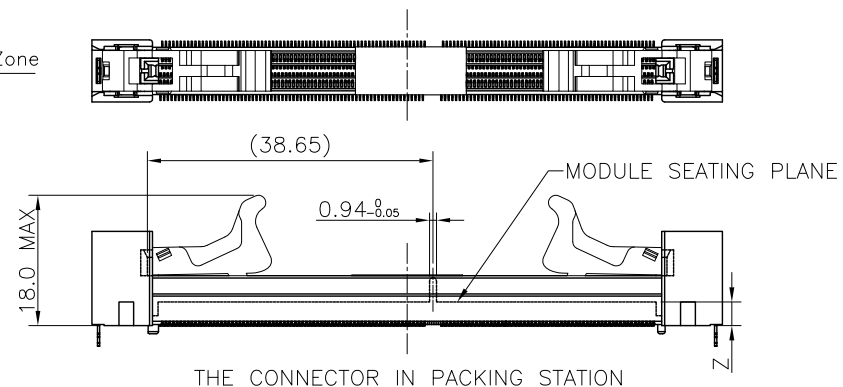


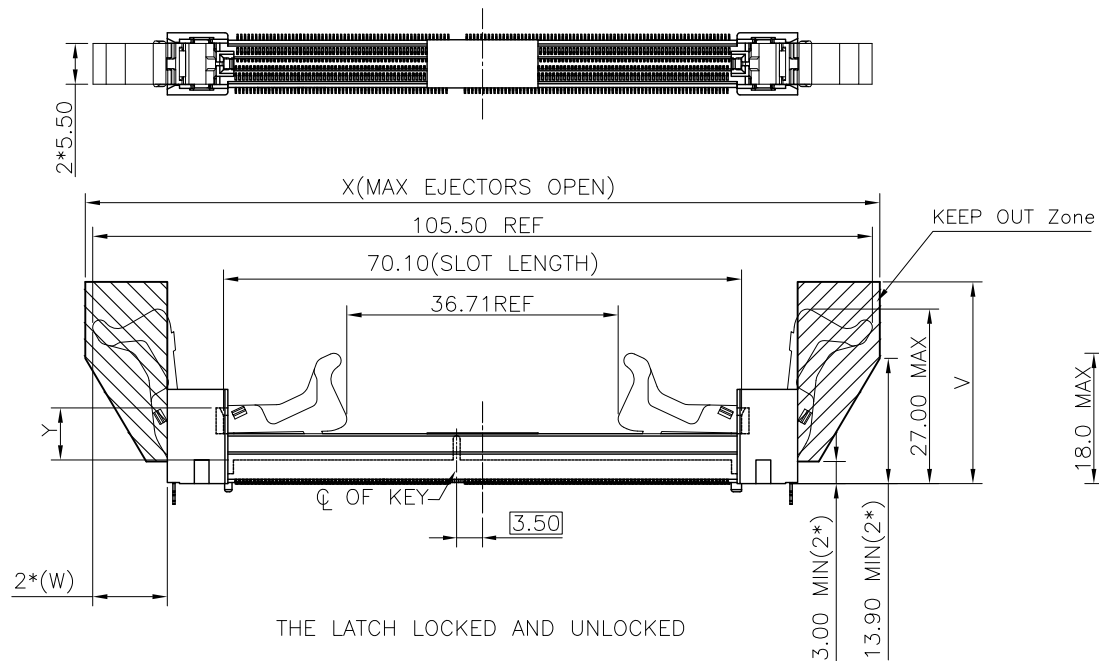

NOTES:

△ A MINIMUM HEIGHT OF Y MEASURED TO THE HIGHEST POINT OF THE SOCKET TO MODULE ENGAGEMENT IS REQUIRED TO PREVENT THE MEMORY MODULE TILTING RELATIVE TO DATUM B OF THE SOCKET.

△ DIMENSION IS FROM THE BOTTOM OF THE SOCKET PCB REFERENCE, DATUM A, TO THE SEATING PLANE OF THE SODDR4 DIMM IN THE SOCKET.

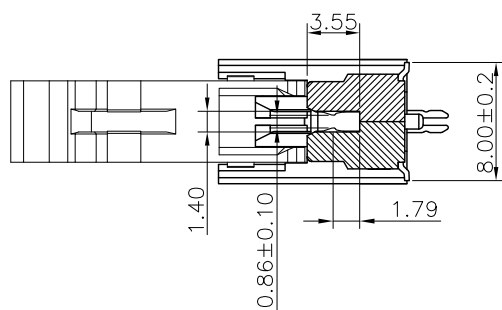

SECTION A-A
SCALE 2:1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ±

PPOJECTION


照片框

ORDER INFORMATION


SDM5-V84V12-144116-LF

SERIES | 12V | 144+116 WAY | LEADFREE
WIDTH 8.4mm
180°SMT

DESCRIPTION: VERTICAL SODDR4 CONNECTOR

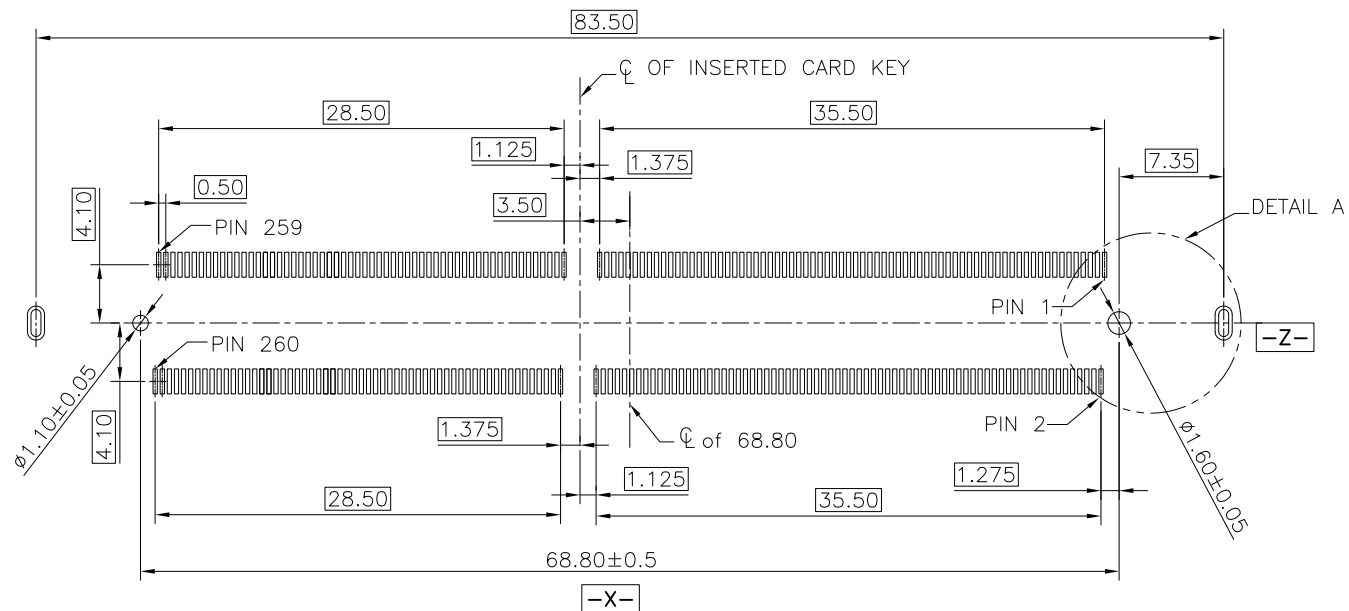








RECOMMENDED PCB LAYOUT (TOP VIEW)
DEFAULT TOLERANCES:±0.05MM

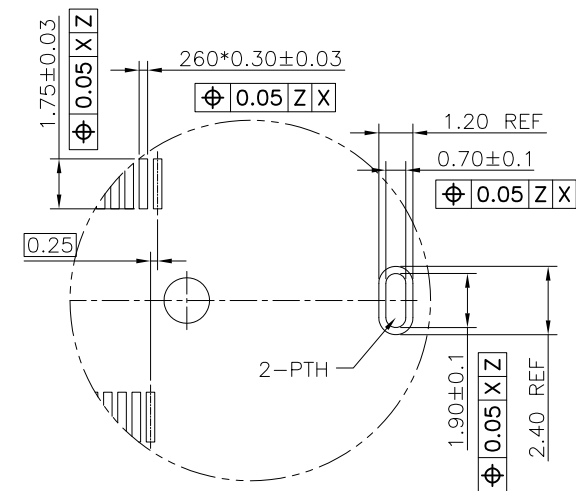

DETAIL A
SCALE 2:1

TABLE 1:

5	LCP_BLACK,Au30u",EJECTOR PA9T BLACK
4	LCP_BLACK,Au30u",EJECTOR PPA WHITE
3	LCP_BLACK,Au15u",EJECTOR PA9T BLACK
2	LCP_BLACK,Au15u",EJECTOR PA9T BEIGE
1	LCP_BLACK,Au15u",EJECTOR PPA WHITE
NO.	DESCRIPTION

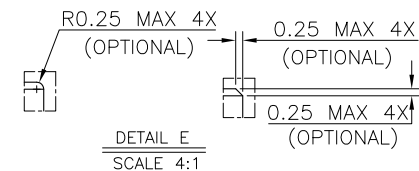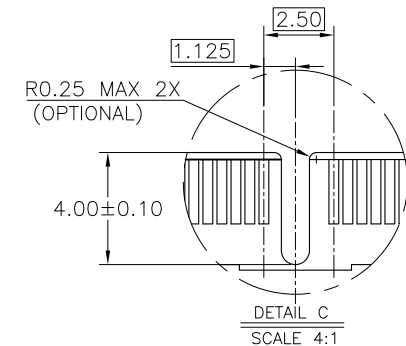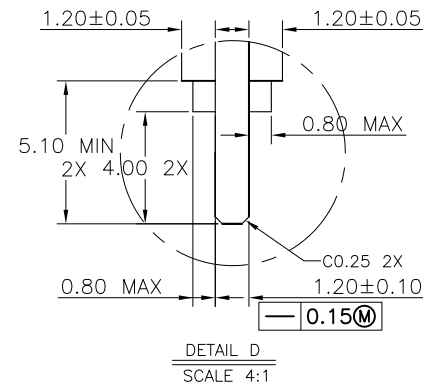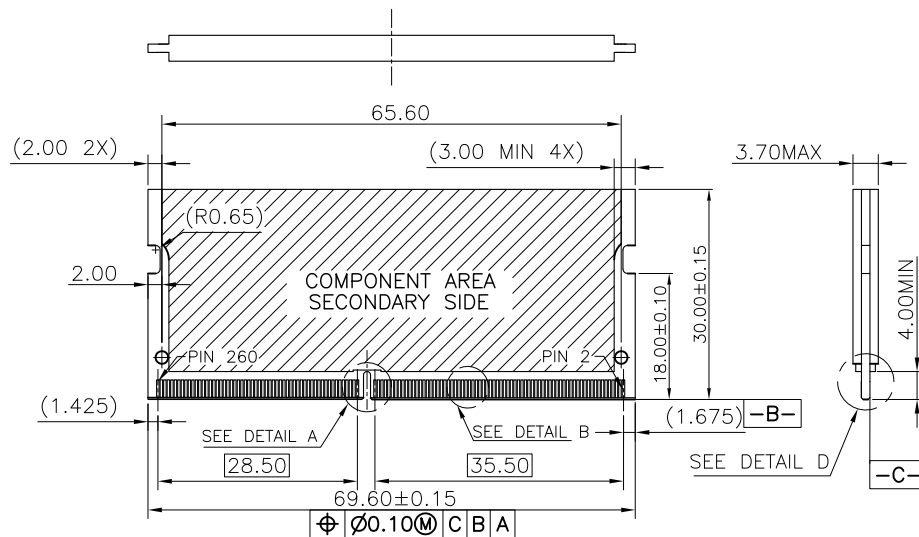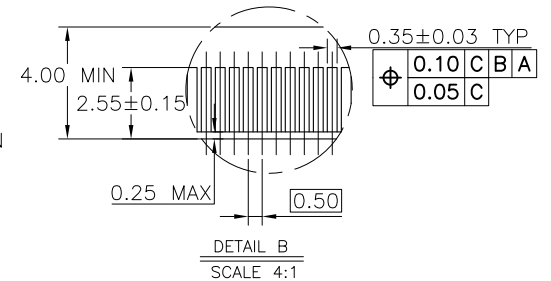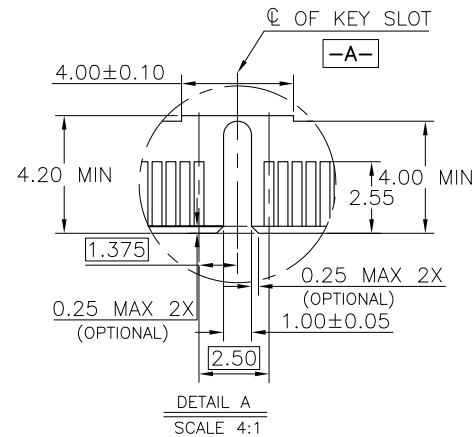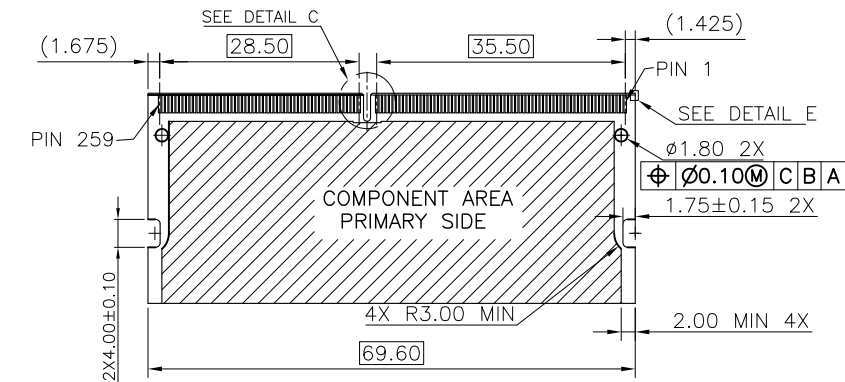

MATING P.C.B NOTES:

1. TOLERANCE ON ALL DIMENSIONS ± 0.05 UNLESS OTHERWISE SPECIFIED;
2. PCB THICKNESS APPLIES ACROSS TABS AND INCLUDES PLATING AND/OR METALIZATION;
3. FINISH OF PAD: Au PLATING 30u"min OVER Ni PLATING 80u" MIN.;
4. NO BURR.
5. CHAMFER 0.25mm max. X 45° IF EXIST.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X $\pm$ 0.35

.XX $\pm$ 0.25

.XXX $\pm$ 0.15

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

SDM5-V84V12-144116-LF

SERIES

12V




WIDTH 8.4mm

180°SMT



LEADFREE

144+116 WAY

DESCRIPTION: VERTICAL SODDR4 CONNECTOR

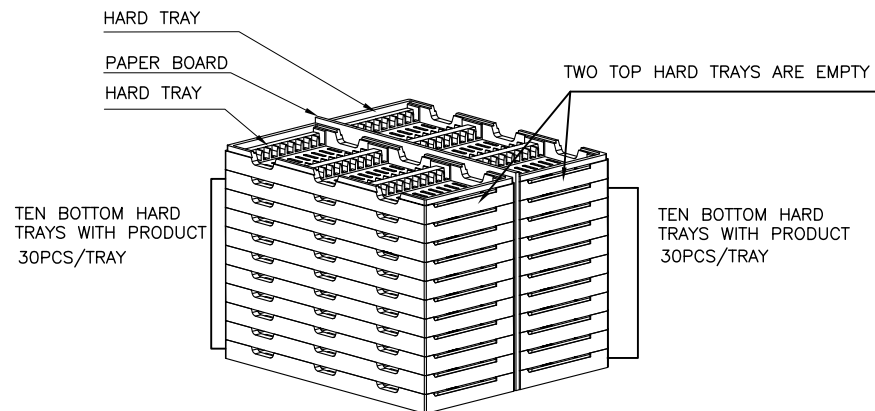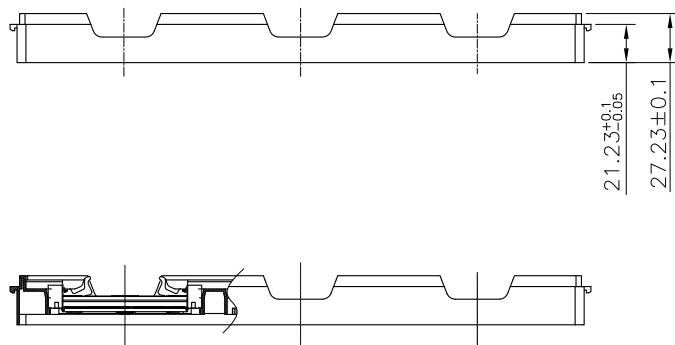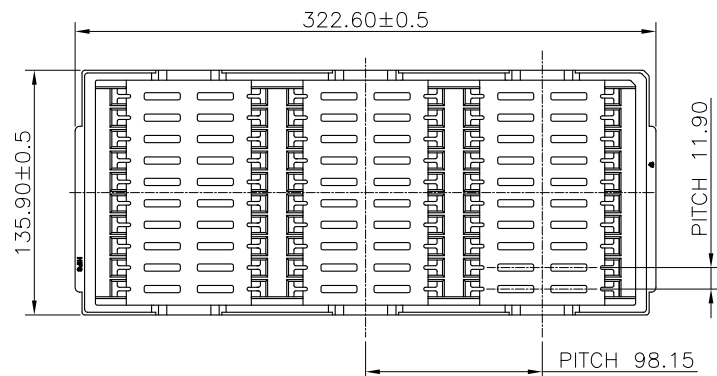

PE BAG

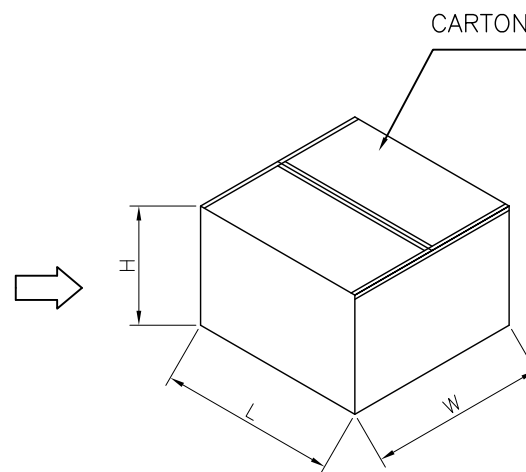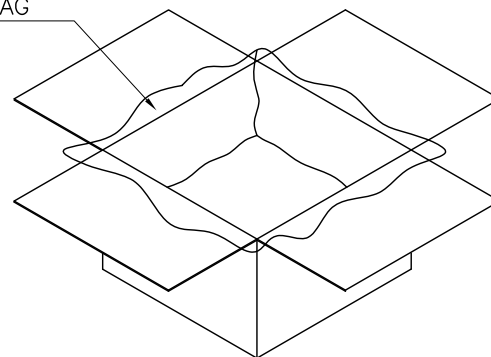

5	PE BAG	G09-6-50002-K02	400*350*350 T=0.04	1 PCS
4	CARTON	G09-1-25006-P01	285*325*255;K=A	1 PCS
3	PAPER BOARD	G09-3-30018-P01	300*270*6	3 PCS
2	HARD TRAY	G09-A-30164-K01	322.6*135.9*27.23;HIPS_BLACK	22 PCS
1	CONNECTOR	SEE TABLE 1	SEE TABLE 1	600 PCS
NO.	DESCRIPTION	PART NO.	SPECIFICATION	QT'Y

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SDM5-V84V12-144116-LF

SERIES 12V 144+116 WAY LEADFREE
WIDTH 8.4mm
180°SMT

DESCRIPTION: VERTICAL SODDR4 CONNECTOR