
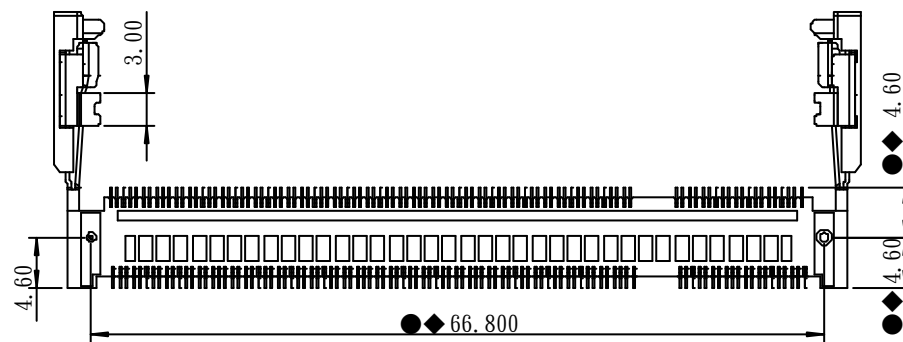

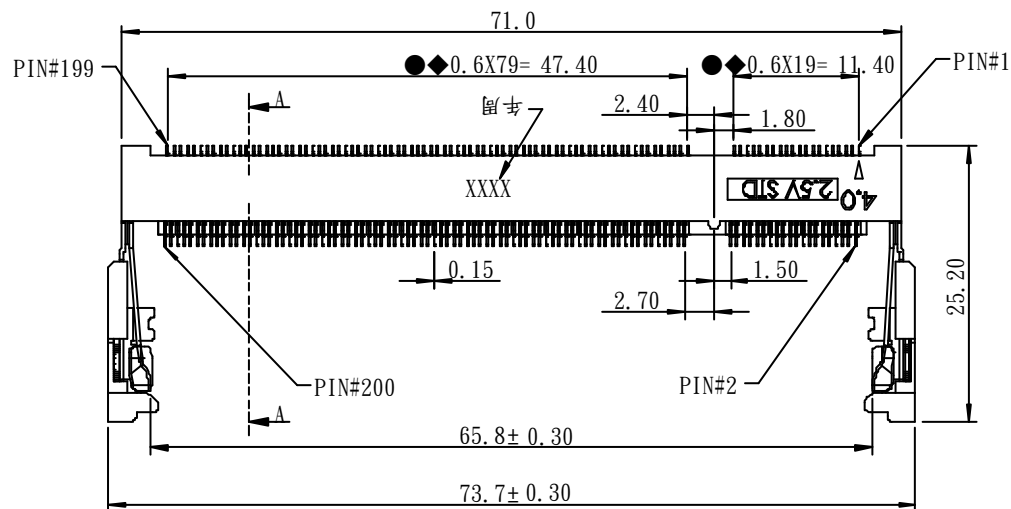


A-A (2 : 1)

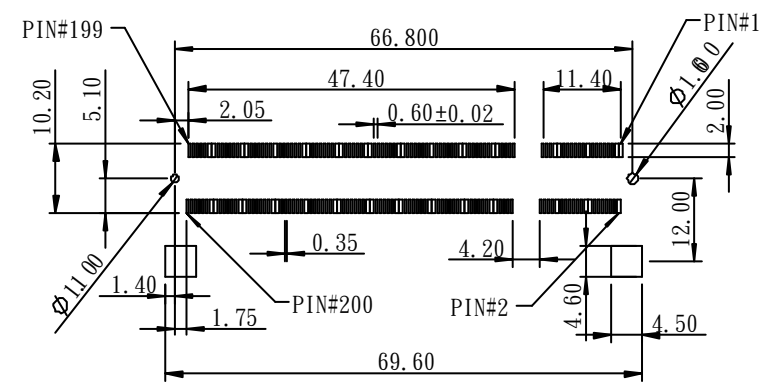

PCB LAYOUT : COMPONENT SIDE

NOTE:

1. SOLDER TAIL TO BE WITHIN 0.05 UPWARD AND 0.2 DOWNWARD FROM Z-DATUM PLACE, AND COPLANALITY OF SOLDER TAILS TO BE WITHIN 0.10. MEASUREMENT POINT IS SOLDER TAIL TIP.
2. CONTACT PLATING: UNDERPLATE 50 μ" NICKEL, CONTACT AREA: GOLD 3 μ". SELECTIVE SOLDER TAIL AREA
3. INSPECTION SYMBOL:
 ● : MANUFACTURER INSPECTION
 ◆ : Q.C INSPECTION

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

PPOJECTION





照片框

ORDER INFORMATION


SDM6-W40V25-40A6-LF

SERIES | 2.5V | 200 WAY | LEADFREE
90°SMT

DESCRIPTION:

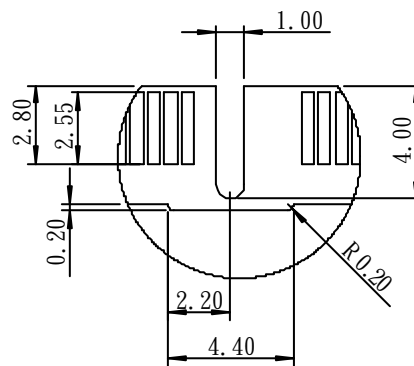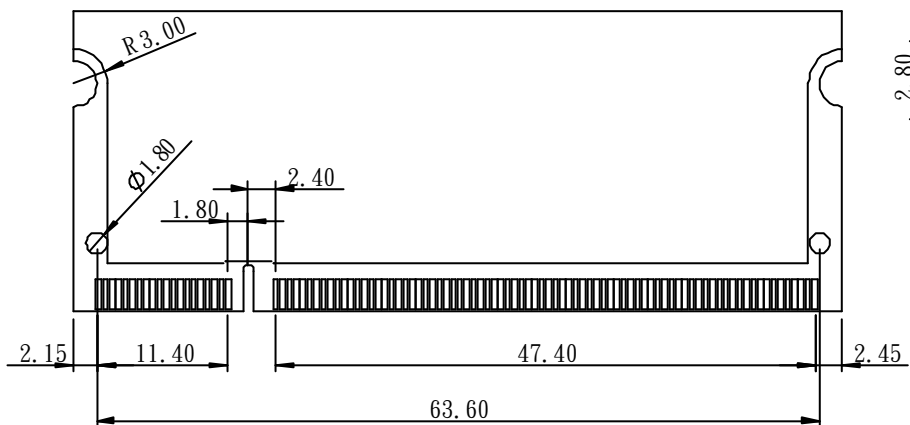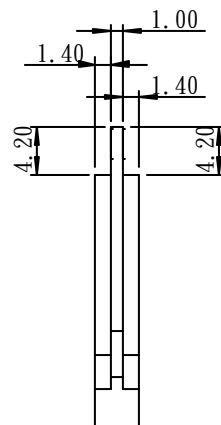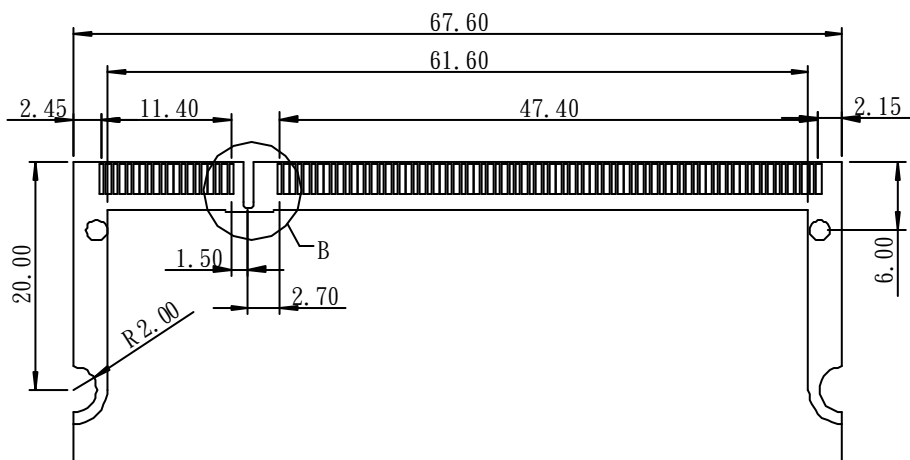

B (4 : 1)

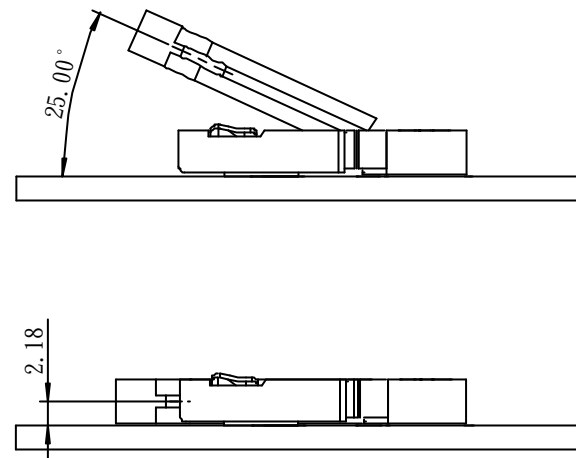

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SDM6-W40V25-40A6-LF




SERIES 2.5V 200 WAY LEADFREE

HIGH 4.0mm

90°SMT

DESCRIPTION:

DDR S.O. DIMM 200P 4.0&8.0 OVERLAY FIGURE

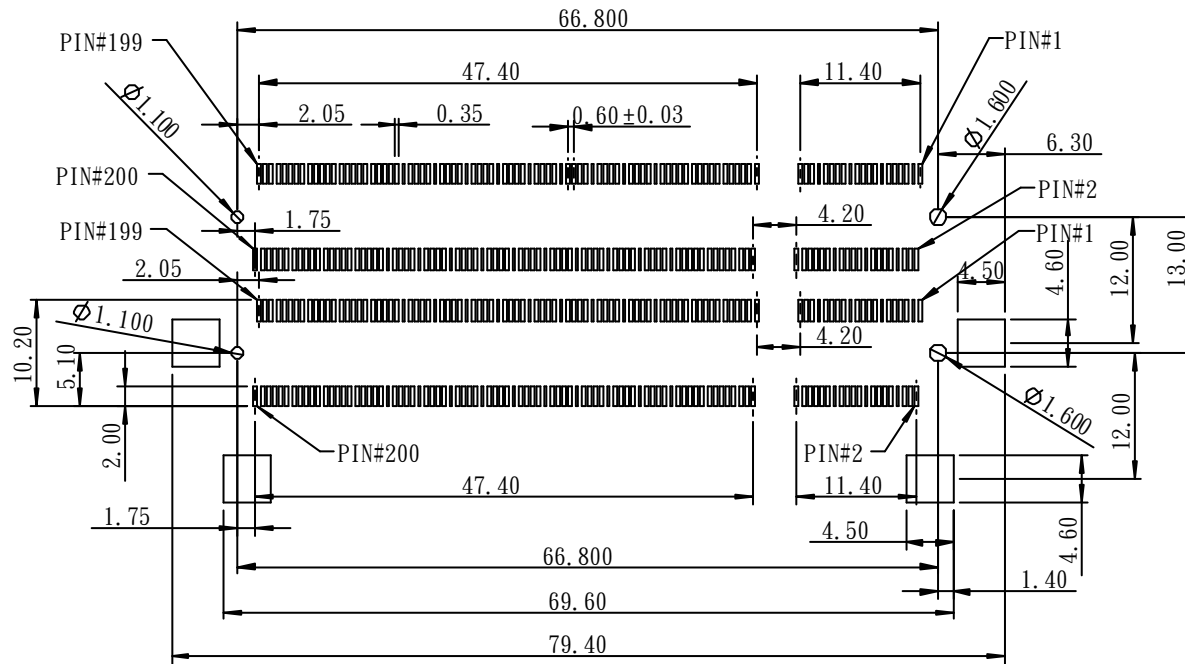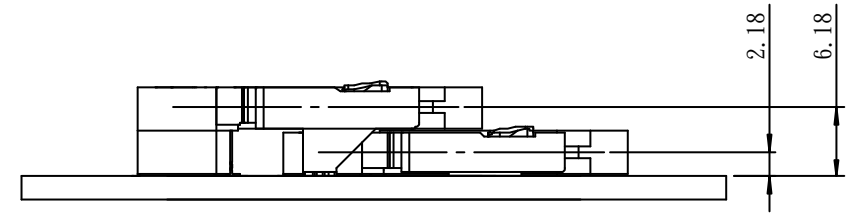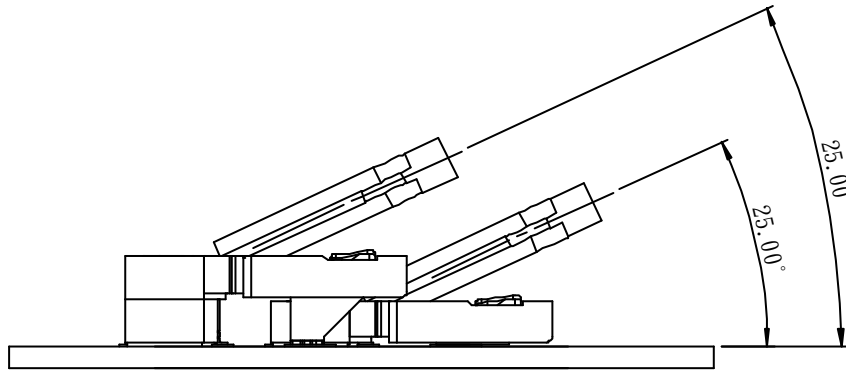

PCB LAYOUT : COMPONENT SIDE(4.0&8.0 TYPE)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG, ±

PPOJECTION

照片框

ORDER INFORMATION

SDM6-W40V25-40A6-LF

SERIES LEADFREE

2.5V 200 WAY

HIGH 4.0mm

90°SMT

DESCRIPTION: