
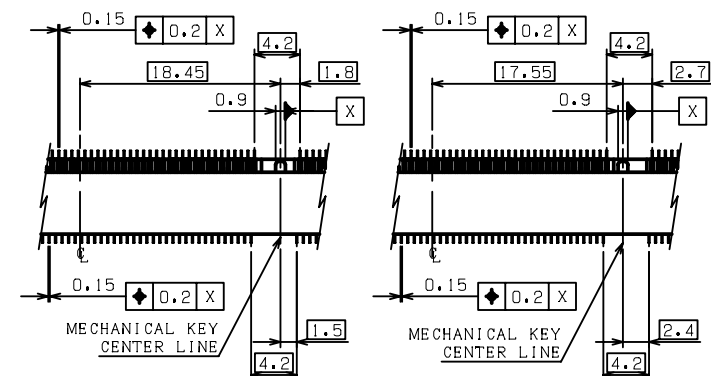
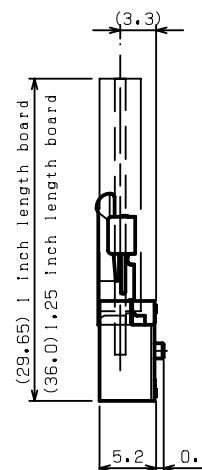


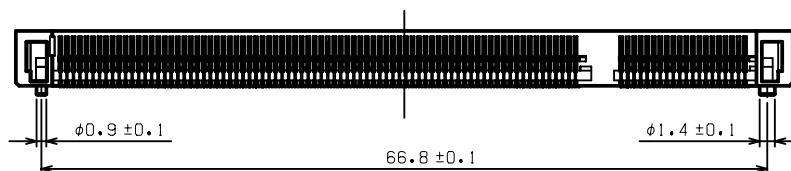


POWER SUPPLY 2.5 V
TYPE 1

POWER SUPPLY 1.8 V
TYPE 2

DETAIL E

MECHANICAL KEY TYPE

1.8V	TYPE 2
2.5V	TYPE 1
POWER SUPPLY	KEY TYPE

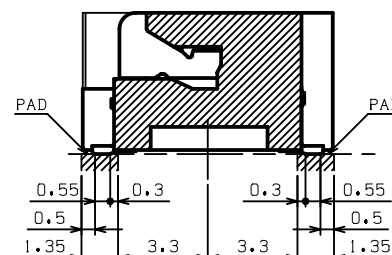

NOTES.

1. 材質: ハウジング: LCP樹脂、UL94V-0、色: 黒色
 コンタクト: 銅合金
 メタルパッド: スパルス
 MATERIAL: HOUSING: LCP, UL94V-0, COLOR: BLACK
 CONTACT: COPPER ALLOY
 METAL LATCH: SUS
2. メッキ: コンタクト: 全メッキ(接点部、半田付け部) 0.0075μmMIN、ニッケル下地 1.5μmMIN.
 PLATING: CONTACT: CONTACT POINT, SOLDER AREA):
 Au PLATE 0.0075μmMIN, Ni UNDER PLATE 1.5μmMIN.
-  コネクタを平坦面に置き、端子半田付け部の浮きは、0.1mm以下
 MUST BE MEASURED FLOATING AMOUNT OF CONTACT TAILS
 FROM DATAM SURFACE IS 0.1mm MAX.



△4 倍率適用外寸法
NOT TO SCALE.

公差非累積
TOLERANCES NON-CUMULATIVE

△6 他社のソケット用
FOR SOCKET OF THE OTHER COMPANIES

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

 $X_{\pm}$

CHECKED BY GENIUS

 $\bar{X} \pm$

UNIT / mm

$$\text{ANG} \pm$$

DATE _____

SIZE A4

PJECTION 

照片框

ORDER INFORMATION

SDM6-W52Vxx-A640-LF

SERIES

LEADFREE

160+40 WAY

V18:1.8V

V18.1.8V
V25.2.5V

V25:2.5V
HICH:5.2mm



90°SMT

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司



www.morethanall.com

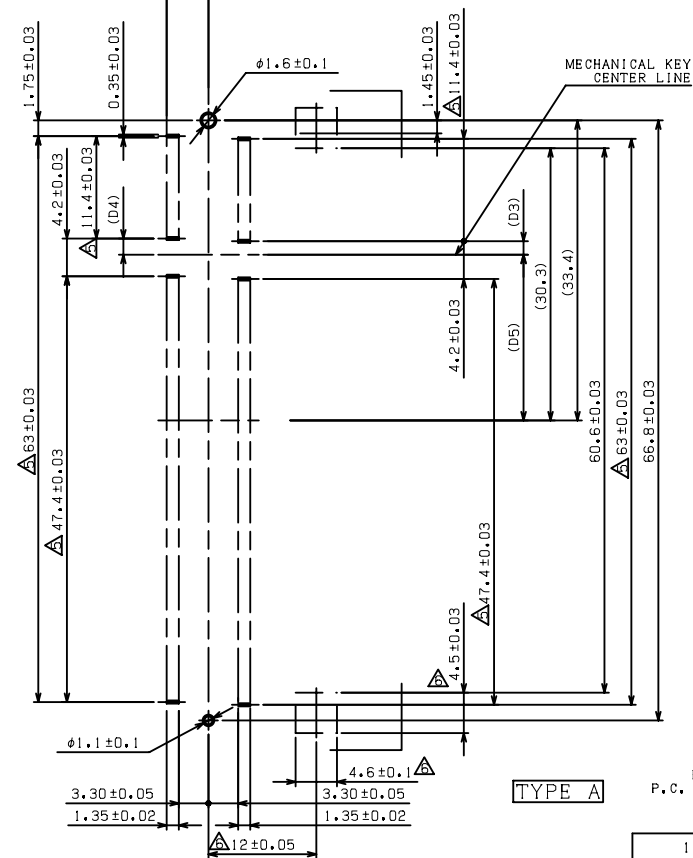

REAL SIZE (SCALE:1-1)

推奨基板レイアウト寸法
RECOMMENDED MOUNTING
P.C. BOARD PATTERN LAYOUT DIM.

1.8V	17.55	2.4	2.7
2.5V	18.45	1.5	1.8
POWER SUPPLY	D5	D4	D3



TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION 

照片框

ORDER INFORMATION

SDM6-W52Vxx-A640-LF




SERIES | | | LEADFREE
 | | | 160+40 WAY
 | | | V18:1.8V
 | | | V25:2.5V
 | | | HIGH:5.2mm
 | | | 90°SMT

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com


SIZE A4

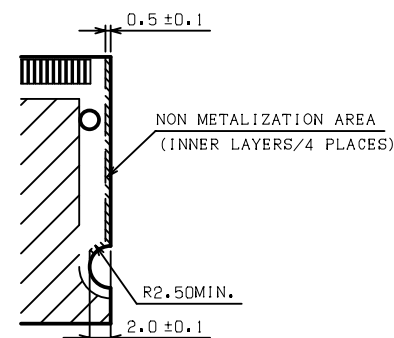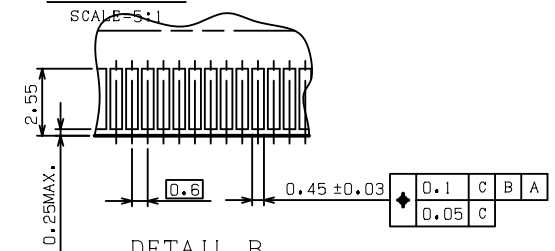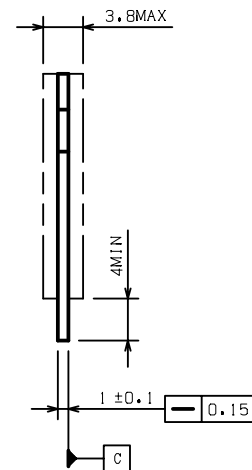

1.8V	17.55	2.4	2.7
2.5V	18.45	1.5	1.8
POWER SUPPLY	D5	D4	D3

DESCRIPTION:

www.morethanall.com

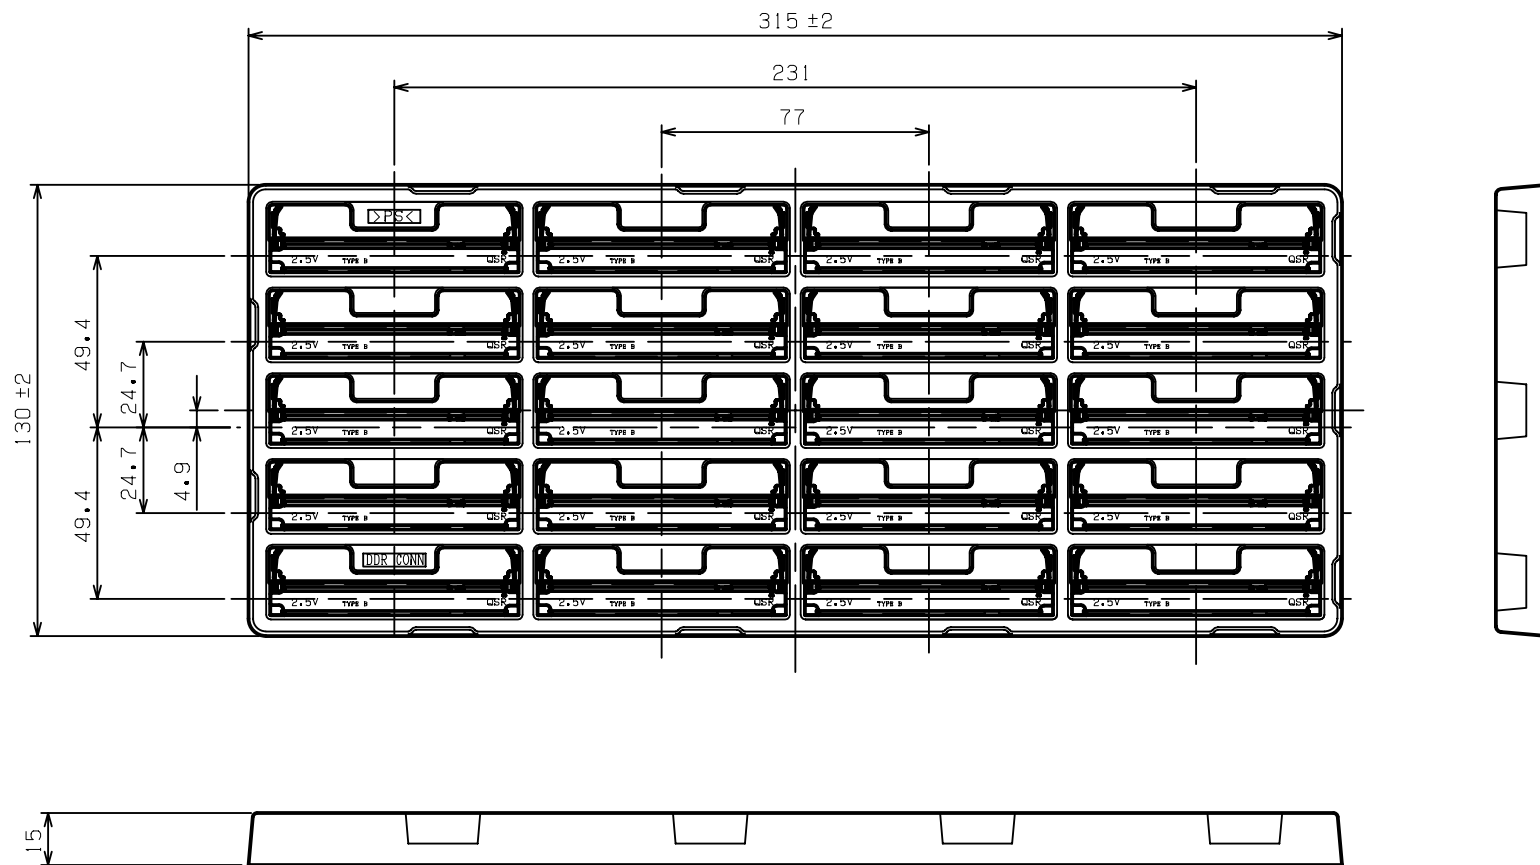

SOFT TRAY

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

ORDER INFORMATION

SDM6-W52Vxx-A640-LF

SERIES

LEADFREE

160+40 WAY

V18:1.8V
V25:2.5V

HIGH:5.2mm

90°SMT

DESCRIPTION: