


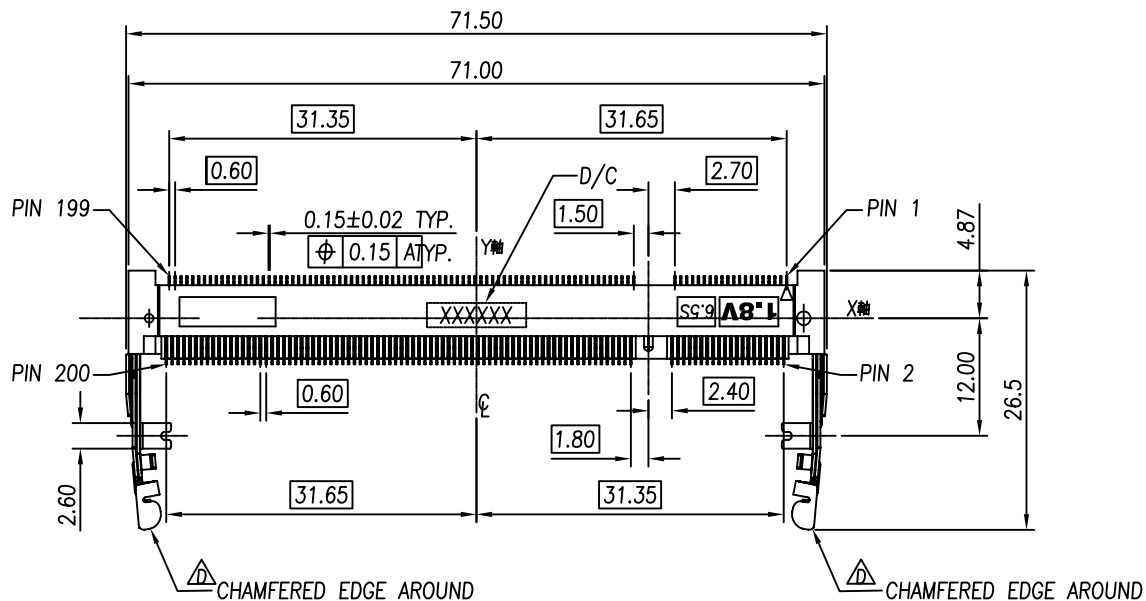

NOTES

1. MATERIAL

HOUSING: THERMOPLASTIC .UL94V-0. COLOR: NATURAL

CONTACT: COPPER ALLOY, T=0.15mm.

LATCH: SUS

2. FINISH



CONTACT: GOLD PLATING ON CONTACT AREA AND

GOLD PLATING ON SOLDER AREA

50~150u" NICKEL UNDER-PLATING ALL OVER

LATCH: 80~150u" TIN PLATING OVER

50~150u" NICKEL UNDER-PLATING ALL OVER

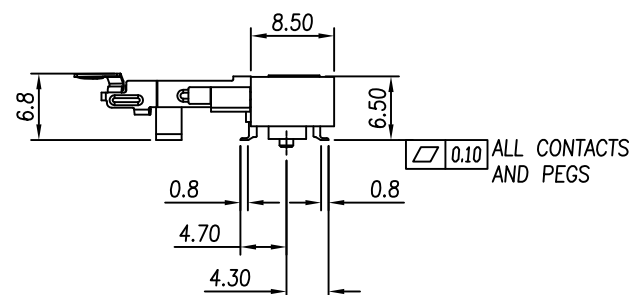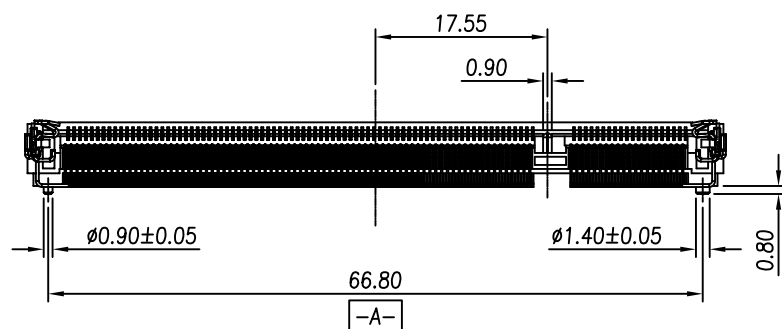

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

SDM6-W65V18-40A6-LF

SERIES

LEADFREE

40+160 WAY

1.8V

HIGH: 6.5mm




90°SMT

DESCRIPTION: DDR 200P-6.5H


MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司


www.morethanall.com




DETAIL A



DETAIL B




DETAIL C


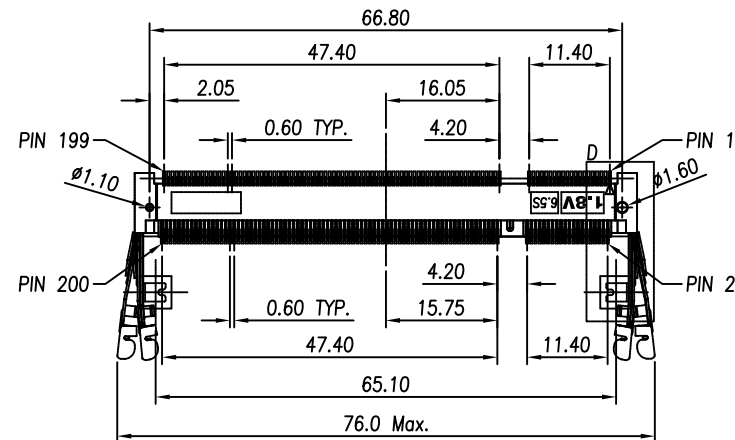


Recommended P.C.Board Layout.

Tolerance: ± 0.05



DETAIL D

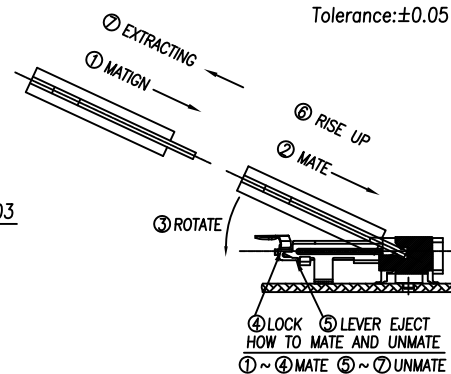

照片框

SERIES | 1.8V | 40+160 WAY | LEADFREE
HIGH:6.5mm
90°SMT

DESCRIPTION: DDR 200P-6.5H

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm




SCALE 1 : 1

DATE _____

SIZE A4

PPOJECTION

X. $\pm$
 .X $\pm$ 0.35
 .XX $\pm$ 0.25
 .XXX $\pm$ 0.10
 ANG $\pm$

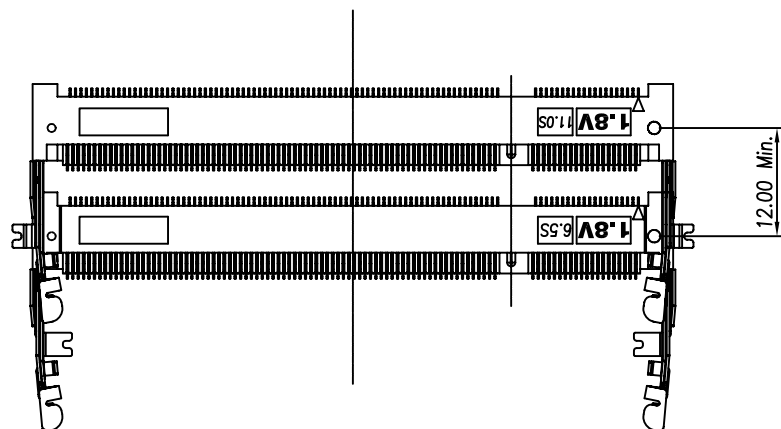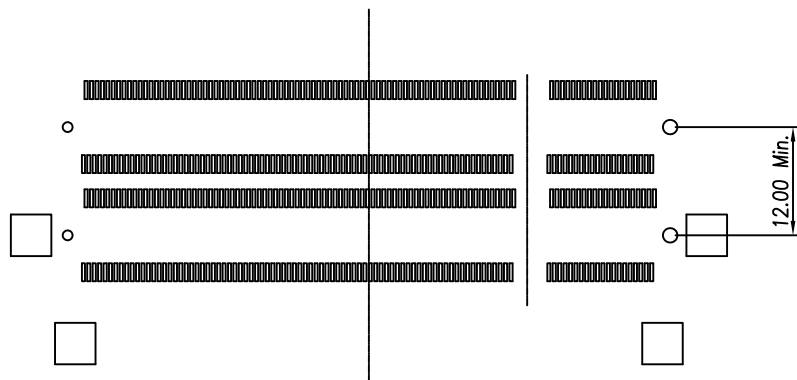

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.10
ANG ±

PPOJECTION

ORDER INFORMATION

SDM6-W65V18-40A6-LF

SERIES

1.8V

HIGH: 6.5mm

90°SMT

40+160 WAY

LEADFREE

DESCRIPTION: DDR 200P-6.5H

煜倫股份有限公司

www.morethanall.com