
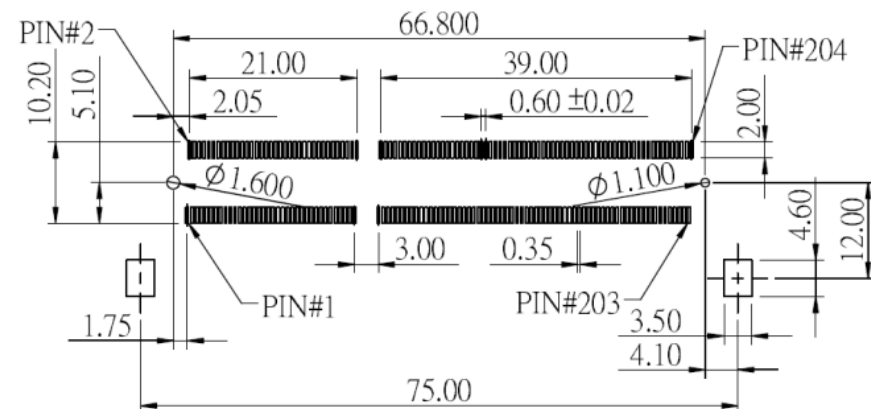


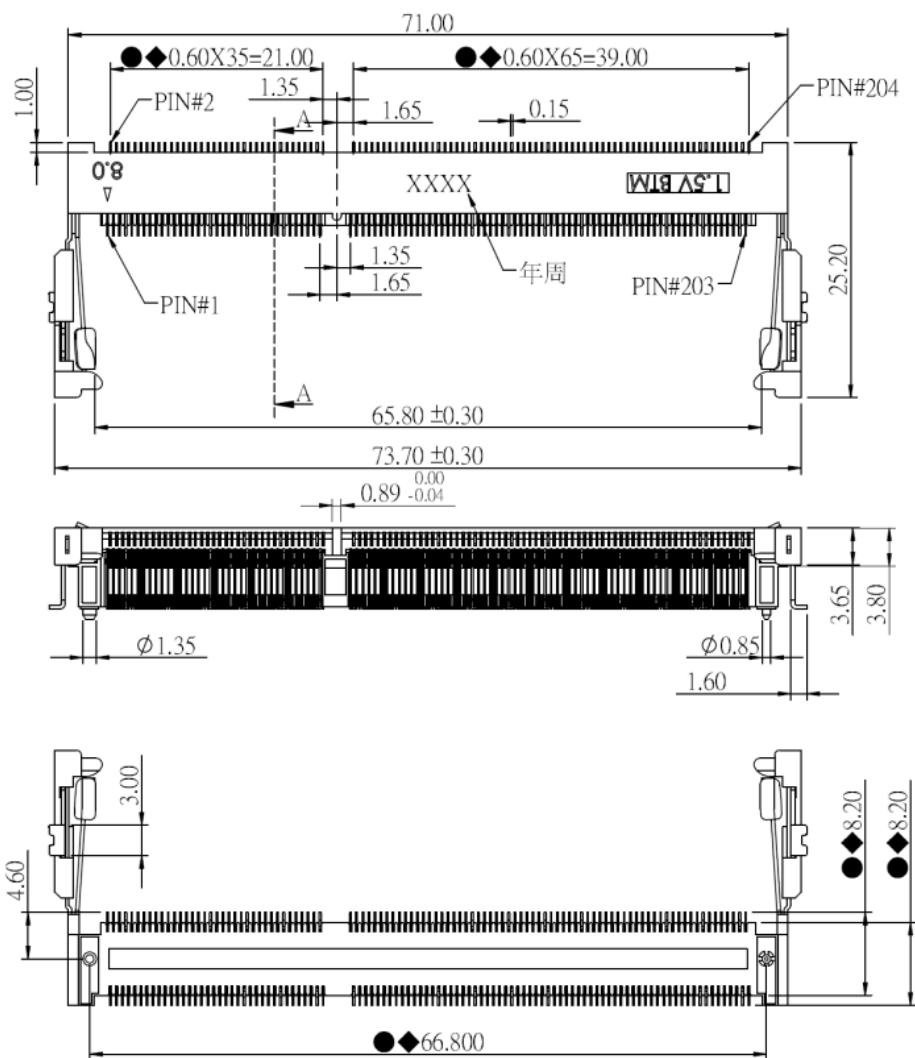

NOTE:

1. SOLDER TAIL TO BE WITHIN 0.05 UPWARD AND 0.2 DOWNWARD FROM Z-DATUM PLACE, AND COPLANALITY OF SOLDER TAILS TO BE WITHIN 0.10. MEASUREMENT POINT IS SOLDER TAIL TIP.

2. INSPECTION SYMBOL:

● : MANUFACTURER INSPECTION
◆ : Q.C INSPECTION

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.20

.XX ± 0.10

.XXX ± 0.05

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SDM6-W80V15-A372-LF

SERIES

1.5V







HIGH 8.0mm

90°SMT

LEADFREE

204 WAY

DESCRIPTION:

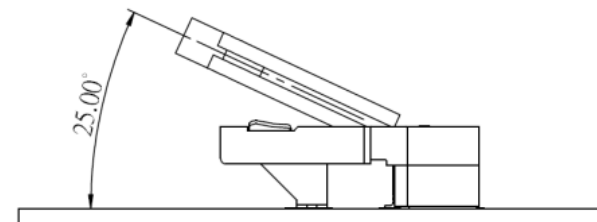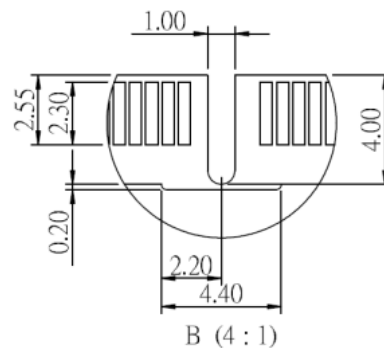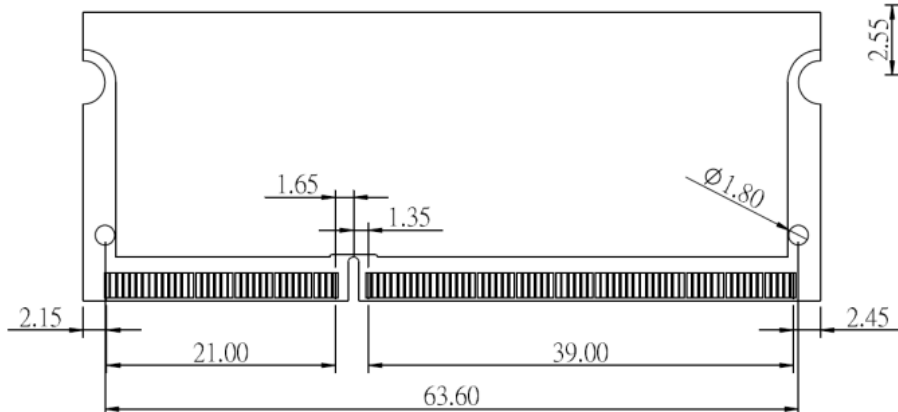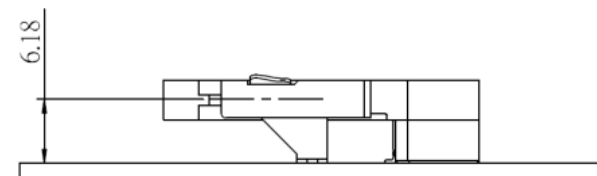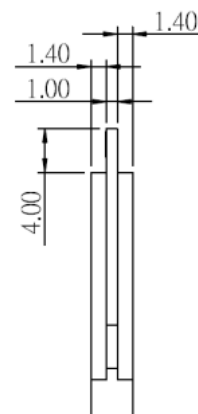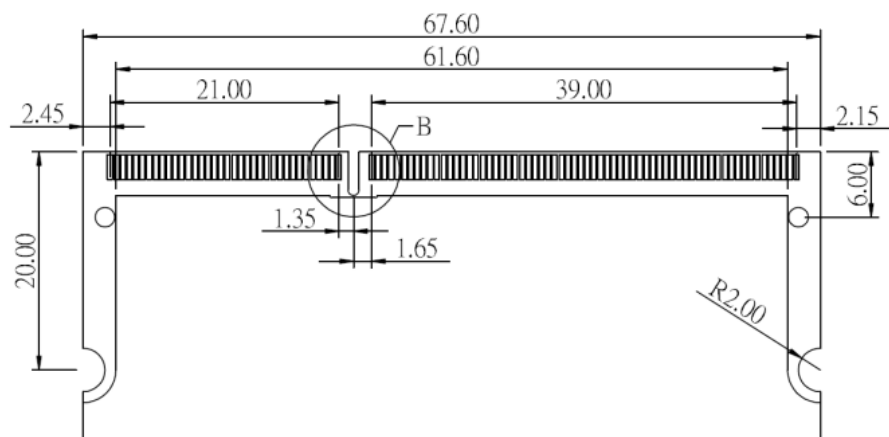

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.20

.XX ± 0.10

.XXX ± 0.05

ANG ±

PJECTION

照片框

ORDER INFORMATION

SDM6-W80V15-A372-LF

SERIES


1.5V

HIGH 8.0mm

90°SMT

LEADFREE
204 WAY

DESCRIPTION:

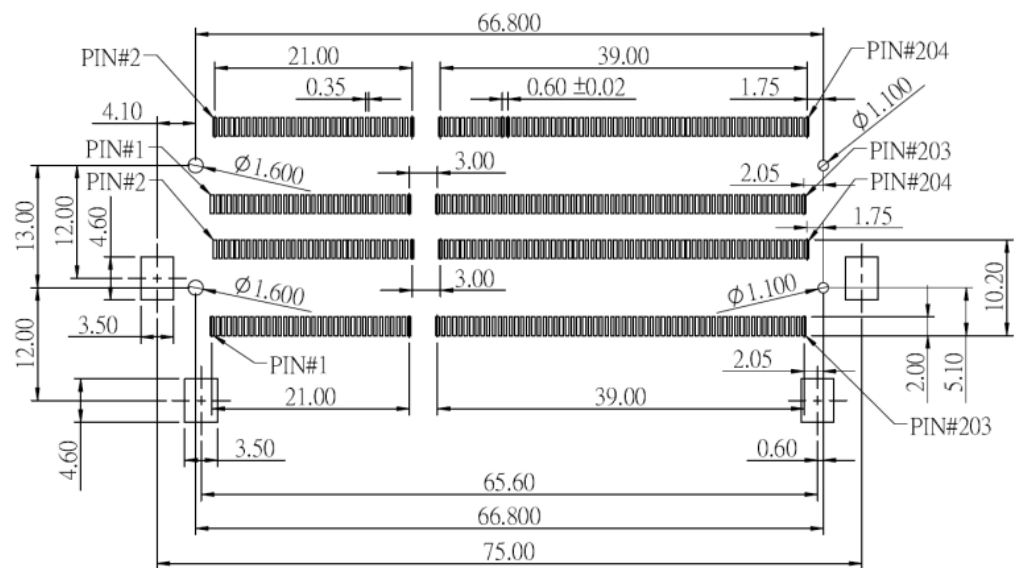

PCB LAYOUT:COMPONENT SIDE(4.0&8.0 TYPE)

DESCRIPTION: