

NOTES




*Material:

Body: LCP,UL 94V-0 Rated. Color: White.
 Contacts: Phosphor Broze.
 Plating: Gold Plating Over Nickel on Contact.
 Atea; Tin Plating On Solder Tail.
 Buttress: Stainless steel
 Stator: Stainless steel



*Electrical Specification

Operation Voltage: 25 VAC Max.
 Current Rating: 0.3 Ampere Per Contact.
 Insulation Resistance: 250 Megohms Min.
 Contact Resistance: 30 Milliohms Max. Initial 20 Milliohms
 Max. Increase Through Testing.
 Dielectric Withstanding Voltage: 250 VAC.
 Operating Temperature: -40°C to +85°C


Part Number	Dim.A
SDM6-W100Vxx-A640	10.0mm
SDM6-W52Vxx-A640	5.2mm
SDM6-W40Vxx-A640	4.0mm
SDM6-W57Vxx-A640	5.7mm

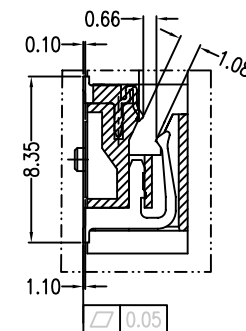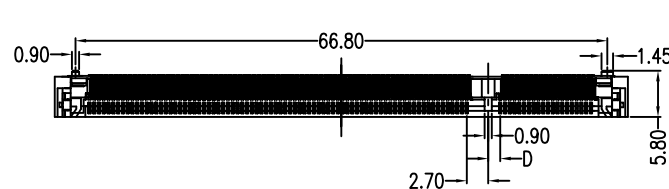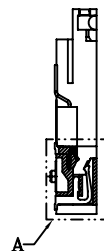

DETAIL:A
SCALE:2:1

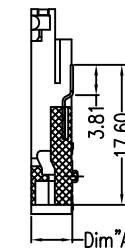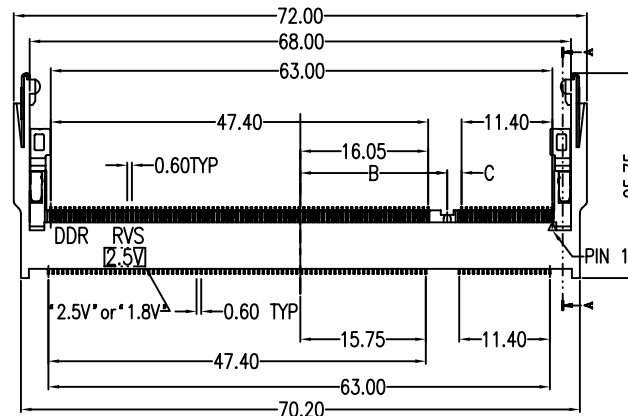

SECT:F-F

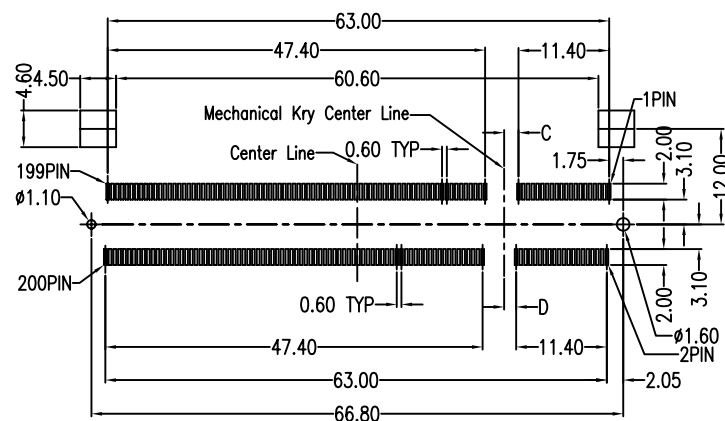

P.C.B LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ±


照片框

ORDER INFORMATION


SDM6-WxxVxx-A640-LF

SERIES H 40:4.0mm V18:1.8V 40+160 WAY LEADFREE
 90°SMT 52:5.2mm V25:2.5V
 57:5.7mm
 100:10.0mm

DESCRIPTION: SO DIMM 200P RVS Type (Plastic Ear) Assemble

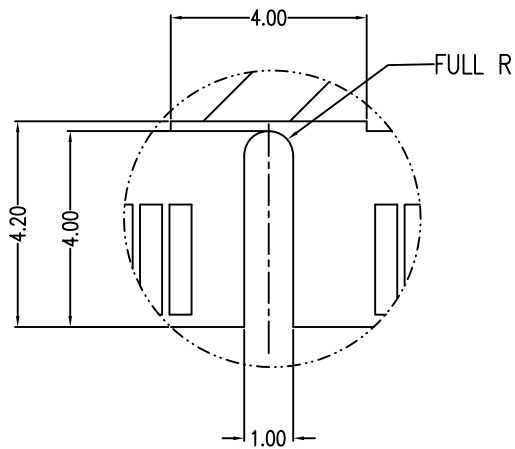


DETAIL A
SCALE 6:1

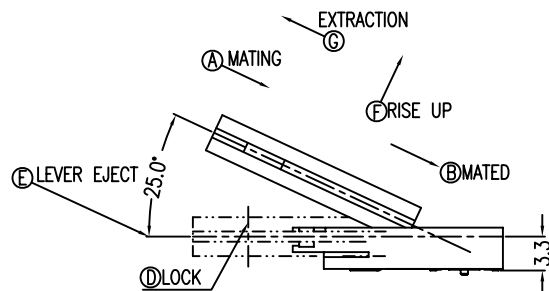


HOW TO MATE AND UNMATE

SETP 1.MATE PROCESS (A)→(B)→(C)→(D)
SETP 2.UNMATE PROCESS (E)→(F)→(G)

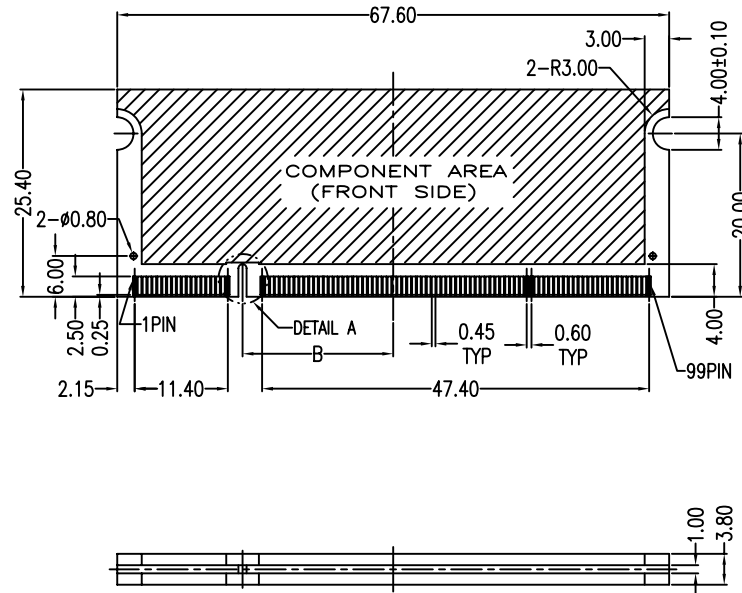

TYPE	DIMENSION		
	B	C	D
2.5V	18.45	1.80	1.50
1.8V	17.55	2.70	2.40

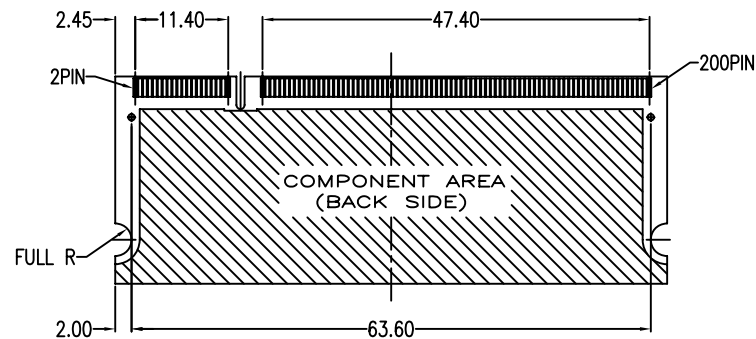

DDR SO-DIMM MODULE BOARD LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SDM6-WxxVxx-A640-LF
SERIES H 40:4.0mm V18:1.8V 40+160 WAY LEADFREE
90°SMT 52:5.2mm V25:2.5V
57:5.7mm
100:10.0mm

DESCRIPTION: SO DIMM 200P RVS Type (Plastic Ear) Assemble