

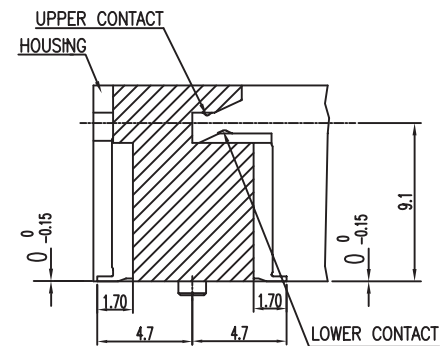
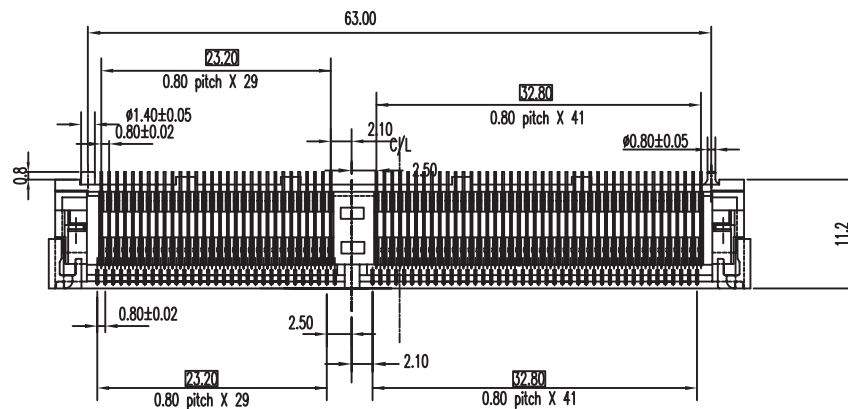





SECT A-A

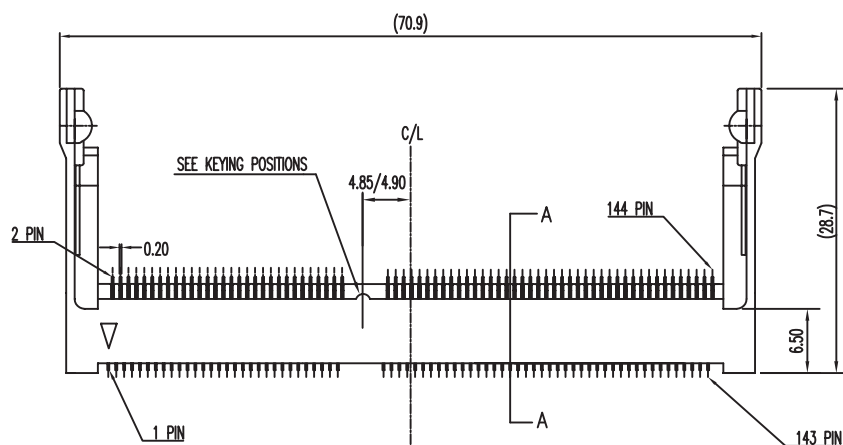

DETAIL FOR KEY POSITIONS

NOTES:

- 1, GENERAL TOLERANCE IS  $\pm 0.1$ ,  $\pm 0.30^\circ$ .
- 2, NO DAMAGE AFTER ASSEMBLE.
- 3, MATERIAL: HOUSING=LCP / UL94V-0  
COLOR: NATURAL=3.3V DRAM, BLACK=X.XV DRAM.  
CONTACT=PHOS-BRONZE( $t=0.2$ )  
SOLDER TAB=PHOS-BRONZE( $t=0.35$ )

- 4, FINISH: CONTACT GOLD PLATING ON CONTACT AREA  
(PLEASE REFER TO PART NUMBER)  
(100u" TIN OR GOLD FLASH) LEAD ON SOLDER AREA  
40u" NICKEL UNDERPLATED FOR ENTIRE CONTACT

SOLDER TAB=120u" TIN LEAD 90/10  
40u" NICKEL UNDERPLATED FOR ENTIRE TAB.

- 5, PACKAGING SPEC. PK-501-01

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X,  $\pm$

.X,  $\pm$

.XX,  $\pm$

.XXX,  $\pm$

ANG  $\pm$

PPOJECTION

照片框

ORDER INFORMATION

SDM8-W110V33-6084-LF

SERIES

LEADFREE




60+84WAY

3.3V

HIGH 11.0mm

90°SMT

DESCRIPTION: S.O.DIMM 144 POS (11) ASSEMBLY CUSTOMER DRAWING

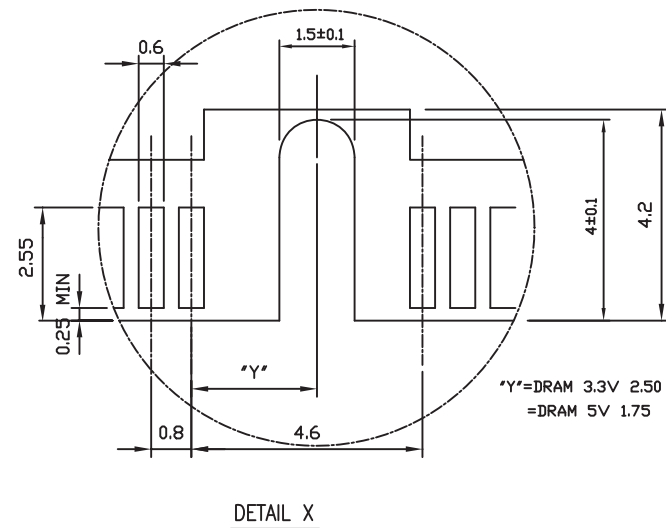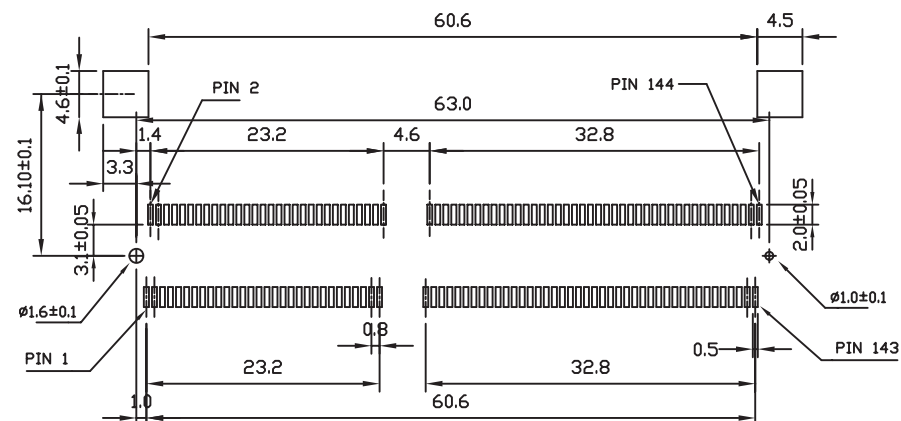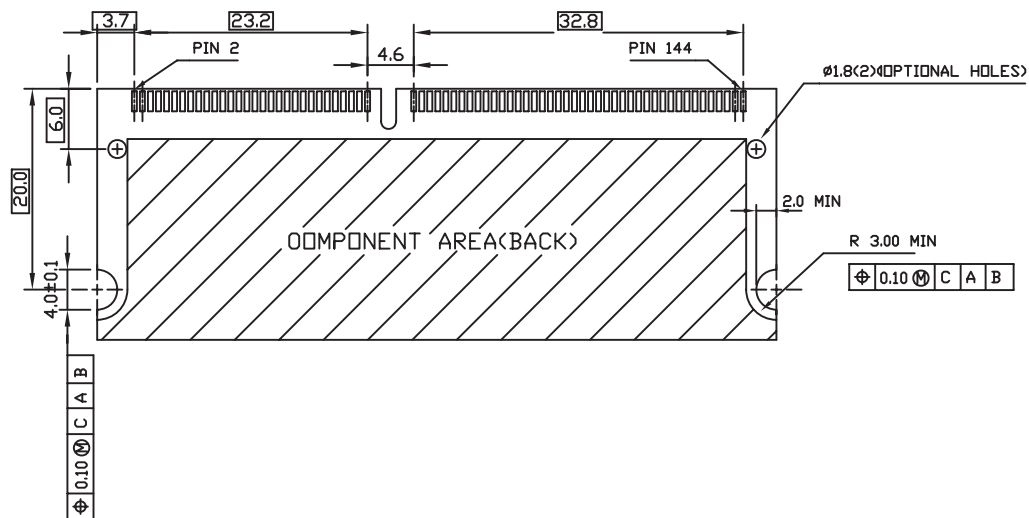

TOLERANCES ARE

**[www.morethanall.com](http://www.morethanall.com)**

PPOJECTION 

X.  $\pm$   
.X  $\pm$   
.XX  $\pm$   
.XXX  $\pm$   
ANG  $\pm$

# 照片框

## ORDER INFORMATION

3.3V  
HIGH 11.0mm  
90°SMT

DESCRIPTION: RECOMMENDED PCB LAYOUT FOR S.O.DIMM MODULE AND PATTERN