

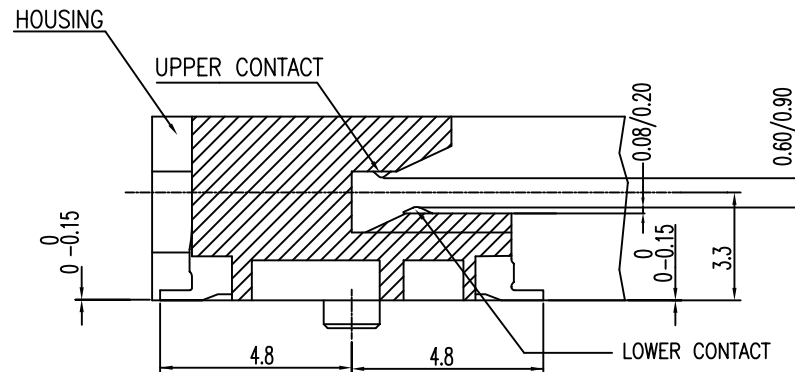
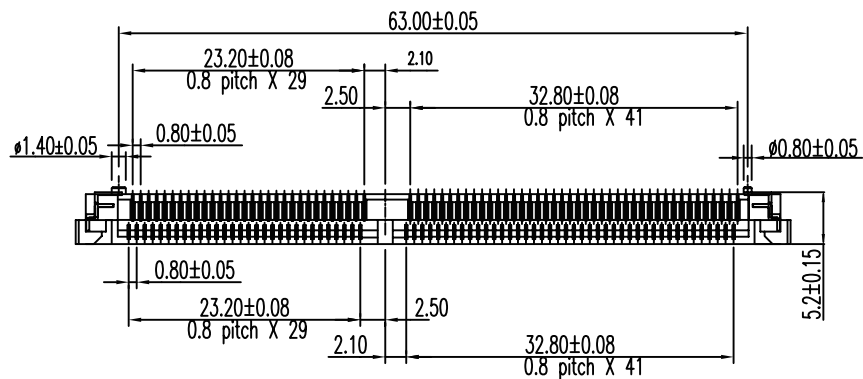
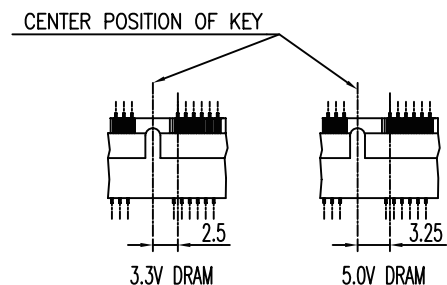




SECT "A"-"A" (S=4/1)

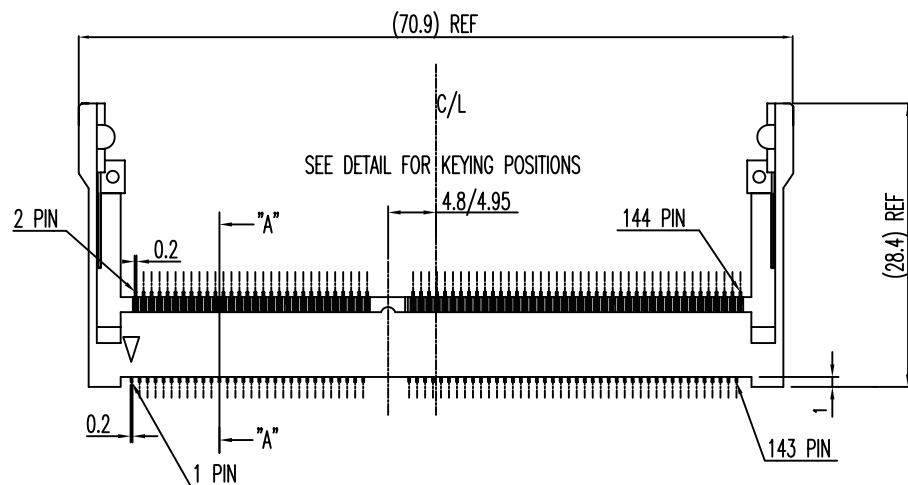

DETAIL FOR KEY POSITIONS

NOTES:

- 1, GENERAL TOLERANCE IS ± 0.1 , $\pm 0^\circ 30'$.
- 2, NO DAMAGE AFTER ASSEMBLE.
- 3, MATERIAL: HOUSING=LCP / UL94V-0
COLOR: NATURAL=3.3V DRAM, BLACK=X.XV DRAM.

CONTACT=PHOS-BRONZE(t=0.2)

SOLDER TAB=PHOS-BRONZE(t=0.3)

- 4,FINISH: CONTACT GOLD PLATING ON CONTACT AREA
(PLEASE REFER TO PART NUMBER)
(100u" TIN OR GOLD FLASH)LEAD ON SOLDER AREA
40u" NICKLE UNDERPLATED FOR ENTIRE CONTACT

SOLDER TAB=120u" TIN LEAD 90/10

40u" NICKEL UNDERPLATED FOR ENTIRE TAB.

- 5,PACKAGING SPEC. PK-500-00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

SDM8-WxxVxx-6084-LF





SERIES | LEADFREE

90°SMT | 60+84WAY

40:HIGH 4.0mm
52:HIGH 5.2mm
56:HIGH 5.6mm
99:HIGH 9.9mm

V33:3.3V
V50:5.0V

DESCRIPTION:

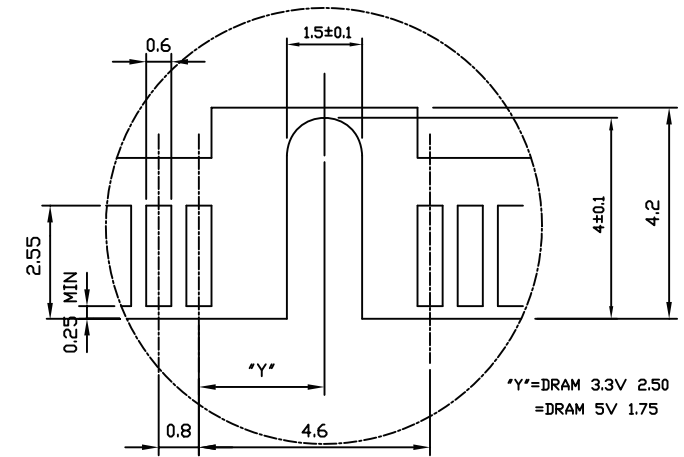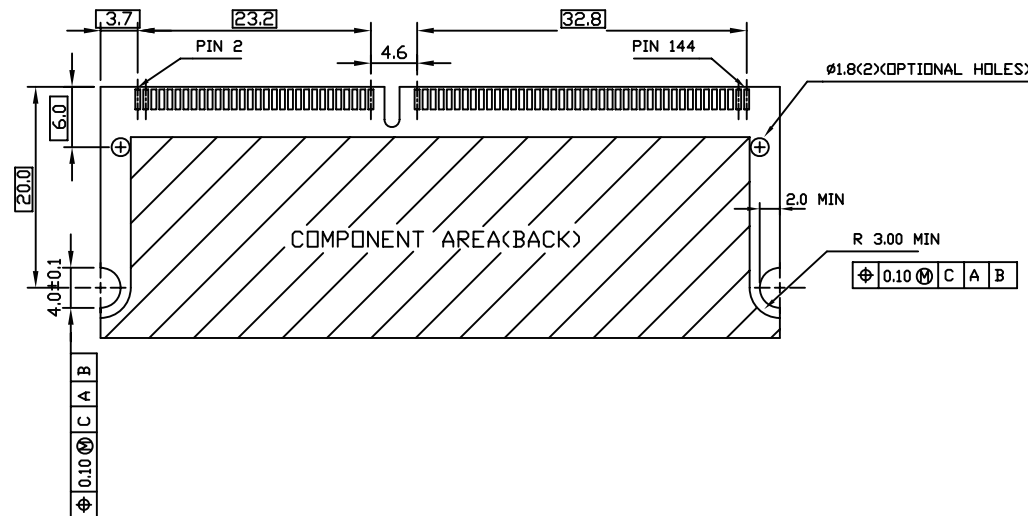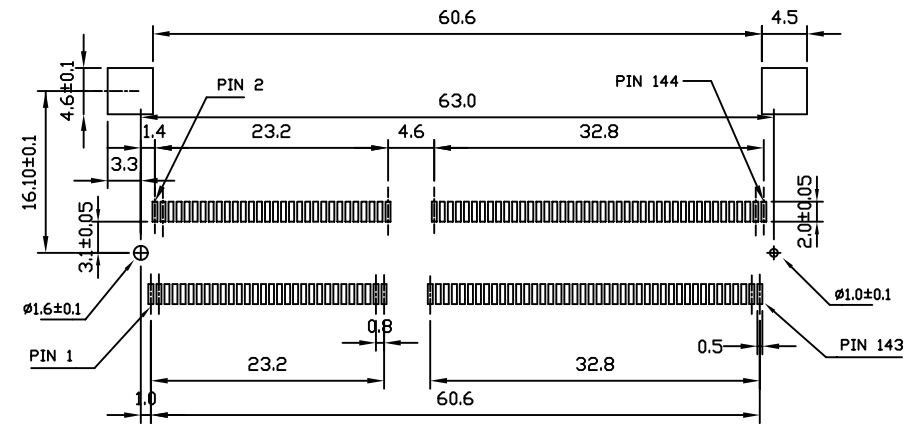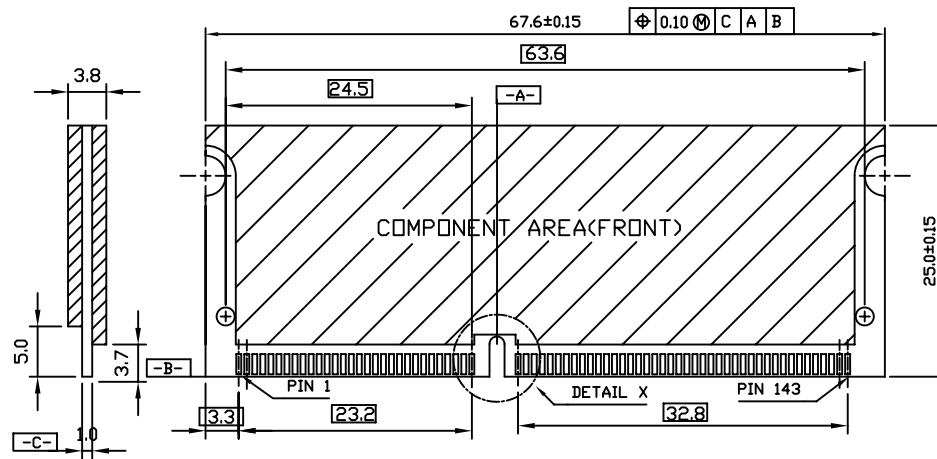

DETAIL X

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SDM8-WxxVxx-6084-LF

SERIES

90°SMT

40: HIGH 4.0mm

52: HIGH 5.2mm

56: HIGH 5.6mm

99: HIGH 9.9mm

LEADFREE

60+84WAY

V33: 3.3V

V50: 5.0V

DESCRIPTION: RECOMMENDED PCB LAYOUT FOR S.O.DIMM MODULE AND PATTERN