


Specifications  
 Current Rating: 2.0Amp  
 Insulation Resistance: 1000MΩMin.  
 Dielectric Withstanding Voltage: 500VAC  
 Contact Resistance: 20mΩMax.  
 Operating Temperature: -40°C to +105°C  
 Materials  
 Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon (Halogen Free) or the equivalent material

Recommended P.C.Board  
 Layout  
 (Tolerance: ±0.05)

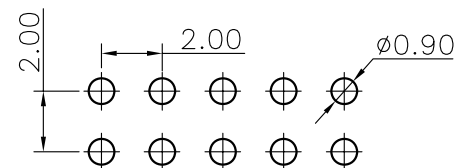

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30  
 .X ± 0.25  
 .XX ± 0.15  
 .XXX ± 0.10  
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SE-D085030-2Xxx-LF  
 SERIES  
 DIP 180°  
 LEADFREE  
 2X02:04WAY  
 2X30:60WAY  
 DIP 3.0mm  
 HIGH 8.50mm

DESCRIPTION: 2.00 FEMALE HEADER DUAL ROWS DIP TYPE CONNECTOR