
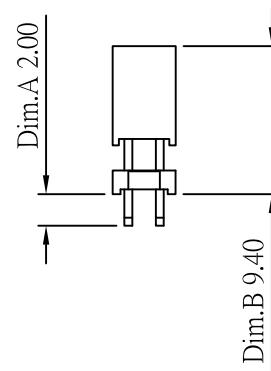
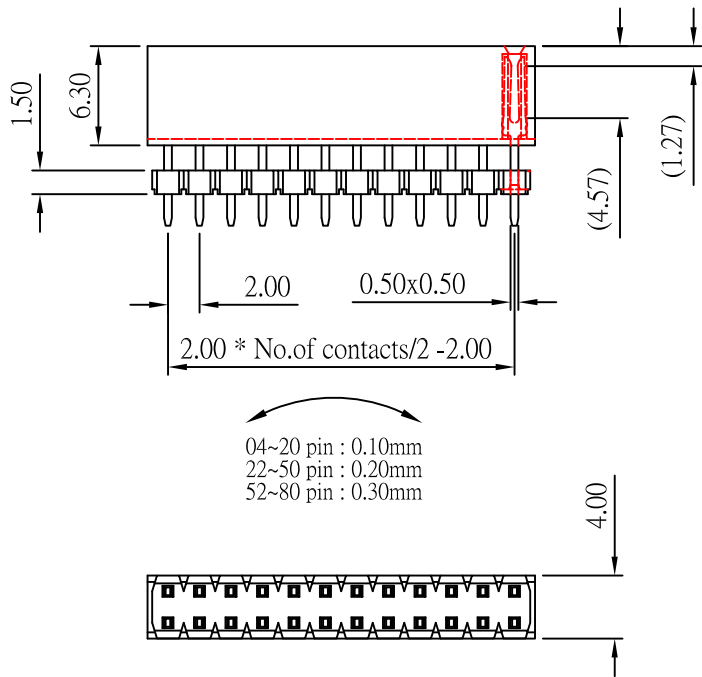
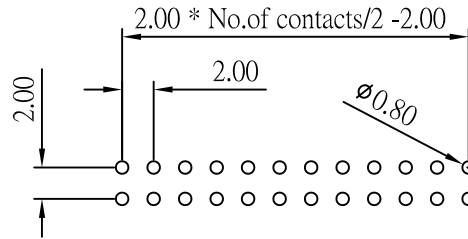


Recommended P.C. Board  
Hole Layout

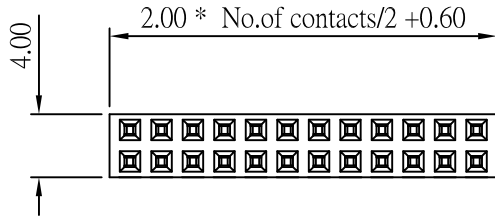

Current Rating and voltage: 2 Amps 250V(r.m.s)  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: - 40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Copper Alloy  
 Insulator Material: High Temperature  
 Plastic,UL 94V-0  
 Finish: Standard: Gold Flash all over

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1 : 1  
 DATE

X. ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ± 0.10  
 ANG ±

照片框

ORDER INFORMATION

SE-D094020-2Xxx-LF  
 SERIES | LEADFREE  
 2X02:04WAY  
 2X40:80WAY  
 DIP 2.0mm  
 HIGH 9.4mm  
 DIP 180°

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION

DESCRIPTION: