


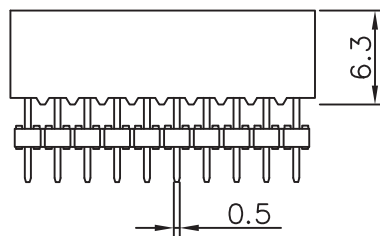


No. of Contacts	DIMENSIONS	
	A	B
24	10.00	12.40
28	12.00	14.40
32	14.00	16.40
36	16.00	18.40
40	18.00	20.40
44	20.00	22.40
48	22.00	24.40
52	24.00	26.40
56	26.00	28.40
60	28.00	30.40
64	30.00	32.40
68	32.00	34.40
72	34.00	36.40
76	36.00	38.40
80	38.00	40.40
84	40.00	42.40
88	42.00	44.40
92	44.00	46.40
96	46.00	48.40
100	48.00	50.40
104	50.00	52.40
108	52.00	54.40
112	54.00	56.40
116	56.00	58.40
120	58.00	60.40

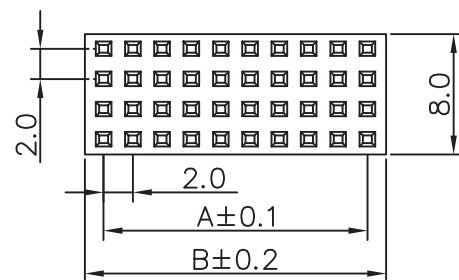

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Contact resistance: 20 m ohms max.
 Dielectric withstanding: AC 500 V
 Operating Temperature: $-40^{\circ}\sim+105^{\circ}\text{C}$
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Copper Alloy
 Insulator Material: High Temperature plastic, UL 94V-0

Finish: Tin, Gold or Duplex plated

◎ Standard: Duplex plated

◎ Note:

Duplex plating: gold plated on contact area,
Tin on solder area

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
 .X $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$

照片框

ORDER INFORMATION

SE-D094023-4Xxx-LF

SERIES
 LEADFREE
 4X06:24WAY
 4X30:120WAY
 DIP 2.28mm
 HIGH 9.35mm
 DIP 180°

DESCRIPTION: