

1 2 3 4 5 6 7 8 9 0

J

I

H

G

F


E

D




C

B

A



$0.4 + 2.0 \times \text{No. of Positions} \pm 0.3$

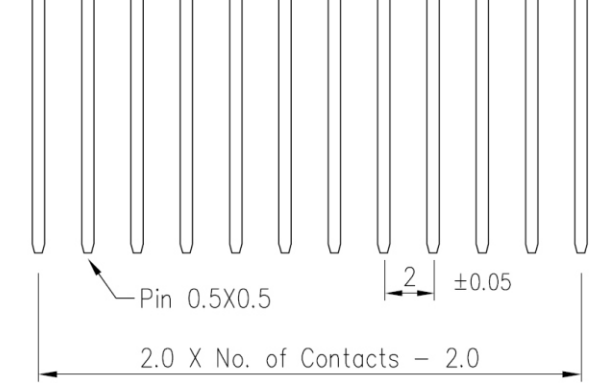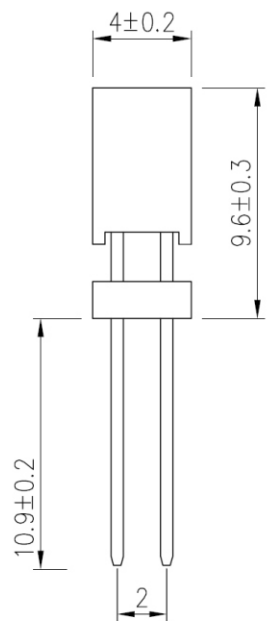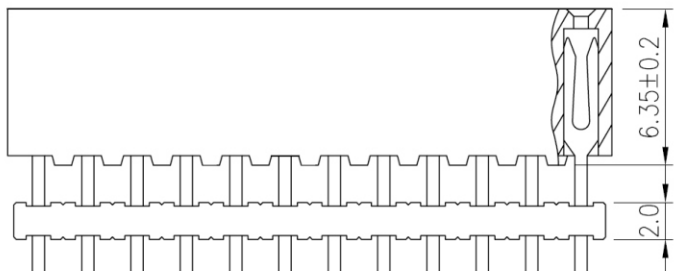

Specifications


- Current Rating : 1 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 500V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Phosphor Bronze
- Insulator Material : Polyester, UL 94V-0
- Standard : Nylon-6T
- Contact Plated : Full Gold, Full Tin, Selective Plated

SE-D096109-2Xxx-LF

LEADFREE

RoHS Compliant

Recommended
P.C. Board
Hole Layout

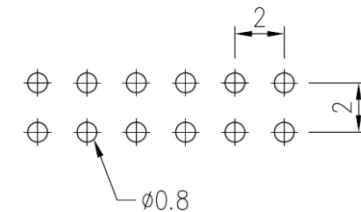

PART NO. **SE-D096109-2Xxx**

DWG NO. **SE-D096109-2Xxx**

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

- .X ± 0.2
- .XX ±
- .XXX ±
- AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司