

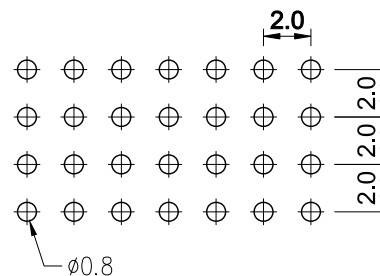


Recommended P.C. Board Hole Layout

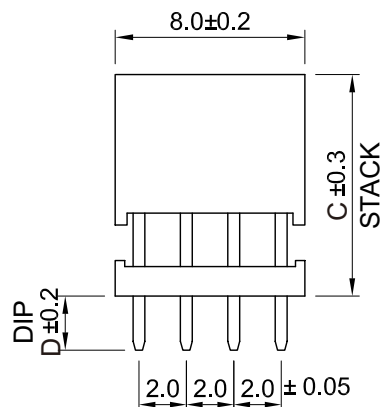

Specifications

Current Rating : 2 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Phosphor Bronze
 Insulator Material : Polyester, UL 94V-0 Nylon-6T
 Contact Plated : See Option
 Standard: Full Gold Flash

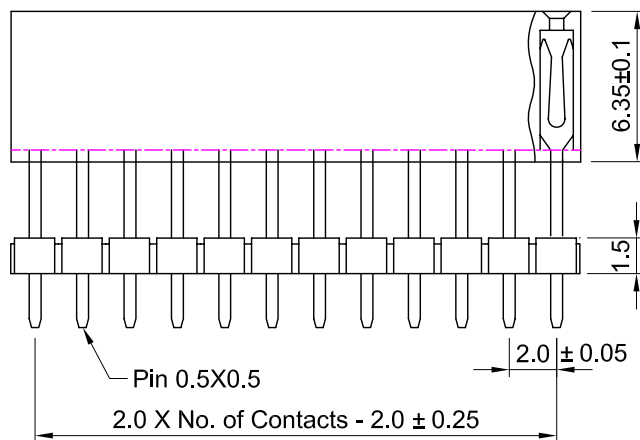

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

SE-Dxxxxxyy-4Xxx-LF

SERIES	DIP 180°	C:HIGH	D:DIP	LEADFREE
		193:19.3mm	013:1.3mm	4X02:08WAY
		130:13.0mm	130:13.0mm	4X30:120WAY

DESCRIPTION: Female Header P:2.0 X 2.0mm Profile:6.35mm Stacking ,Quad Row, Straight Type