


MATERIALS

- METAL SHIELD: COPPER ALLOY
- SPRING: COPPER ALLOY
- CLIP: STAINLESS STEEL
- HEAT SINK: ALUMINUM

DIM "A" OPTION
 14: 14.95mm
 22: 22.65mm

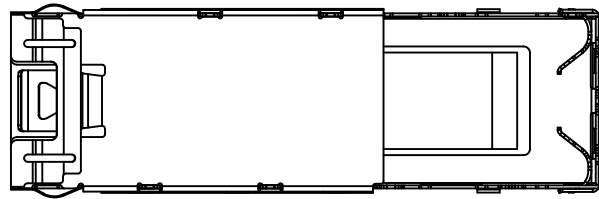

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ±


PJECTION

照片框

ORDER INFORMATION


SFP-SCQHSxx-20-LF
 SERIES | | | | LEADFREE
 20 WAY
 14:HIGH 14.95mm
 22:HIGH 22.65mm
 FEMALE | | | | HEAT SINK
 CAGE 90° PRESS FIT

DESCRIPTION: SFP PLUS CAGE, R/A, METAL SHIELD, PRESS FIT WITH HEAT SINK

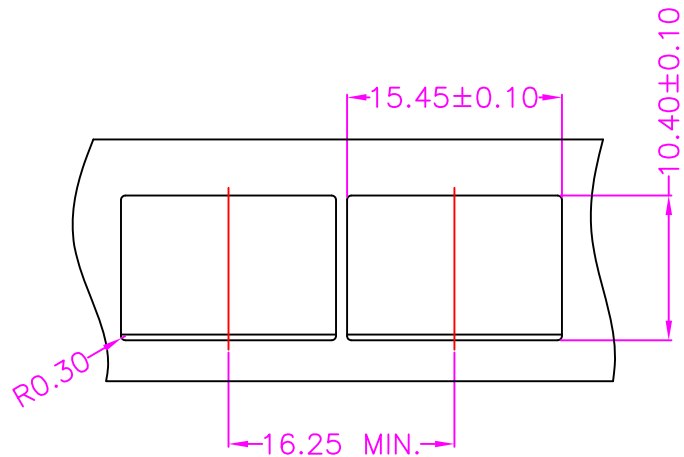

BEZEL

RECOMMENDED PANEL CUTOUT AND PC BOARD
PANEL POSITION AND THICKNESS 0.8–2.6

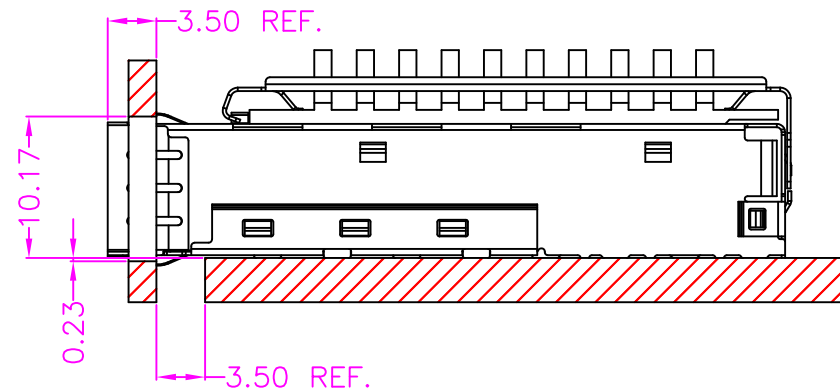

BEZEL OPENING
BELOW TOP OF PCB

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ±


PJECTION

照片框

ORDER INFORMATION


SFP-SCQHSxx-20-LF
SERIES | | | | LEADFREE
20 WAY
14:HIGH 14.95mm
22:HIGH 22.65mm
FEMALE | | | | HEAT SINK
CAGE 90° PRESS FIT

DESCRIPTION: SFP PLUS CAGE, R/A, METAL SHIELD, PRESS FIT WITH HEAT SINK

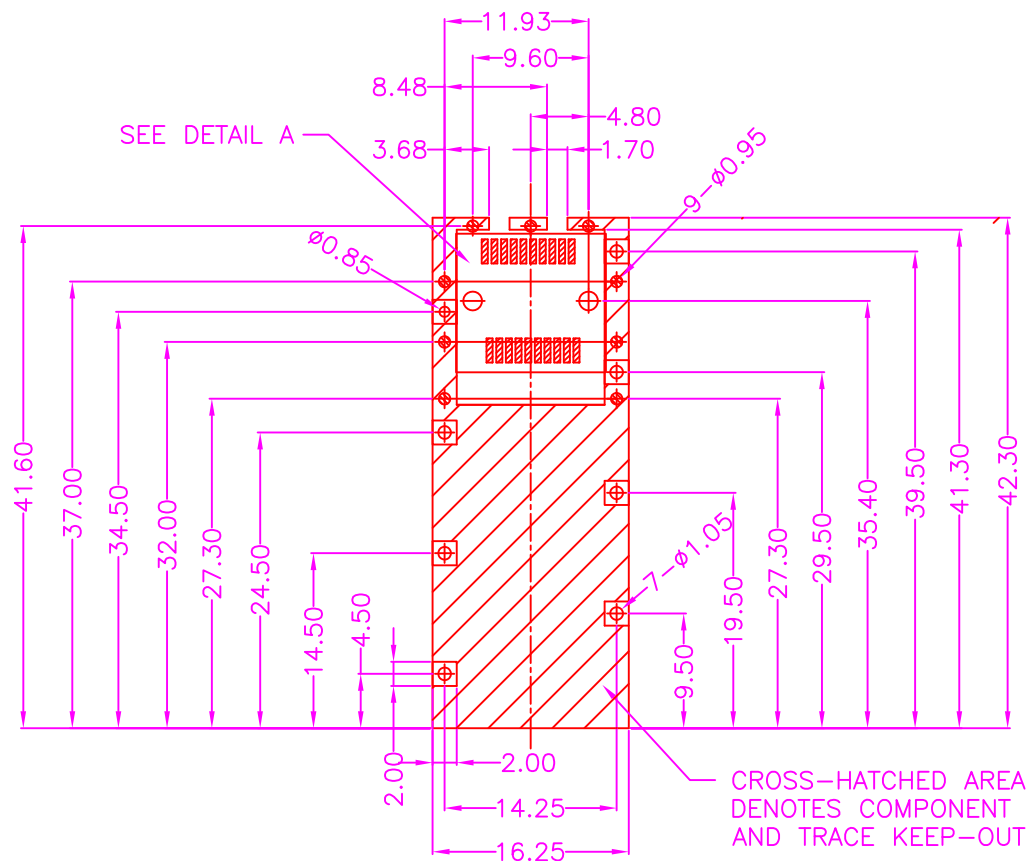

P.C.B LAYOUT
TOP VIEW ±0.05

NOTE: 7-Ø1.05
● 9-Ø0.95

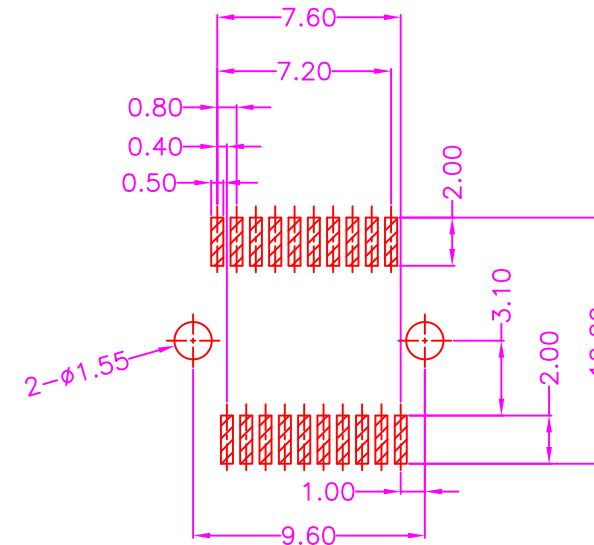

DETAIL A(SCALE 2:1)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±

照片框

ORDER INFORMATION

SFP-SCQHSxx-20-LF
 SERIES | T | T | T | T | LEADFREE
 | | | | | 20 WAY
 | | | | | 14:HIGH 14.95mm
 | | | | | 22:HIGH 22.65mm
 FEMALE | | | | | HEAT SINK
 CAGE 90° | | | | | PRESS FIT

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION

DESCRIPTION: SFP PLUS CAGE, R/A, METAL SHIELD, PRESS FIT WITH HEAT SINK