
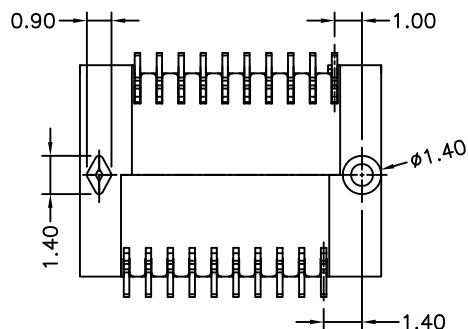
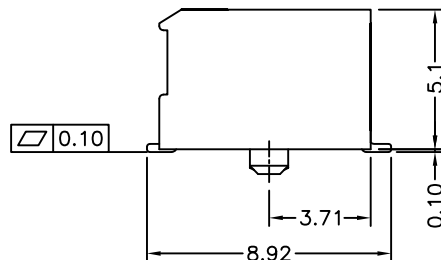
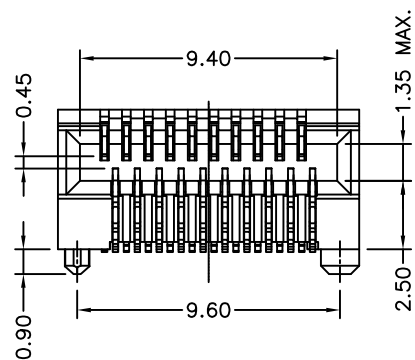
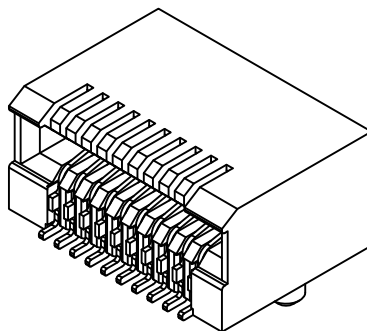


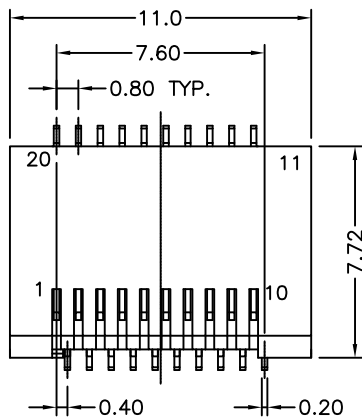


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 1.0 AMP MAX
DIELECTRIC WITHSTANDING: 300V AC FOR ONE MINUTE
CONTACT RESISTANCE: 40m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

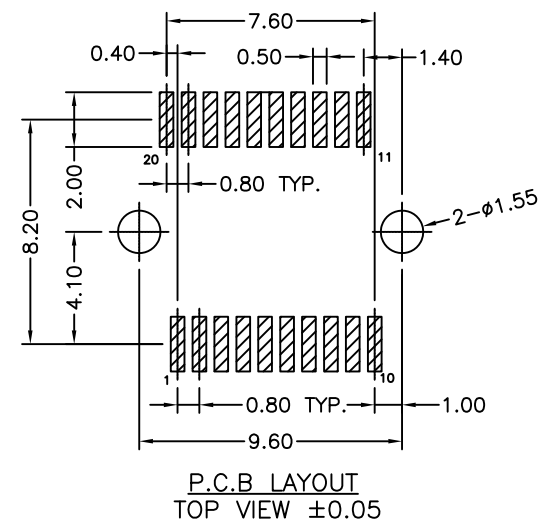

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ± 3°


PPOJECTION

照片框

ORDER INFORMATION

SFP-SWPR-20-LF
SERIES REEL POST 90°SMT FEMALE
20WAY LEADFREE

DESCRIPTION:

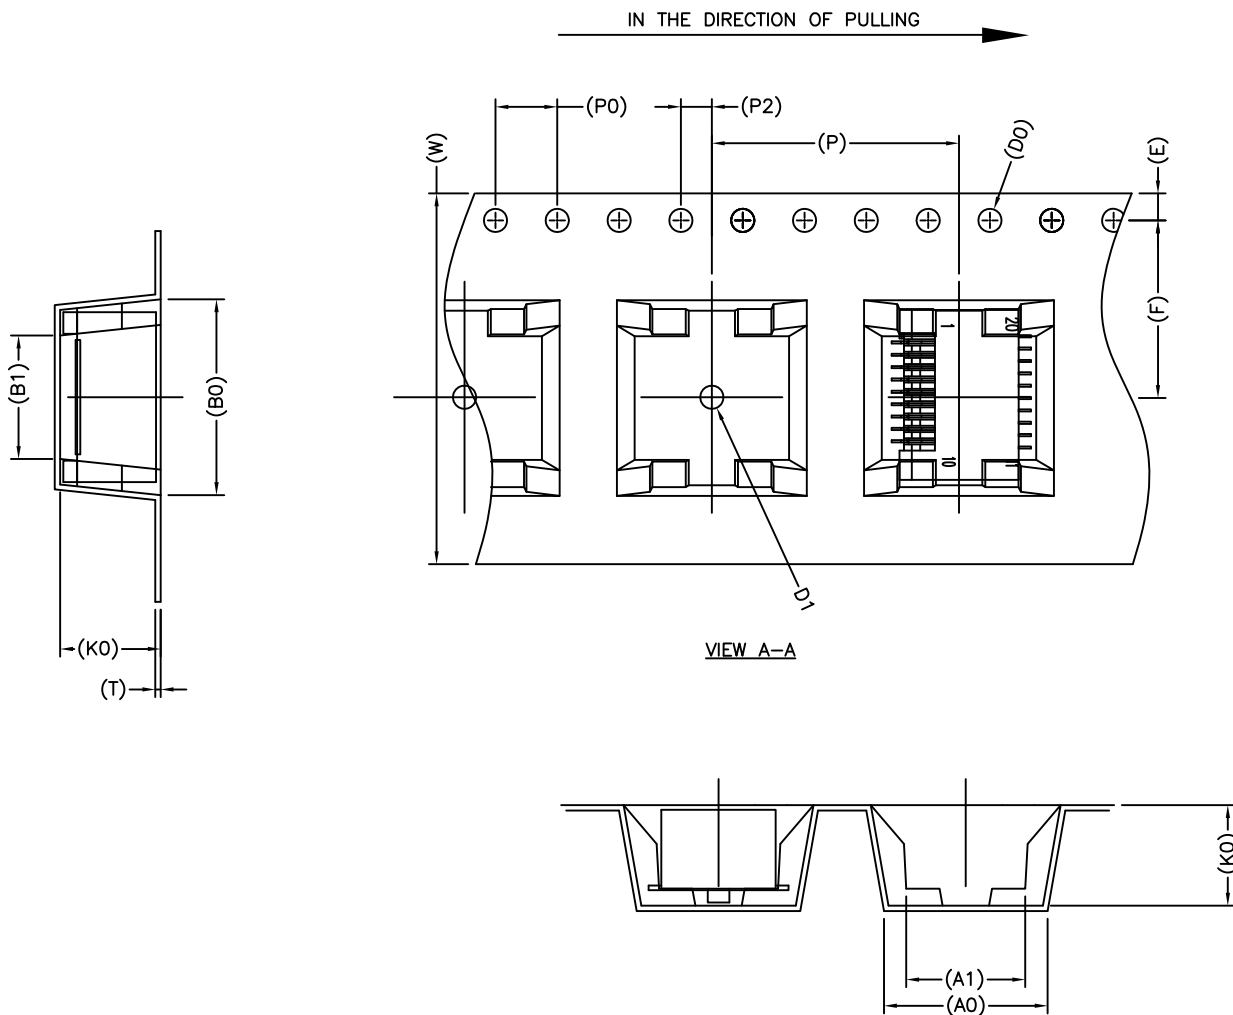

DIMENSION	
20 PIN	
W	24.00±0.30
E	1.75±0.10
F	11.50±0.10
P	16.00±0.10
T	0.35±0.05
P0	4.00±0.10
P2	2.00±0.10
D0	ø1.50+0.10
D1	ø1.50+0.10
A0	10.60±0.10
A1	8.00±0.10
B0	12.00±0.10
B1	8.00±0.10
K0	6.50±0.10

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ± 3°

PPOJECTION


照片框

ORDER INFORMATION

SFP-SWPR-20-LF
SERIES T T T T LEADFREE
20WAY
REEL
POST
90°SMT
FEMALE

DESCRIPTION:

REEL

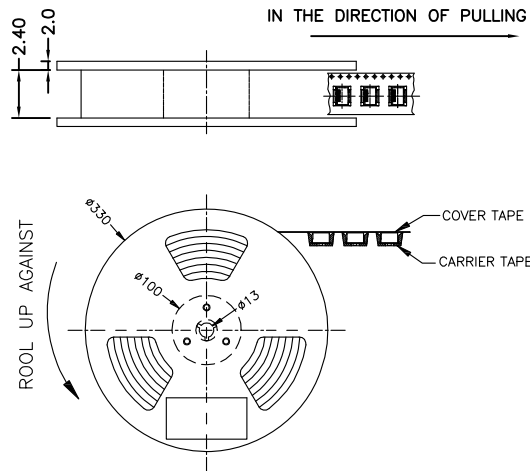


NOTE


REEL: PS
CARRIER: PS
COVERTAPE: PS

1REEL: 500 PCS
1CARTON: 2500 PCS

INNER (BOX)

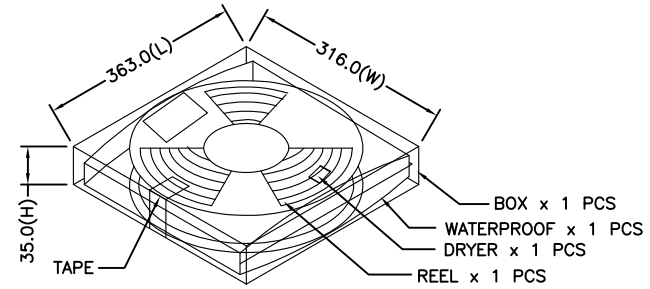

OUTER (CARTON)

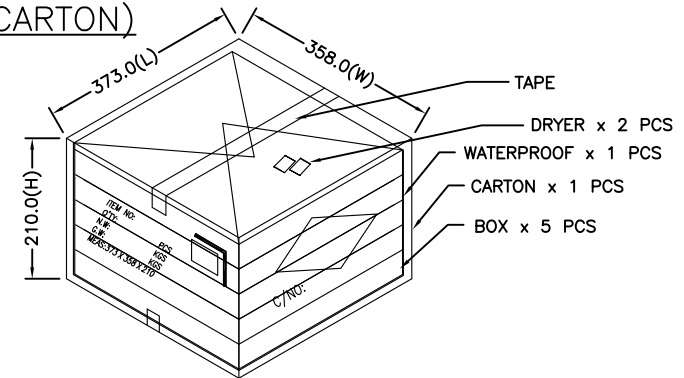

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ± 3°

照片框

ORDER INFORMATION

SFP-SWPR-20-LF
SERIES
REEL
POST
90°SMT
FEMALE
LEADFREE
20WAY

DESCRIPTION: