

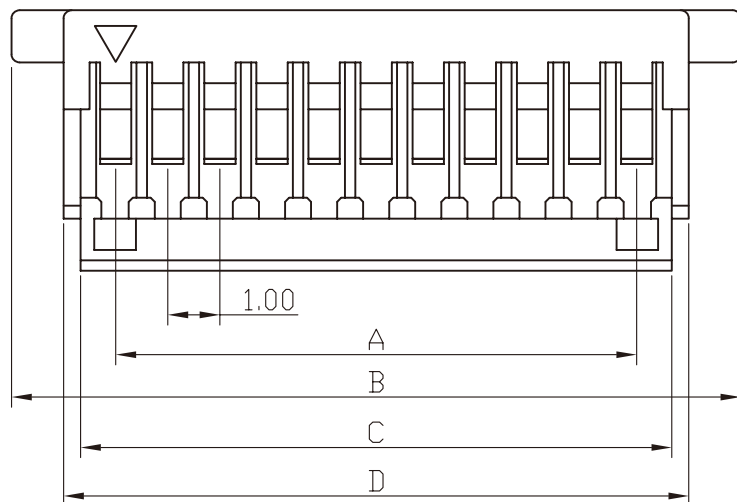


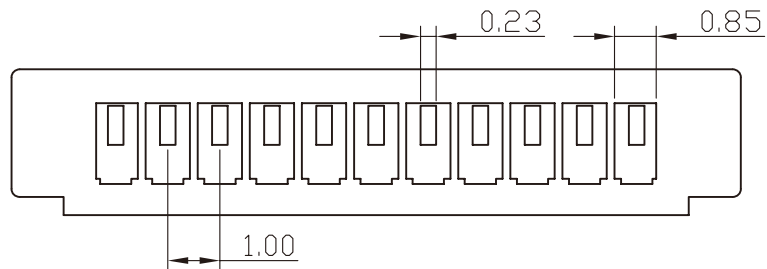

B尺寸公差如下:
2P~10P±0.10mm
11P~20P±0.20mm

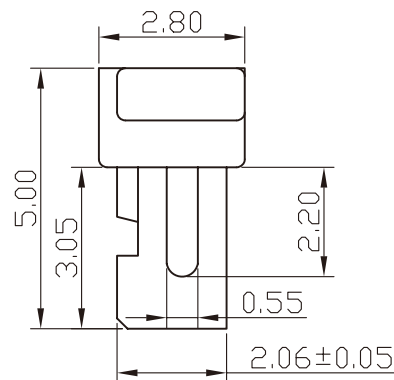

SPECIFICATIONS

Electrical

Current Rating: 1A AC, DC

Voltage Rating: 50V AC/ max.

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 100MΩ/ min.

Dielectric Withstanding Voltage: 500V AC/ min.

Contact Resistance: 20MΩ/ max.

Material

Material: PBT, UL94V-0

Poles	Dimension mm (in.)				Note.
	A	B	C	D	
2	1.0	5.0	2.37	3.00	
3	2.0	6.0	3.37	4.00	
4	3.0	7.0	4.37	5.00	
5	4.0	8.0	5.37	6.00	
6	5.0	9.0	6.37	7.00	
7	6.0	10.0	7.37	8.00	
8	7.0	11.0	8.37	9.00	
9	8.0	12.0	9.37	10.00	
10	9.0	13.0	10.37	11.00	
11	10.0	14.0	11.37	12.00	
12	11.0	15.0	12.37	13.00	
13	12.0	16.0	13.37	14.00	
14	13.0	17.0	14.37	15.00	
15	14.0	18.0	15.37	16.00	
16	15.0	19.0	16.37	17.00	
20	19.0	23.0	20.37	21.00	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.10
.XXX ±
ANG ±



ORDER INFORMATION

SH-H-xx-LF
SERIES | LEADFREE
02~20WAY
HOUSING

DESCRIPTION: 1.0mm Wire-to-Board Housing