

NOTES:

1.MATERIAL:

HOUSING:Halogen Free PLASTIC, HIGH TEMP
UL94V-0

TERMINAL:PHOSPER BRONZE(t=0.12mm)







2.PLATING: 1: Gold Flash(Lead Free)

L:120u" MIN Pure Tin(Lead Free)

N:120u" MIN Matt Tin(Lead Free)

3.Applicable Wire: AWG #32(7*0.08)

4.Insulation O.D.: 0.52 to 0.56mm

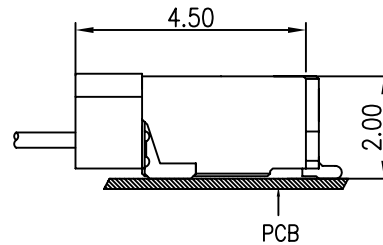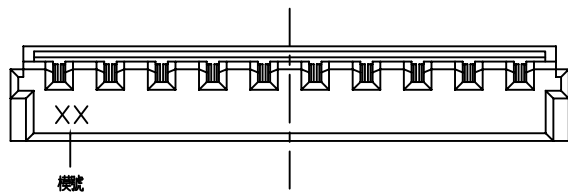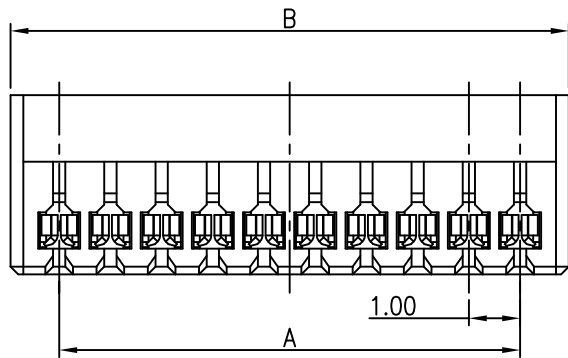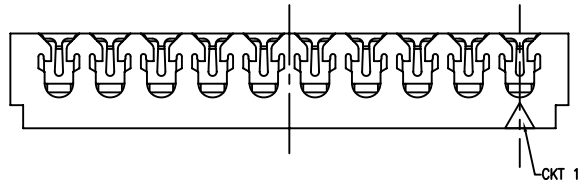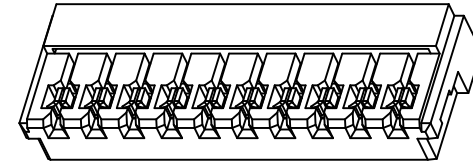

MATED CONDITION

CKT	Dim A	Dim B
2	1.00	2.90
3	2.00	3.90
4	3.00	4.90
5	4.00	5.90
6	5.00	6.90
7	6.00	7.90
8	7.00	8.90
9	8.00	9.90
10	9.00	10.90
11	10.00	11.90
12	11.00	12.90
13	12.00	13.90
14	13.00	14.90
15	14.00	15.90
16	15.00	16.90
17	16.00	17.90
18	17.00	18.90
19	18.00	19.90
20	19.00	20.90

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ± 2°

照片框

ORDER INFORMATION

SH-SI32X-xx-LF
SERIES | LEADFREE
02-20WAY
FLANGELESS
SOCKET/IDC

DESCRIPTION: 1.0mm Pitch IDC WTB Conn. CABLE SIDE