


NOTES:

1. MATERIAL: PHOSPHOR BRONZE C5191, THICKNESS 0.12 ± 0.02


2. PLATING

□: 50u" MIN. Ni Under Plated
150u" MIN. TIN ON CONTACT AREA.




3. Q'TY: 15K pcs/roll..



WIRE BARREL



INSULATION BARREL

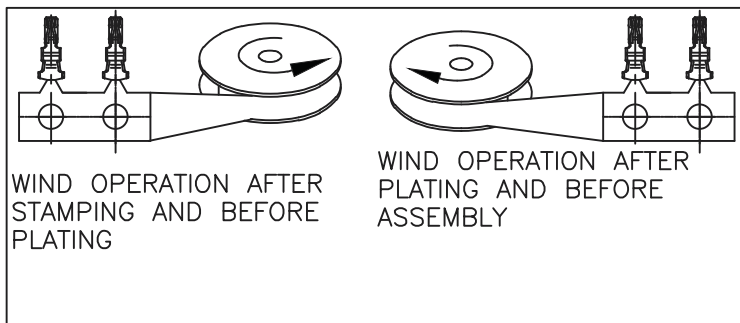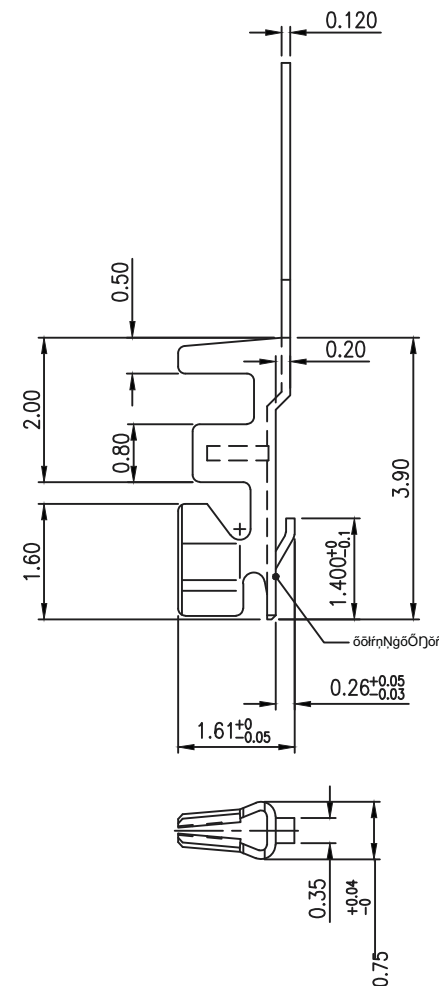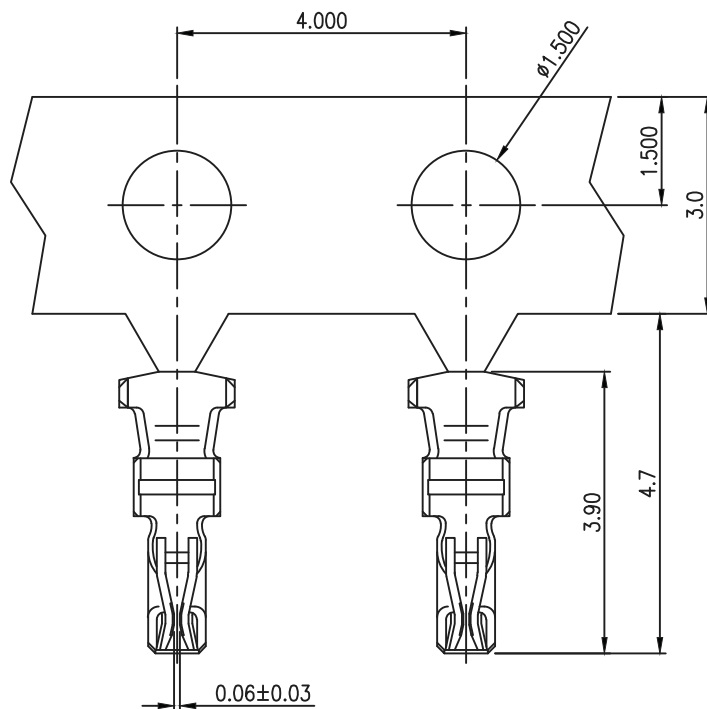

WIND OPERATION AFTER
STAMPING AND BEFORE
PLATING

WIND OPERATION AFTER
PLATING AND BEFORE
ASSEMBLY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG $\pm 2^\circ$

PPOJECTION

照片框

ORDER INFORMATION

SHD-T-28-LF
SERIES T LEADFREE
28 AWG
TERMINAL

DESCRIPTION: 1.0 mm W-T-B TERMINAL