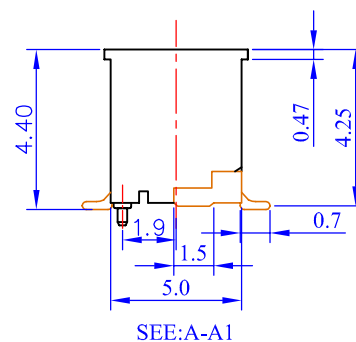
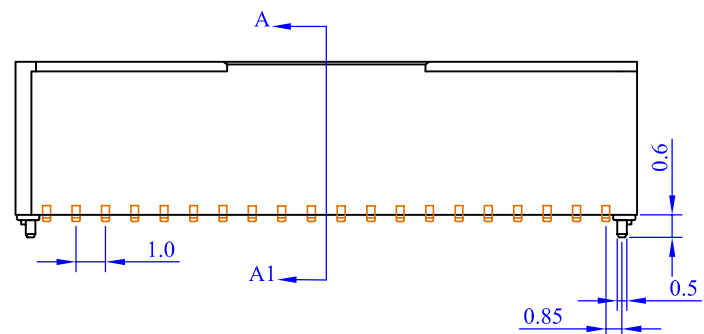
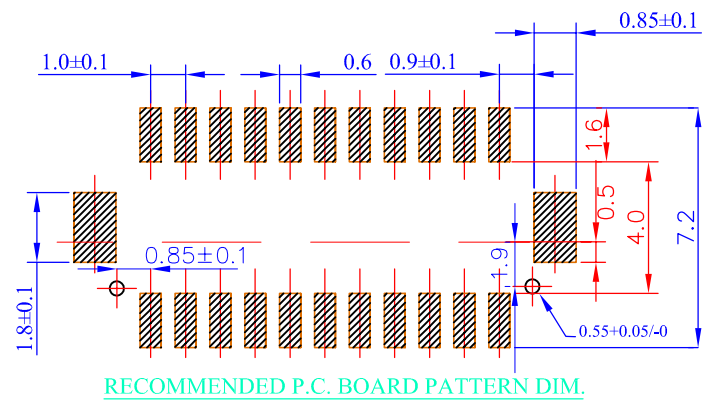
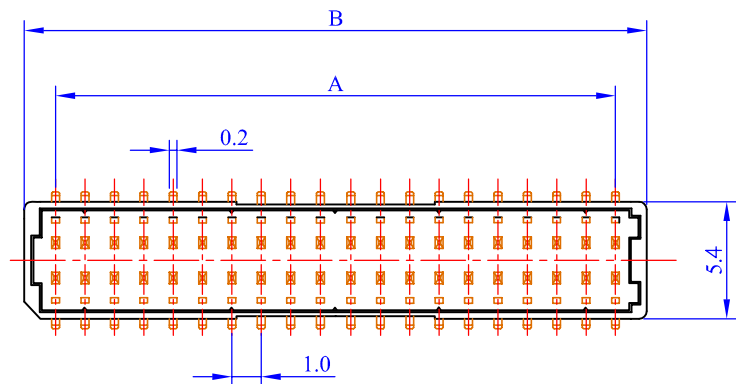


Specifications

Electrical

Voltage Rating: 50VAC DC
 Current Rating: 1.0A AC DC
 Contact Resistance: Initial value/20mΩmax
 After environmental testing/40mΩ max
 Insulation Resistance: 100MΩmin
 Temperature Range: -25℃~+85℃
 Withstanding voltage: 500V AC/minute

Material and Finish

Header contact: Phosphor bronze, nickel-undercoated, tin-plated
 Water: Glass-filled polyamide, UL94V-0, natural (ivory)
 Solder tad: Brass, copper-undercoated, tin/lead-plated

Circuits	Dimension mm (in.)		Part No.	Note.
	A	B		
2*10	9.0(.354)	12.3(.484)	SHD-VPTCR-20	
2*15	14.0(.551)	17.3(.681)	SHD-VPTCR-30	
2*20	19.0(.748)	22.3(.878)	SHD-VPTCR-40	
2*25	24.0(.945)	27.3(1.075)	SHD-VPTCR-50	

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ±

PPOJECTION





ORDER INFORMATION

SHD-VPTCR-xx-LF

SERIES
 180°SMT
 REEL
 CAP
 TIN
 POST
 LEADFREE
 20-50WAY

DESCRIPTION: SHD 1.0mm Wire to Board Wafer SMT 180W(雙排)

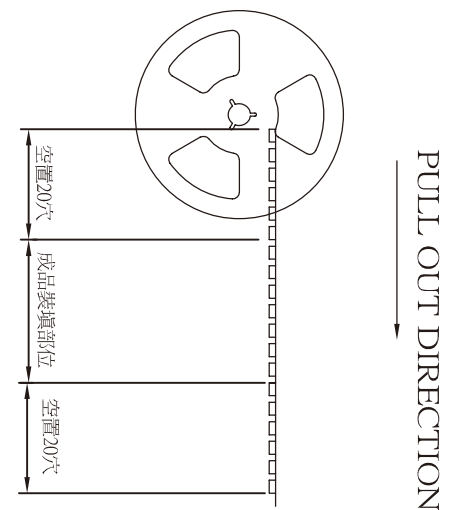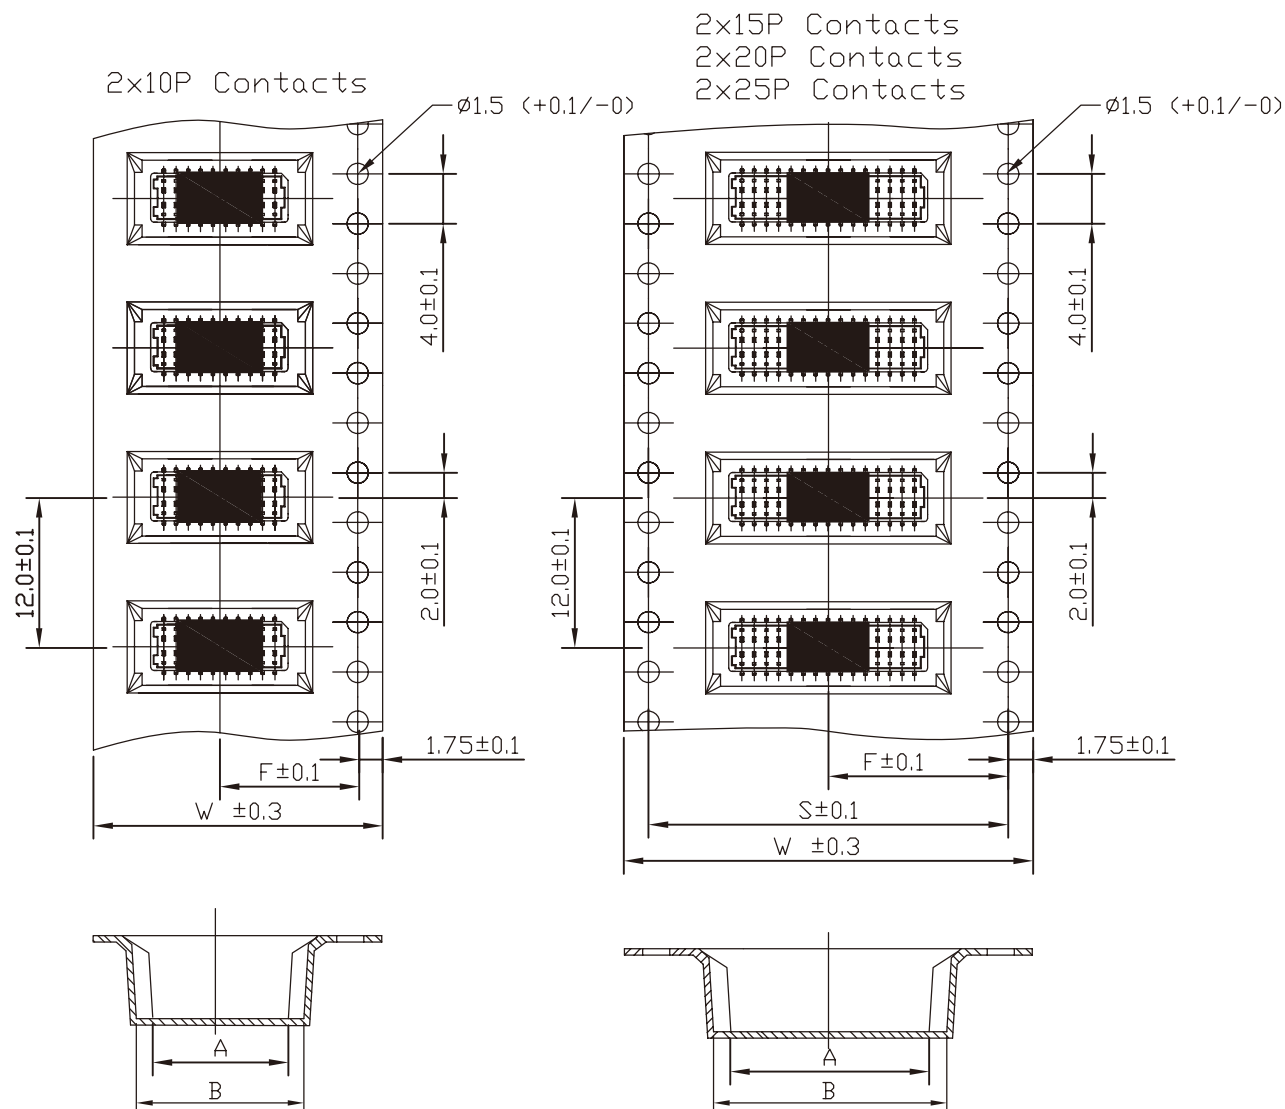

P=Poles	W	F	S	Q'TY/Reel
2x10P	24	11.5	28.4	1000PCS
2x15P	32	14.2	28.4	1000PCS
2x20P	44	20.2	40.4	1000PCS
2x25P	44	20.2	40.4	1000PCS

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ±



ORDER INFORMATION

SHD-VTCR-xx-LF
SERIES
LEADFREE
20~50WAY
REEL
CAP
TIN/PLATED
180°SMT

DESCRIPTION: 1.0mm Wire-to-Board Header SMT 180° Type Tape&Reel (Double Row)