

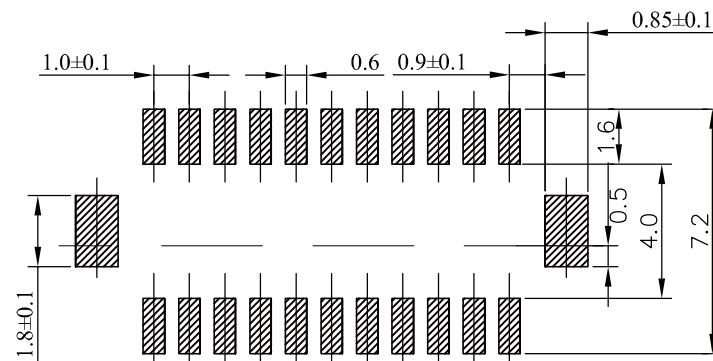
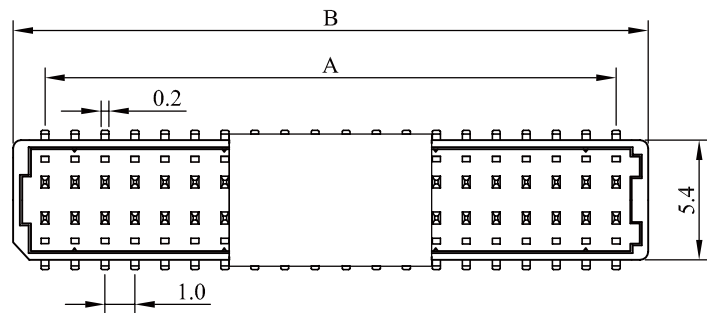
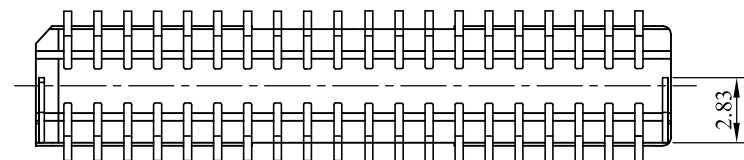




RECOMMENDED P.C. BOARD PATTERN DIM.

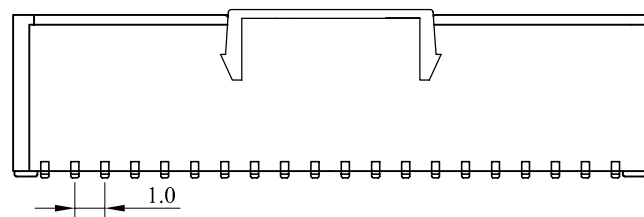

Specifications

Electrical

Voltage Rating: 50VAC DC

Current Rating: 1.0A AC DC

Contact Resistance: Initial value/20mΩmax

After environmental testing/40mΩmax

Insulation Resistance: 100MΩmin

Temperature Range: -25°C~+85°C

Withstanding voltage: 500V AC/minute

Material and Finish

Header contact: Phosphor bronze, nickel-undercoated, gold-plated

Water: Glass-filled polyamide, UL94V-0, natural (ivory)

Solder tab: Brass, copper-undercoated, tin/lead-plated

Circuits	Dimension mm (in.)		Part No.	Note.
	A	B		
2*10	9.0(.354)	12.3(.484)	SHD-VGCR-20	
2*15	14.0(.551)	17.3(.681)	SHD-VGCR-30	
2*20	19.0(.748)	22.3(.878)	SHD-VGCR-40	
2*25	24.0(.945)	27.3(.1075)	SHD-VGCR-50	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION



X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SHD-VXGCR-xx-LF
SERIES | | | | LEADFREE
20~50WAY
REEL
CAP
GOLD
NON POST
180°SMT

DESCRIPTION: SHD 1.0mm Wire to Board Wafer SMT 180W(雙排無柱)

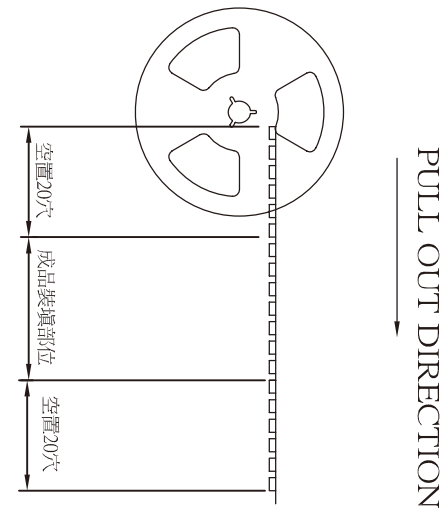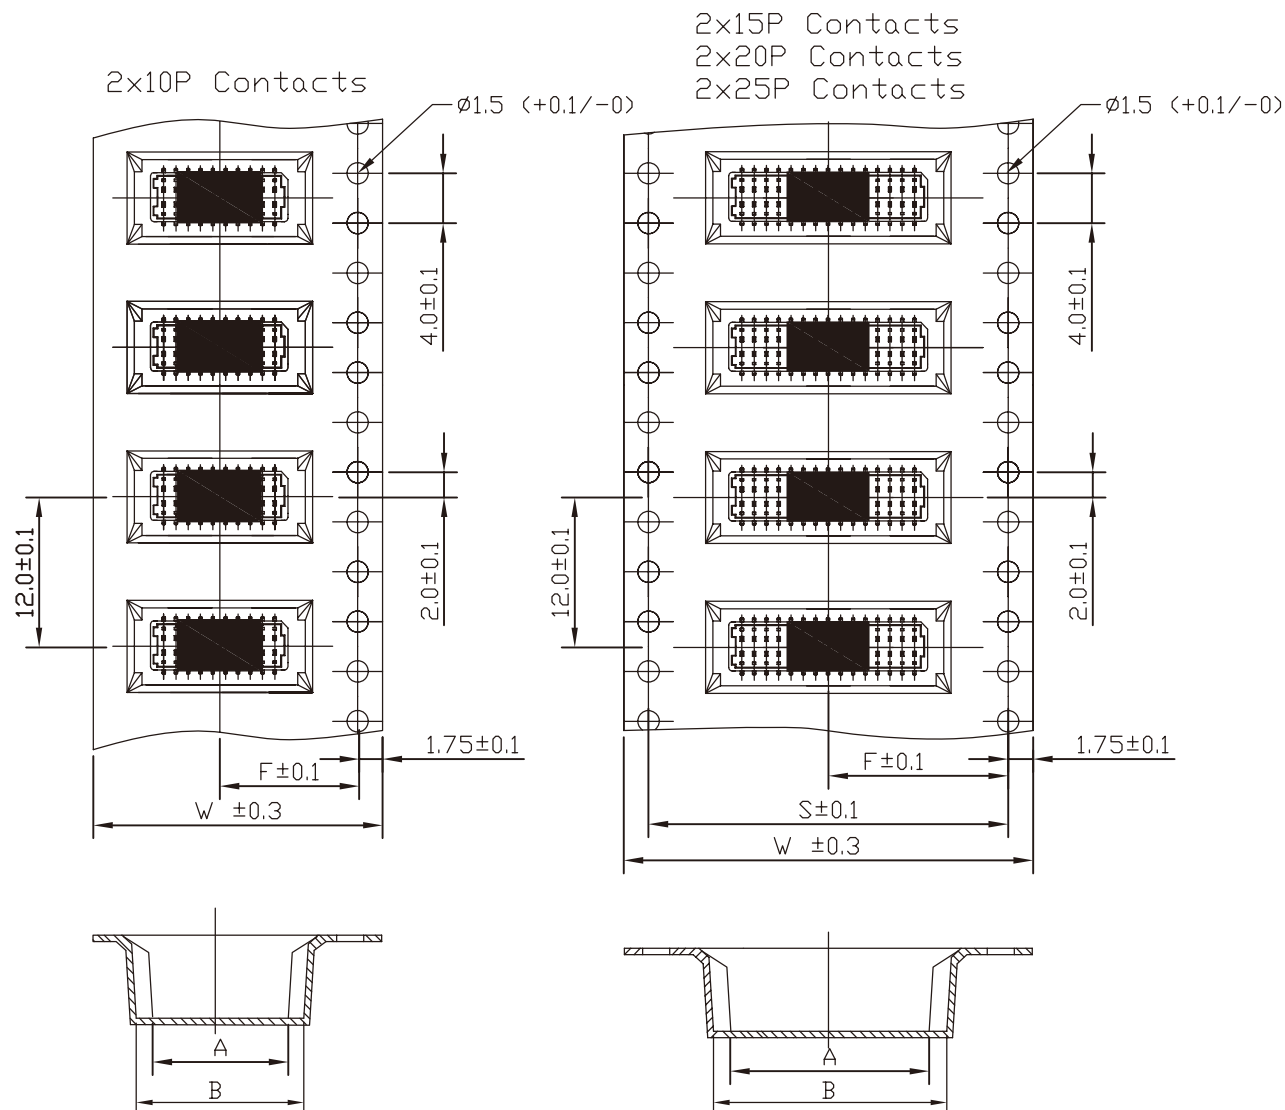

P=Poles	W	F	S	Q'TY/Reel
2x10P	24	11.5	28.4	1000PCS
2x15P	32	14.2	28.4	1000PCS
2x20P	44	20.2	40.4	1000PCS
2x25P	44	20.2	40.4	1000PCS

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SHD-VXGCR-xx-LF
SERIES
LEADFREE
20-50WAY
REEL
CAP
GOLD
NON POST
180°SMT

DESCRIPTION: 1.0mm Wire-to-Board Header SMT 180° Type Tape&Reel (Double Row)