

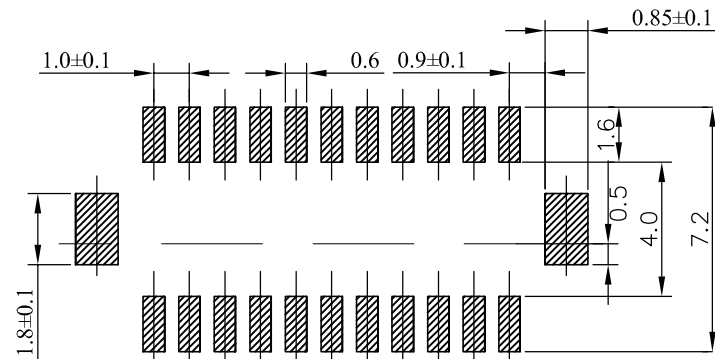
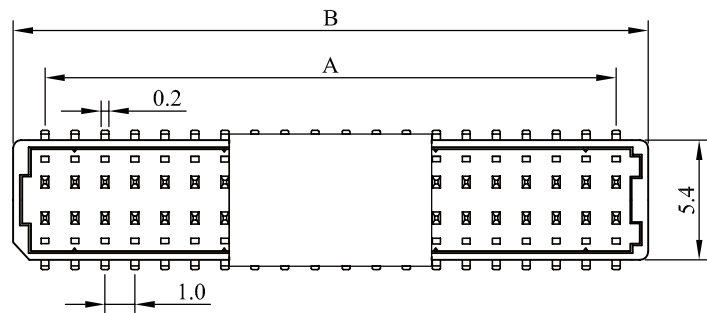
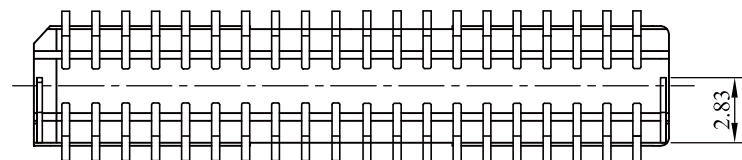




RECOMMENDED P.C. BOARD PATTERN DIM.

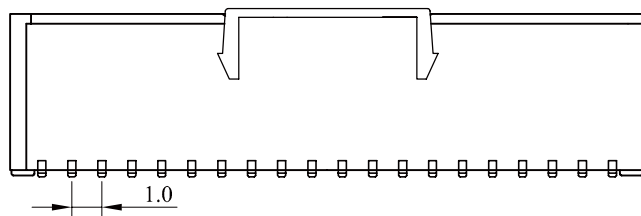

Specifications

Electrical

Voltage Rating: 50VAC DC

Current Rating: 1.0A AC DC

Contact Resistance: Initial value/20mΩmax

After environmental testing/40mΩmax

Insulation Resistance: 100MΩmin

Temperature Range: -25℃~+85℃

Withstanding voltage:500V AC/minute

Material and Finish

Header contact:Phosphor bronze,nickel-undercoated,
tin-plated

Water:Glass-filled polyamide,UL94V-0,natural(ivory)

Solder tab:Brass,copper-undercoated,tin/lead-plated

Circuits	Dimension mm (in.)		Part No.
	A	B	
2*10	9.0(.354)	12.3(.484)	SHD-VXTC-20
2*15	14.0(.551)	17.3(.681)	SHD-VXTC-30
2*20	19.0(.748)	22.3(.878)	SHD-VXTC-40
2*25	24.0(.945)	27.3(.1.075)	SHD-VXTC-50

RoHS Compliant

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION



ORDER INFORMATION

SHD-VXTC-xx-LF
SERIES | | | LEADFREE
20~50WAY
CAP
TIN
NON POST
180°SMT

DESCRIPTION: SHD 1.0mm Wire to Board Wafer SMT 180W(雙排無柱)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com