


Section A-A

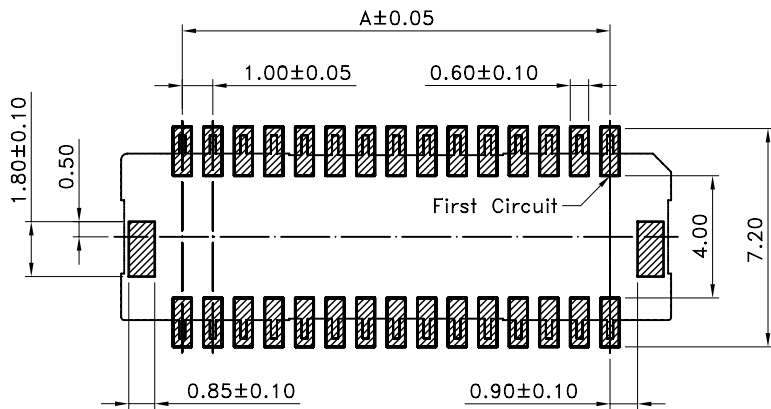

Recommended P.C.B. Layout

■ SPECIFICATIONS

- Voltage rating : 50V AC/DC
- Current rating : 1A AC/DC
- Withstanding voltage : 1,000V AC/minute
- Insulation resistance : 1,000MΩ min.
- Temperature range : - 25°C to + 85°C
- Contact resistance : 20mΩ max.
- Peel Strength of Cover Tape :10gf-130gf

■ WAFER

- Poles : 20,30,40,50
- Material : Contact : Phosphor Bronze,Gold Plated
Base : Nylon PA9T UL 94V-0
- Q' ty : 1,000pcs./Tape&Reel

Poles	Part No.	Dimensions(mm)	
		A	B
20	SHLD-VXC-20	9.0	13.0
30	SHLD-VXC-30	14.0	18.0
40	SHLD-VXC-40	19.0	23.0
50	SHLD-VXC-50	24.0	28.0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION

照片框

ORDER INFORMATION

SHLD-VXC-xx-LF

SERIES | LEADFREE
20-50WAY
CAP
NON POST
180°SMT

DESCRIPTION: