


Section A-A

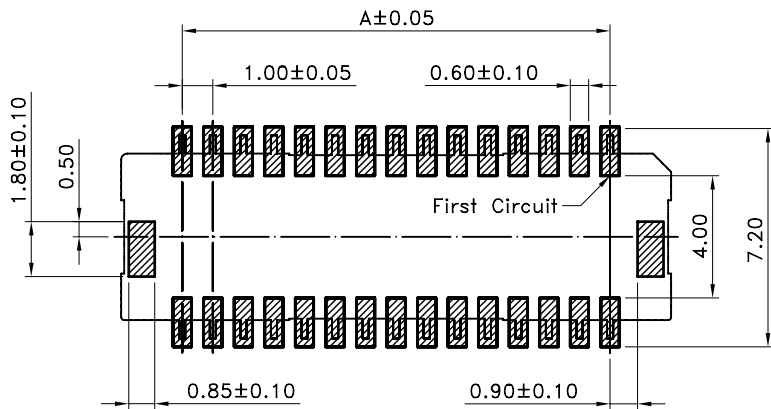

Recommended P.C.B. Layout

■ SPECIFICATIONS

- Voltage rating : 50V AC/DC
- Current rating : 1A AC/DC
- Withstanding voltage : 1,000V AC/minute
- Insulation resistance : 1,000M Ω min.
- Temperature range : - 25°C to + 85°C
- Contact resistance : 20m Ω max.
- Peel Strength of Cover Tape :10gf-130gf

■ WAFER

- Poles : 20,30,40,50
- Material : Contact : Phosphor Bronze,Gold Plated
Base : Nylon PA9T UL 94V-0
- Q' ty : 1,000pcs./Tape&Reel

Poles	Part No.	Dimensions(mm)	
		A	B
20	SHLD-VXCR-20	9.0	13.0
30	SHLD-VXCR-30	14.0	18.0
40	SHLD-VXCR-40	19.0	23.0
50	SHLD-VXCR-50	24.0	28.0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

ANG±

SIZE A4

PJECTION

照片框

ORDER INFORMATION





SHLD-VXCR-xx-LF

SERIES | | | LEADFREE
20-50WAY
REEL
CAP
NON POST
180°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION:

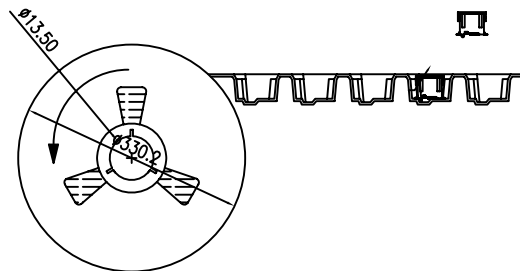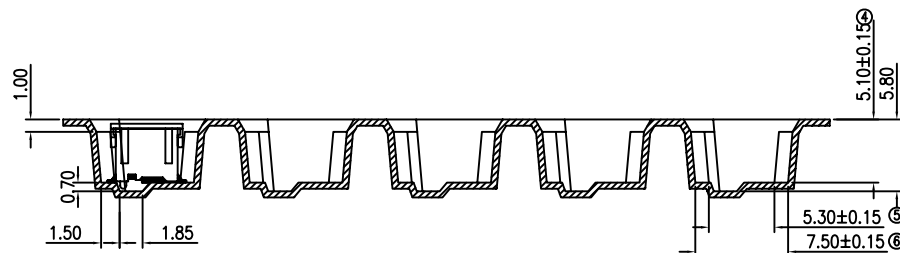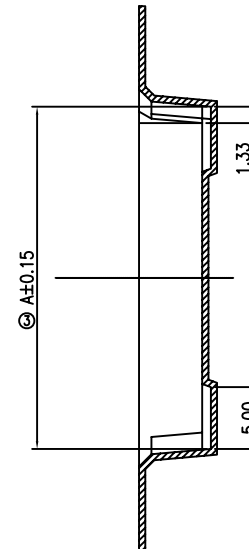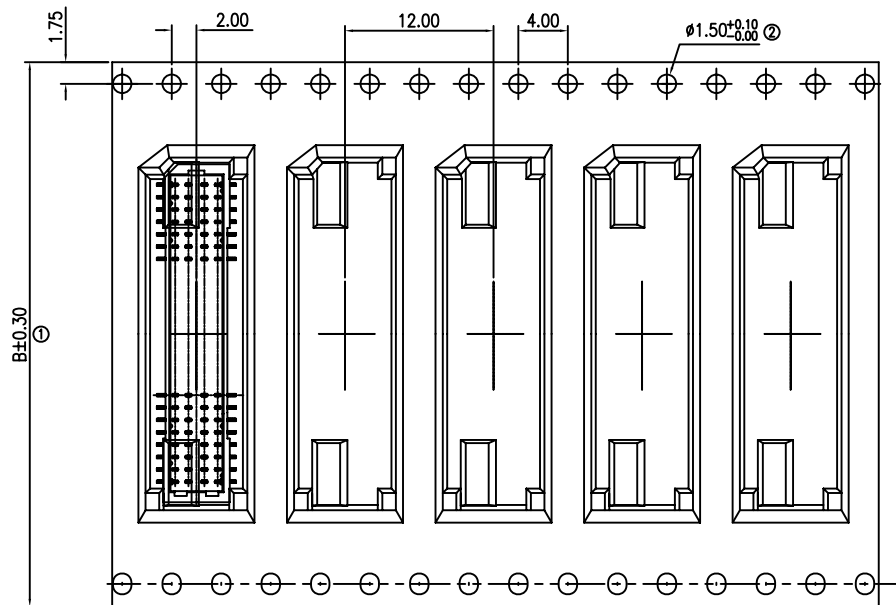

NOTE:

1. 10 Sprocket hole pitch cumulant tolerance ± 0.20
2. MATERIAL: Transparent PS
3. All dimensions meet EIA-481-B requirements
4. Packing: 1000PCS / Reel
5. THE DIMENSION WITH "Ⓢ" IS IMPORTANT DIMENSION.
6. Component load 13" Paper (Plastic) Plate, Reel Long: 12.5 Meters.

Poles	Part No.	A	B	孔位
2X10	SHLD-VXCR-20	12.65	24.00	单边孔
2X15	SHLD-VXCR-30	17.65	32.00	双边孔
2X20	SHLD-VXCR-40	22.65	44.00	
2X25	SHLD-VXCR-50	27.65	44.00	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION

照片框

ORDER INFORMATION

SHLD-VXCR-xx-LF

SERIES LEADFREE
20-50WAY
REEL
CAP
NON POST
180°SMT

DESCRIPTION: